

CUBE is an outdoor wall lamp with special optical design. The design is simple and rich in texture. It is composed of die-casting aluminum, polarized lens and tempered glass. The high-quality outdoor special powder coating process is adopted to make the lamp have strong weather resistance and anti-aging function, and the protection level of the lamp is IP65/IK07.

The lamp adopts two polarized lens modules, large-angle polarized lens and wall-washing lens, which are anti-glare and have a large shielding angle. There are three light distribution modes of direct light, direct light + indirect light, and indirect light to choose from, which can meet the needs of various scenes.

The lamp housing is made of integrated die-casting aluminum with good heat dissipation performance. DALI dimming optional. Convenient installation and maintenance. We provide 5 years warranty. The lamp is suitable for indoor and outdoor facade lighting, architectural decorative lighting, etc.

Features

Simple and rich textured design

Modular polarized lens design, various light distribution modes can be combined

Single indirect/ direct light or both indirect and direct light optional

Anti-glare design with large shielding angle

Lamp protection grade IP65/IK07


5 years warranty

Application Areas

Suitable for indoor and outdoor facade lighting, architectural decorative lighting, etc.





Technical data

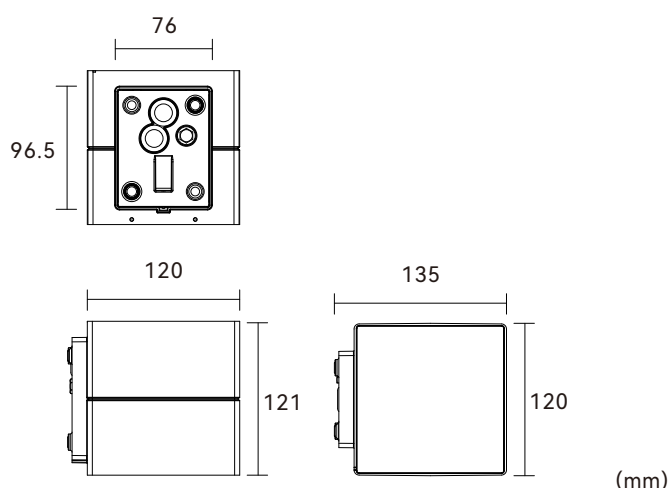

Item No.	B4CU0-06360-NN	B4CU0-06360-DN	B4CU0-12360-NN	B4CU0-12360-DN
	B4CU0-06X60-NN, the eighth X is CCT (2=2700K / 3=3000K / 5=4000K)			
Input Power(±10%)	6W		12W	
Input Voltage	AC220~240V			
Power Factor	≥0.9			
Luminous Flux(±10%)	500lm		995lm	
Colour temperature(±200K)	2700K/3000K/4000K			
Optic	Asymmetric optics			
Color Rendering Index	>80			
Life Time	L70(B50)50,000H			
Colour consistency SDCM	<5			
Dimming	NO	DALI	NO	DALI
Housing Color	Black / Dark Grey / White / Silver			
Fixture Materia	6063AL			
Protection Level	IP65/IK07			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+40°C			
Net Weight	1.5kg			
Size	135*121*120mm			
Package size	169*169*160mm (1 PCS) / 366*366*193mm (4 PCS)			
20GP	4600pcs			
40GP	9360pcs			

Technical data

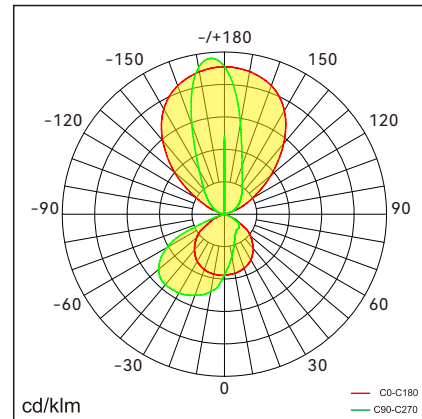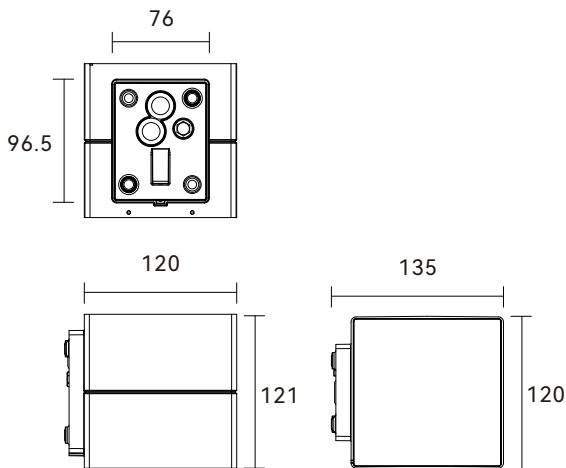

Item No.	B4CU0-12366-NN	B4CU0-12366-DN	B4CU0-24366-NN	B4CU0-24366-DN
	B4CU0-12X66-NN, the eighth X is CCT (2=2700K / 3=3000K / 5=4000K)			
Input Power(±10%)	12W (↑ 6W/6W ↓)		24W (↑ 12W/12W ↓)	
Input Voltage	AC220~240V			
Power Factor	≥0.9			
Luminous Flux(±10%)	1050lm (↑ 550lm/500lm ↓)		2115lm (↑ 1120lm/995lm ↓)	
Colour temperature(±200K)	2700K/3000K/4000K			
Optic	Asymmetric optics			
Color Rendering Index	>80			
Life Time	L70(B50)50,000H			
Colour consistency SDCM	<5			
Dimming	NO	DALI	NO	DALI
Housing Color	Black / Dark Grey / White / Silver			
Fixture Materia	6063AL			
Protection Level	IP65/IK07			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+40°C			
Net Weight	1.5kg			
Size	135*121*120mm			
Package size	169*169*160mm (1 PCS) / 366*366*193mm (4 PCS)			
20GP	4600pcs			
40GP	9360pcs			



Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9,Building 3,Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.