
## **BOOK-F**



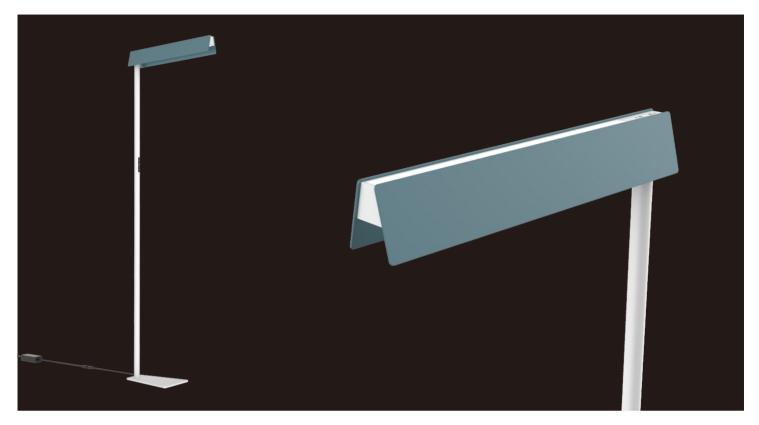

Mainimalist design, rich texture, perfect assembly and detail, exquisite surface treatment give Book a unique and charming appearance; uniform light distribution through different beam angle (100° upper light and 82° lower light), allowing you to enjoy a soft, healthy and wonderful lighting experience; The main materials are aluminum profiles, steel, PMMA; Easy to install, no need for a professional electrician.

## **Features**

Compact and quality appearance, patent design with rich texture and visual impacttexture and visual impact

Conductive pin design makes installation more convenient

Support for smart control functions

- Touch panel dimming
- Motion sensor


5 years warranty




## **Application Areas**

Open office, reading room, etc.




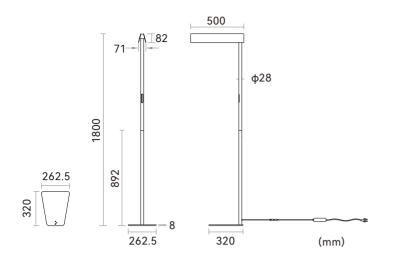



| Item No.                | BBKJ-1806020-BN-01  | BBKJ-1806020-BM-01 |
|-------------------------|---|--------------------|
| Input Power(±10%)       | ↑ 40W/20W ↓   |                    |
| Input Voltage           | 220~240VAC  |                    |
| Power Factor            | ≥0.9  |                    |
| Luminous Flux(±10%)     | ↑6000lm/1800lm↓   |                    |
| UGR                     | C0 <17  |                    |
| Color Rendering Index   | >80   |                    |
| Life Time               | L80(B10)50,000H   |                    |
| Beam Angle              | ↑100°/82°↓  |                    |
| CCT(±150K)              | 3000/4000/5700K   |                    |
| Colour consistency SDCM | < 3   |                    |
| Dimming                 | Touch panel dimming   |                    |
| Sensor                  | NO  | Motion sensor      |
| Housing Color           | Silver / White / Black / Madeira brown / Blackberry leaf green / Hermosa pink / Spruce blue |                    |
| Fixture Materia         | 6063AL  |                    |
| Protection Level        | IP20  |                    |
| Storage Temperature     | -40°C~+80°C   |                    |
| Working Temperature     | -20°C~+40°C   |                    |
| Net Weight              | 6.5kg   |                    |
| Gross Weight            | 8.5kg   |                    |
| Package size            | 1057*343*145mm (1pcs)   |                    |
| 20GP                    | 544pcs  |                    |
| 40GP                    | 1120pcs   |                    |
| 40HQ                    | 1260pcs   |                    |



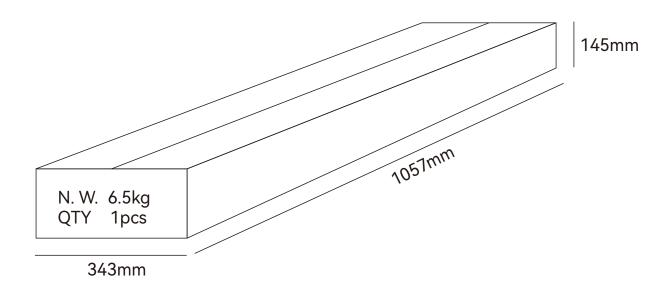



Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: <u>info@nexol-lighting.com</u> www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting. Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.