

Luna is an outdoor wall light with a simple design and rich texture. It is designed with a high-quality glass cover, and realizes an all-around, even and soft lighting effect. The color temperature can be adjusted by dialing, which can be flexibly adapted to different scenarios.

It adopts high quality outdoor special powder coating process, which makes the luminaire has a strong weather resistance and anti-aging function, Whose protection class is IP65/IK06. We provide 5 years warranty, the lamp is suitable for building entrances and external surrounding areas, outdoor corridors, platforms, passages, public areas in residential areas and so on.

Features

High-quality glass diffuser design uniform, soft lighting in all directions

Clear, uniform illumination with no edge shadows for a more comfortable space.

DIP switch adjustable CCT for flexible adaptation to various applications

Facilitates multi-luminaire installation and significantly simplifies wiring

Lamp protection grade IP65/IK06



5 years warranty

Application Areas

Building entrances and outdoor perimeter areas,
Outdoor corridors, terraces, and walkways,
Public areas in residential communities, etc.





Technical data

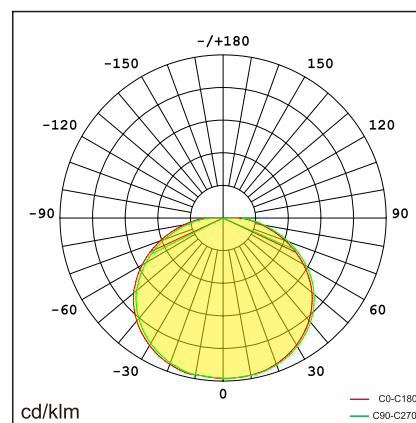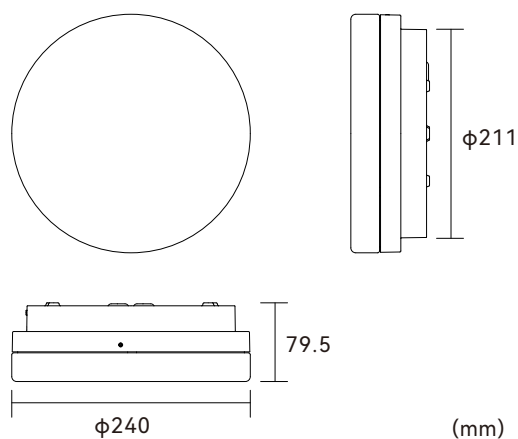


Item No.	B4LA0-12380-NN	B4LA0-12580-NN	B4LA0-12380-DN	B4LA0-12580-DN
Input Power(±10%)	12W			
Input Voltage	AC200~240V			
Luminous Flux(±10%)	1300lm			
Colour temperature(±10%)	3000K/4000K(CCT switchable)			
Beam Angle	130°			
Color Rendering Index	>80			
Life Time	L70(B50)50,000H			
Colour consistency SDCM	<3			
Dimming	ON/OFF		DALI	
Sensor	NO			
Housing Color	Black/White/Silver/Dark Grey			
Fixture Materia	ADC12+Glass			
Protection Level	IP65/IK06			
Storage Temperature	-30°C~-+60°C			
Working Temperature	-30°C~-+45°C			
Net Weight	3.2 kg			
size	φ240X79.5 mm			
Package size	350*333*333 mm (2 Pcs)			
20GP	1610 Pcs			
40GP	3430 Pcs			
40HQ	3850 Pcs			

Technical data

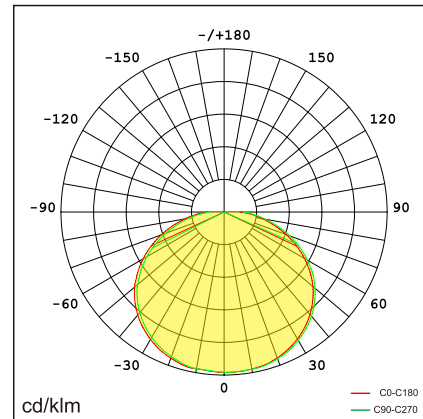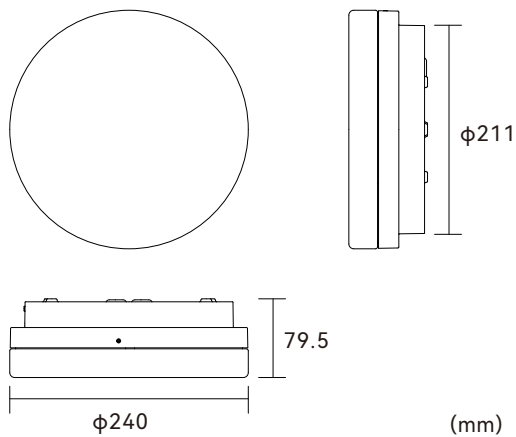

Item No.	B4LA0-24380-NN	B4LA0-24580-NN	B4LA0-24380-DN	B4LA0-24580-DN
Input Power(±10%)	24W			
Input Voltage	AC200~240V			
Luminous Flux(±10%)	2630lm			
Colour temperature(±10%)	3000K/4000K(CCT switchable)			
Beam Angle	130°			
Color Rendering Index	>80			
Life Time	L70(B50)50,000H			
Colour consistency SDCM	<3			
Dimming	ON/OFF		DALI	
Sensor	NO			
Housing Color	Black/White/Silver/Dark Grey			
Fixture Materia	ADC12+Glass			
Protection Level	IP65/IK06			
Storage Temperature	-30°C~+60°C			
Working Temperature	-30°C~+45°C			
Net Weight	3.2 kg			
size	φ240X79.5 mm			
Package size	350*333*333 mm (2 Pcs)			
20GP	1610 Pcs			
40GP	3430 Pcs			
40HQ	3850 Pcs			

Packaging

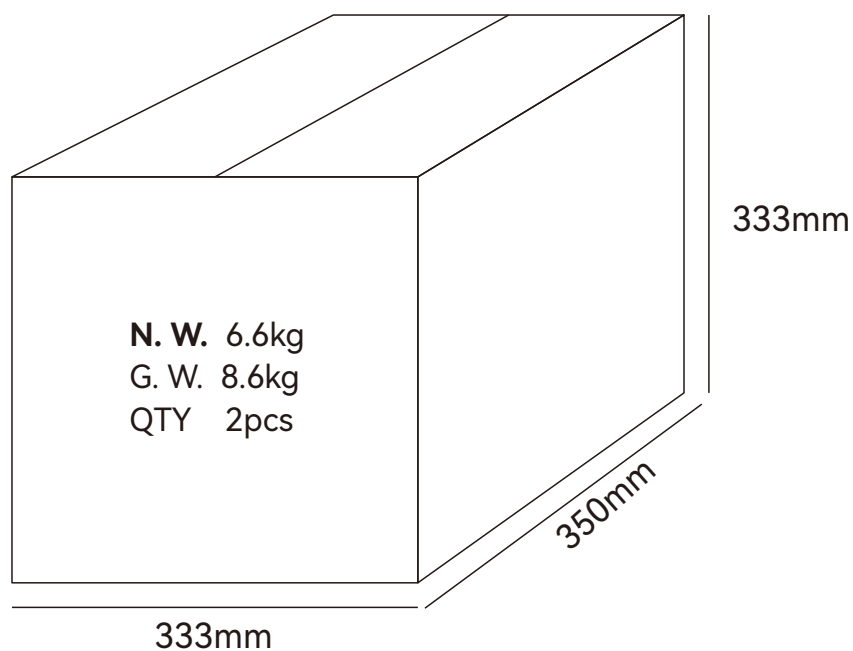

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9,Building 3,Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.
Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.