

OFFICE & ARCHITECTURE LIGHTING

NEXOL
NEW EXPERIENCE OF LIGHTING

PRODUCT CATALOGUE 2026

2026

NEXOL
NEW EXPERIENCE OF LIGHTING

Shenzhen Nexol Lighting Technology Co.,Ltd.

Shenzhen,China

E-mail:info@nexol-lighting.com

www.nexol-lighting.com


All parameters in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.
Information provided is subject to change without notice. Please verify all details with NEXOL Lighting. Copyright Shenzhen Nexol Lighting Co., Ltd. All rights reserved.

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 200K. Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.



「NEW
EXPERIENCE
OF
LIGHTING」

HISTORY

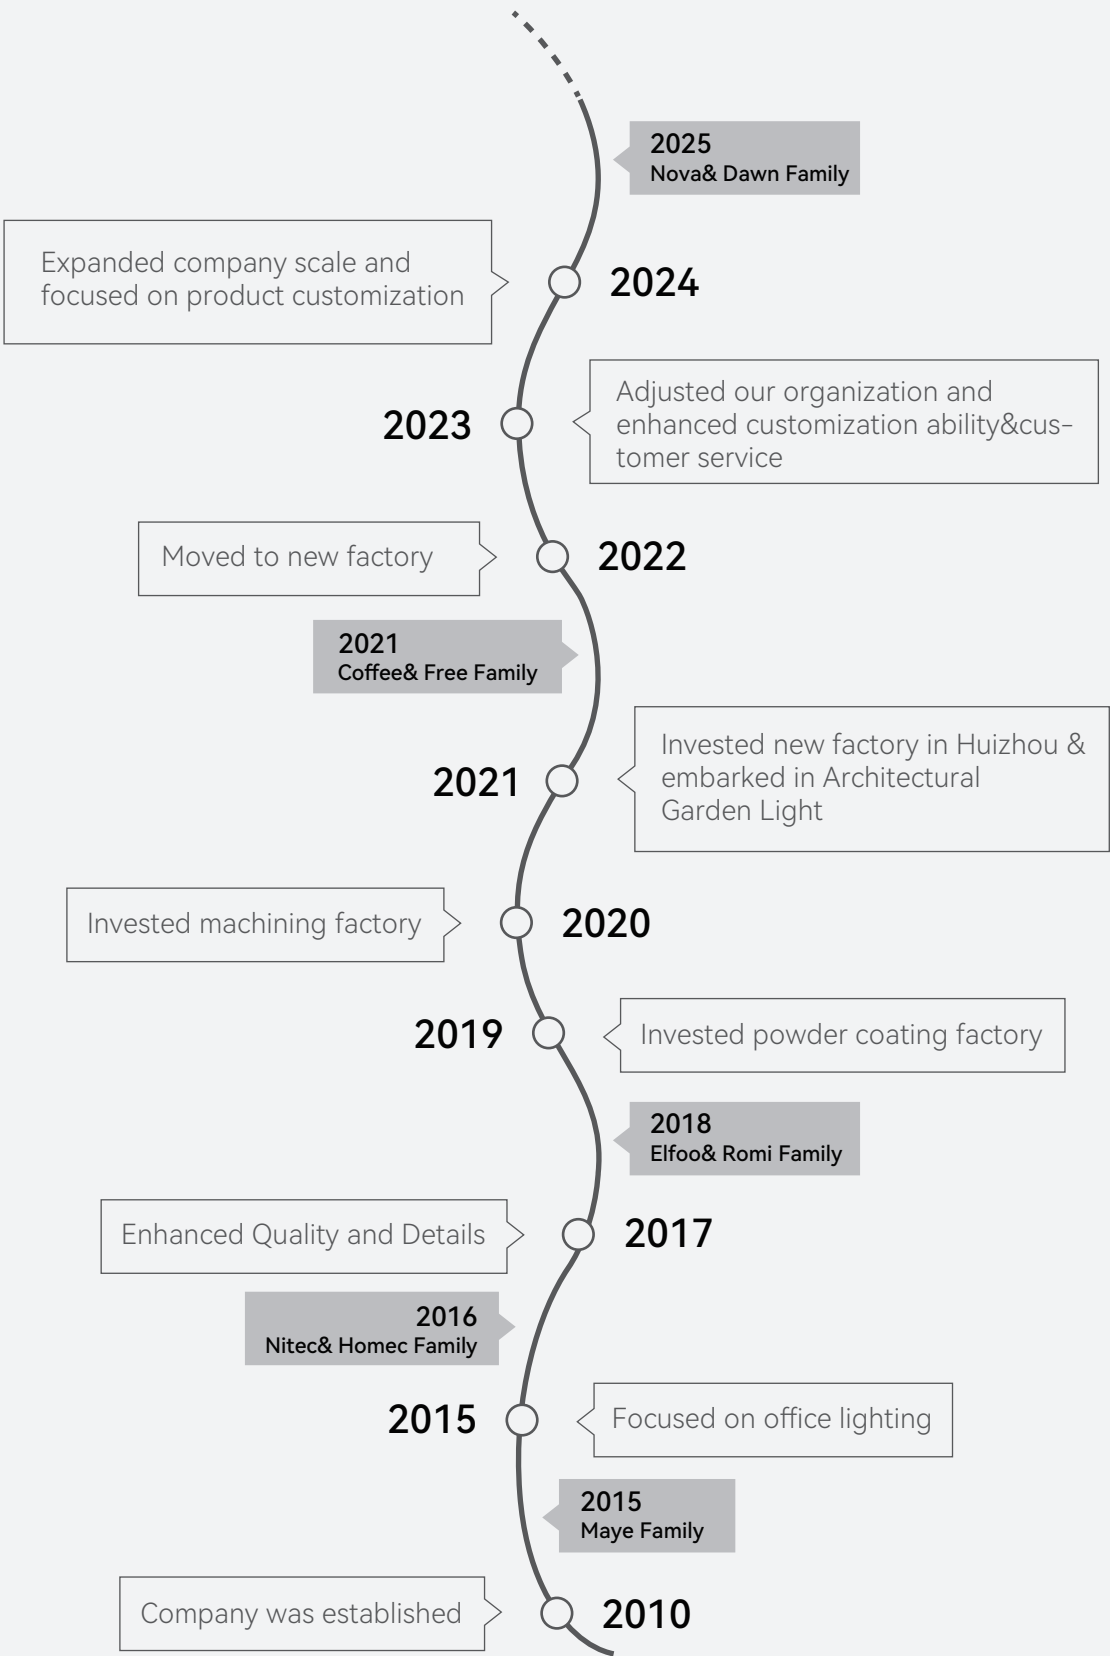

COMPANY PROFILE

NEXOL lighting established in 2010, has production bases and offices in Huizhou, Shenzhen, and Dongguan. The company currently has 230 employees, and its factory buildings cover a total area of 14,500 square meters, obtained ISO9001, ISO14001, and ISO45001 certifications.

The name of NEXOL comes from “New Experience of Lighting”, aims to offer a new concept of lighting with well thought intelligent & healthy lighting having the environment in mind and provide a high-quality lighting to create a positive atmosphere, adhering to a business strategy focused on customer centric, product leadership, quality assurance, outstanding details, and customization support.



What We Do

We focus on professional lighting products, from designing, manufacturing, quality control to marketing, offer one-stop solutions for office lighting and architecture garden lighting, and committed to provide our international clients with OEM & ODM business service. Currently our main markets are in Europe like Germany, Switzerland, Austria, and Middle East, Southeast Asia, and other markets.

Why Choose Us

NEXOL brand can be identified by our unique design, function and quality, differentiated from others on product design and after sales service and support.

We deeply appreciate the continued support of our existing clients and are excited to welcome new partners to our growing family. Our goal is to continue meeting market demands, providing stable, high-quality products, and ensuring a satisfying return on investment for all our customers.

CULTURE



Mission

Bring new lighting experience to end-users with healthy, comfortable, intelligent and eco-friendly lighting.

Provide customers with leading and innovative office & architecture garden luminaires and lighting solutions .



Vision

To be the global leading player in specific office lighting and architecture lighting field

Let the company's strivers live a decent life

To be the long lasting player who can run healthy



Values

Simplicity

Perfection

Openness

Progression



Business Strategies

Customer Centric

Product Leadership

Quality Assurance

Outstanding Details

Customization Support

FACTORY CAPABILITY

R&D CAPABILITY



R&D Investment

Invest >7% of the turnover for R&D every year.



ODM service

Provide professional & efficient customization support



New product

Launch 20+ new office lighting products every year.
Launch 10+ new architecture garden lighting products every year.



Patents

Own more than 80 patents.

LABORATORY




EFFICIENT PRODUCTION BASE

9,000 m² of Modern Factory; 130+ Workers;
15 luminaire production lines



ORIGINAL DESIGN

More than 90 patents

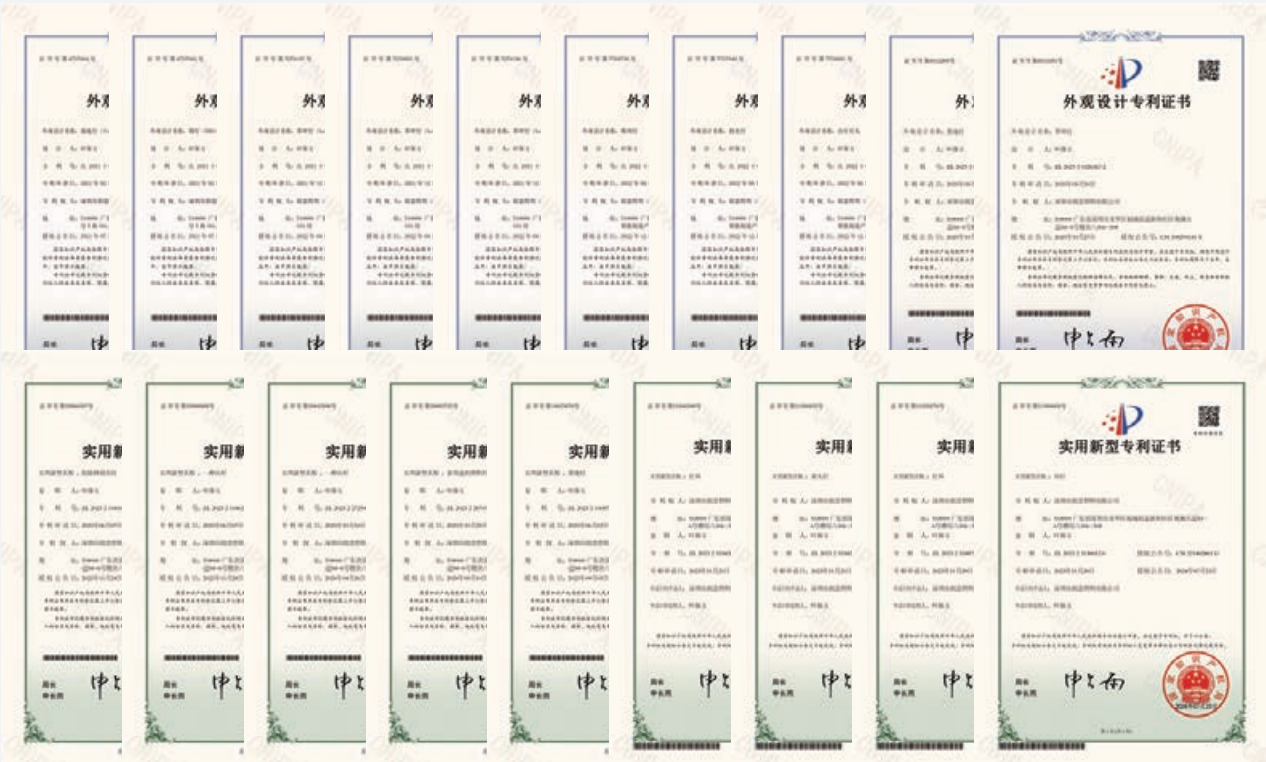

CERTIFICATES

Nexol has ISO Certificates:
ISO9001:2015
ISO14001
ISO45001

We collaborate with qualified third-party testing Lab only (TUV, WALTEK, NTEK, CTI, LCS)

Products certifications (TUV ENEC, TUV GS, ERP, CE, ROHS)



MARKETING ACTIVITIES

Guangzhou International Lighting Exhibition, Hong Kong International Lighting Exhibition (Autumn Edition), Light+ Building Messe Frankfurt, Light+ Intelligent Building Middle East Dubai, Brazil EXPOLUX Lighting Fair...


NEXOL Lighting has been invited to participate in many large-scale exhibitions in lighting industry domestically and abroad. Stunning appearance with professional lighting product line and scenario-based booth design has been made in involved fairs, which vividly interpretes the new experience of healthy, comfortable, intelligent and environmentally friendly lighting. Various on-site visitors, industry professionals and media are attracted to stop by to visit and report.



SHOWROOM


Combining product functionality with application of aesthetics, NEXOL has created a large-scale, immersive lighting display and experience space in Huizhou that covers all scenarios.

With 1:1 restoration of product usage in multiple different styles, such as offices, courtyards, and residences, delivers a wonderful experience of what you see is what you get and what you get is what you feel.

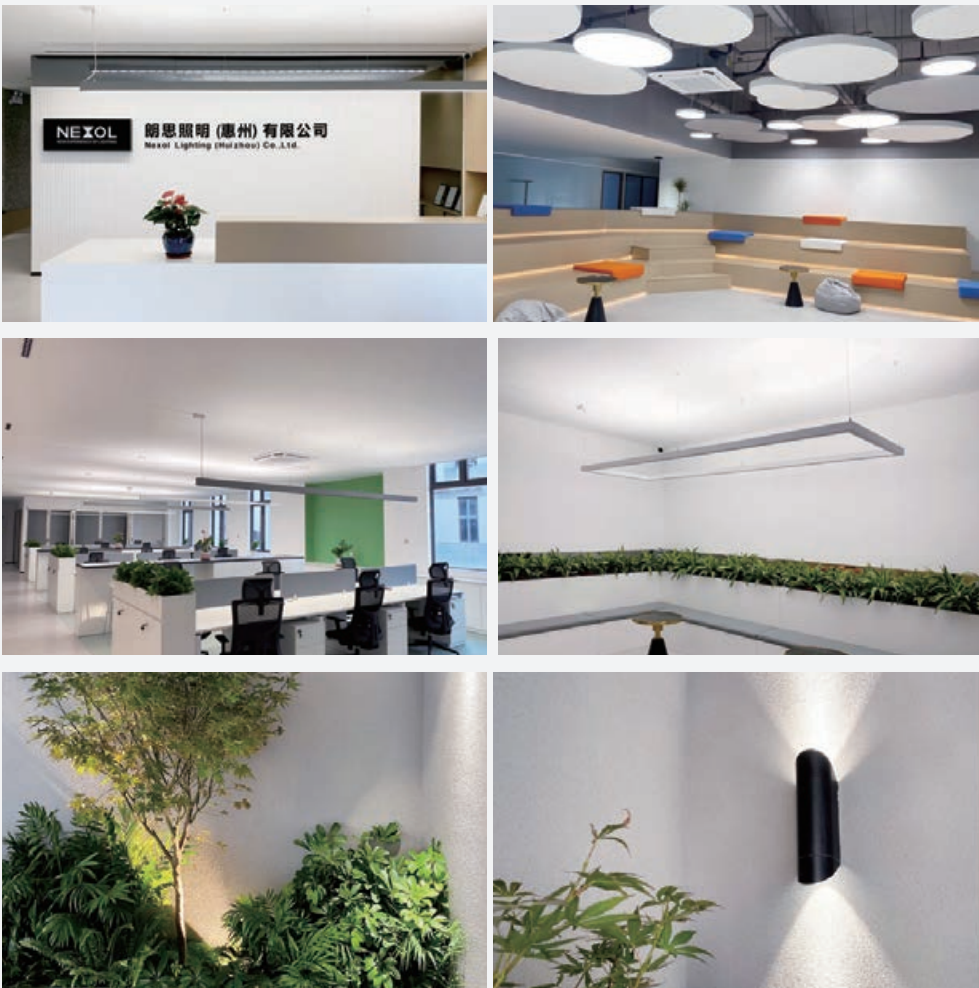


PRODUCT CODE

SPECIFIC OFFICE LIGHTING

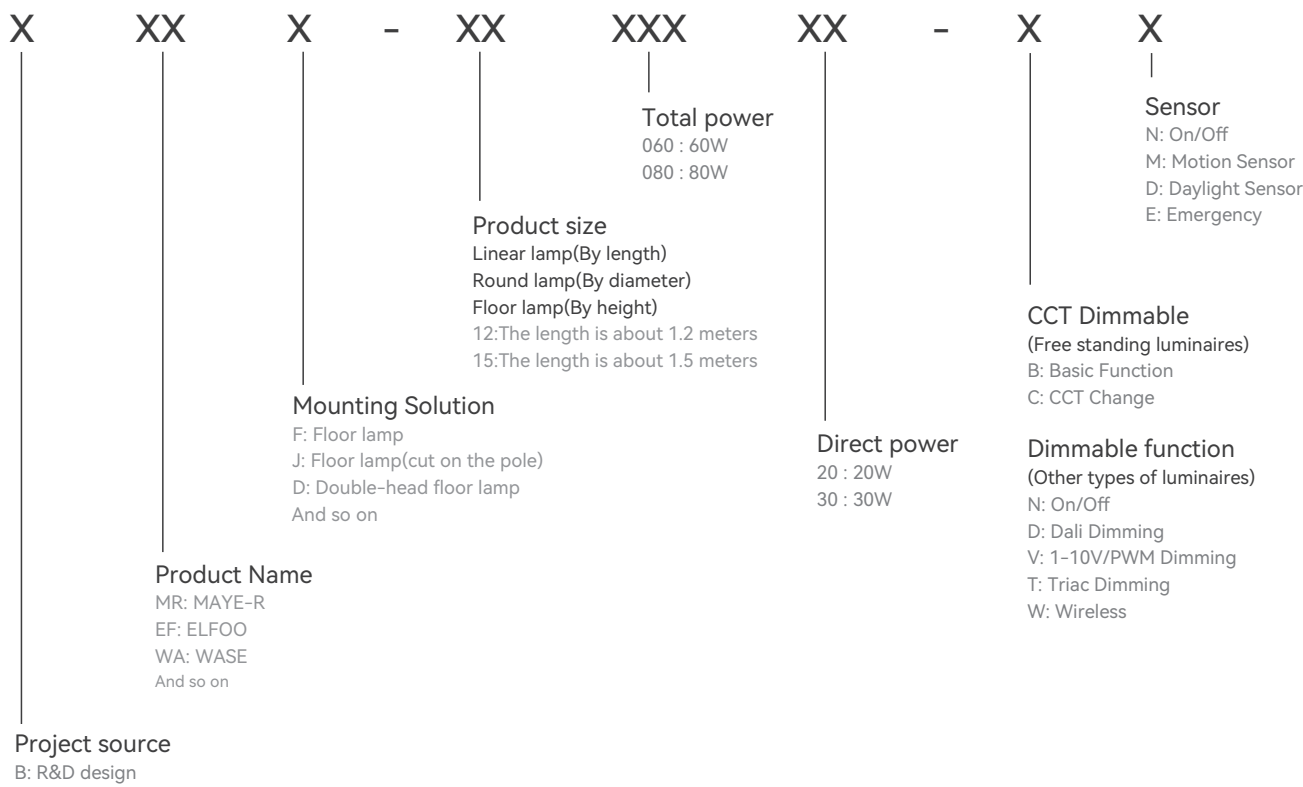

ARCHITECTURE GARDEN LIGHTING

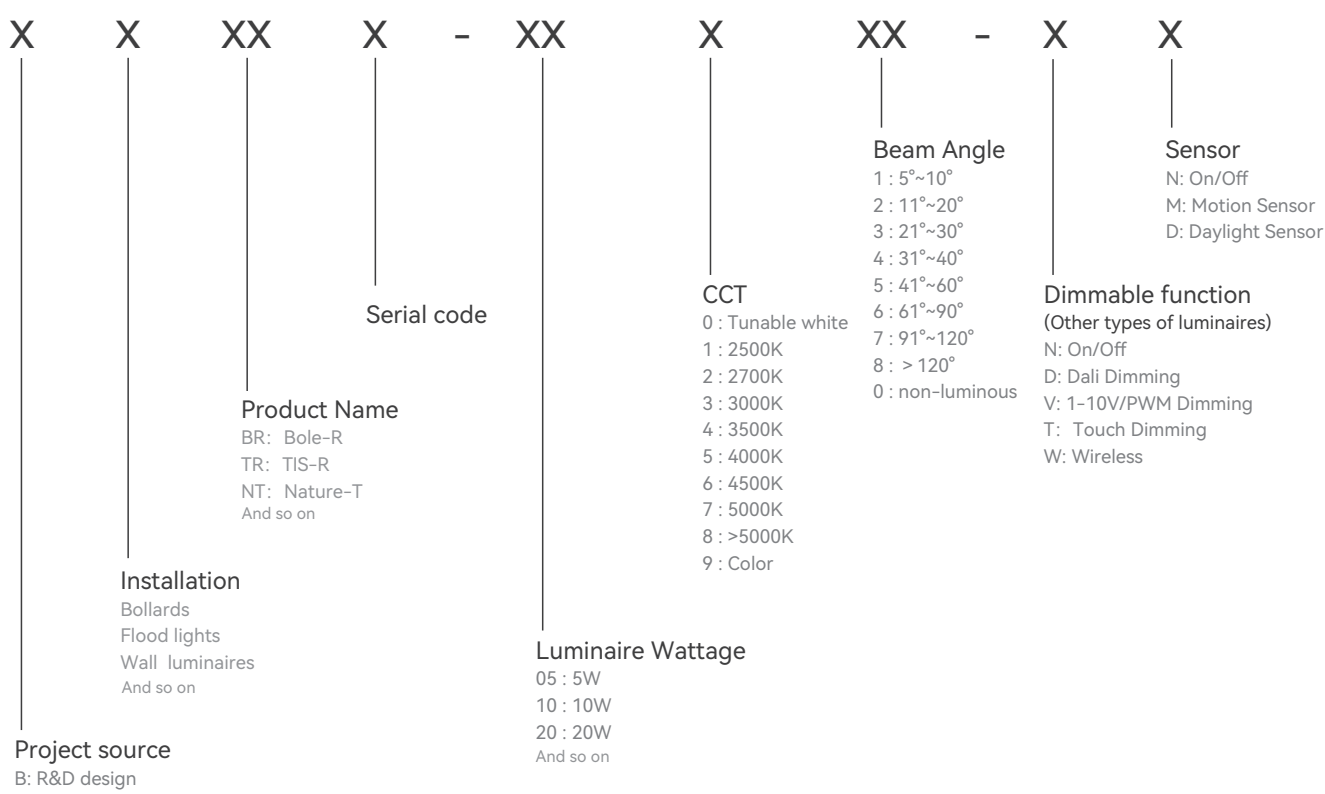

CONTENTS

01

SPECIFIC OFFICE LIGHTING

17

FREE STANDING LUMINAIRES

19

DESK FIXED LUMINAIRES

85

PENDANT LUMINAIRES

103

SURFACE MOUNTED LUMINAIRES

135

RECESSED LUMINAIRES

153

WALL MOUNTED LUMINAIRES

173

02

ARCHITECTURE GARDEN LIGHTING

183

BOLLARDS

185

FLOODLIGHTS

207

WALL LUMINAIRES

215

CEILING LUMINAIRES

231

WALL RECESSED LUMINAIRES

237

TABLE LAMPS

245

SPECIFIC OFFICE LIGHTING

01 FREE STANDING LUMINAIRES

NEW



Dawn-F 29

NEW



Dawn-D 31

NEW



NOVA-F1 33

NEW



NOVA-D1 35

NEW



NEAT-F 37

NEW




POLA 39

NEW



BOOK-F 41

NEW



FIT-F 43

NEW



ROMAN-F0 45

NEW



ROMAN-F1 47

NEW



ROMAN-F2 49

NEW



ROMAN-D1 51

NEW



FREE-F 53

NEW



FREE-D1 55

NEW




FREE-D2 57

NEW



ROMI-F 59



COFFEE-R 61



OFA 63

NEW



ELFOO-F 2.0 65

NEW



ELFOO-D 67

NEW



LENO-F 2.0 69

NEW



MAYE-FR 2.0 71

NEW



MAYE-FS 2.0 73



HOMEC 3.0 75



HOME0 3.0 77



NITEC 3.0 79



NITED 81



NITEO 3.0 83

02 DESK FIXED LUMINAIRES

NEW




FIT-T 89

NEW




MAYE-TR 2.0 91

NEW




MAYE-TS 2.0 93

NEW




HOMET 3.0 95

NEW




NITET 3.0 97

NEW



ELFOO-T 2.0 99

NEW



LENO-T 2.0 101

03 PENDANT LUMINAIRES

NEW



Dawn-P0 109

NEW



Dawn-P1 111

NEW



Equo-P 113

NEW



MAYE Pro-PS 115

NEW



ROMAN-P0 117

NEW




ROMAN-P1 119

NEW



EZY-P 121



KEY-P 123



FREE-P 125




ROMI-P 127



ELFOO-P 129



LENO-P2 131



LICON-P 133

04 SURFACE MOUNTED LUMINAIRES

NEW



EZY-C 139



KEY-C 141



FREE-C 143



ROMI-C 145



ELFOO-C 147



ELFOO-C3 149



LICON-C 151

05 RECESSED LUMINAIRES



EZY-R 157



KEY-R 159



ELFOO-R0 161



ELFOO-R1 163



ELFOO-D2 165



ELFOO-D3 167



ELFOO-D4 169



ELFOO-D5 171

06 WALL MOUNTED LUMINAIRES

NEW



MAYE-WS 2.0 177

NEW



POD 179



NEWA 181

ARCHITECTURE GARDEN LIGHTING

01 BOLLARDS

NEW



SHOW-L 189

NEW



PEGO 191

NEW



BUTTON-L 193

NEW



BOLE-M 195



BOLE-R 197



BOLE-S 201



BOLE-U 205

02 FLOODLIGHTS



CICA-X 211



CICA-M 211



CICA-S 213



CICA-T 213

03 WALL LUMINAIRES

NEW



PEGO 219

NEW



LUNA 221

NEW



CUBE 223



TIE-R 225



TIE-S 227




NATURE-W 229

04 CEILING LUMINAIRES



HALO-1 235



HALO-0 235

05 WALL RECESSED LUMINAIRES



SAFE-S 241



SAFE-O 243

06 TABLE LAMPS

NEW



PUDDING 249



NATURE-T 251



SPECIFIC OFFICE LIGHTING

01.

FREE STANDING LUMINAIRES	19
DESK FIXED LUMINAIRES	85
PENDANT LUMINAIRES	103
SURFACE MOUNTED LUMINAIRES	135
RECESSED LUMINAIRES	153
WALL MOUNTED LUMINAIRES	173

01

FREE STANDING LUMINAIRES

APPLICATIONS:
Open-plan office, individual office, etc.



FREE STANDING LUMINAIRES



Dawn-F



Dawn-D



Nova-F1



Nova-D1



NEAT-F



POLA



Book-F

Luminaire Wattage	80W/ 100W	160W/ 200W	80W/ 100W/ 90W (Casambi)	160W/ 200W	60W	80W/ 100W	60W
Luminous Flux	12000lm/ 15000lm	24000lm/ 29000lm	11200lm/ 14000lm/ 11200lm	23200lm/ 29000lm	7500lm	11200lm/ 14500lm	7800lm
UGR	<13	<13	<14	<12	<18	<15	C0 <17
optics	↑ 155° / 70° ↓	↑ 155° / 70° ↓	Asymmetric optics	Asymmetric optics	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 100° / 82° ↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor/ Casambi	Daylight sensor & Motion sensor	NO	Daylight sensor & Motion sensor	Motion sensor
Colours							

FREE STANDING LUMINAIRES



FIT-F

ROMAN-F0

ROMAN-F1

ROMAN-F2

ROMAN-D1

FREE-F

FREE-D1

Luminaire Wattage	60W	60W/ 80W/ 100W	80W	80W	150W	80W/ 100W	150W
Luminous Flux	5530lm	9000lm/ 12000lm/ 15000lm	11800lm	12000lm	20200lm	10400lm/ 13300lm	19800lm
UGR	<18	<6	<11	<11	<16	<14	<16
optics	↑ 100°/70° ↓	↑ 115° / 60° ↓	↑ 115° / 60° ↓	↑ 115° / 60° ↓	↑ 115° / 60° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming
Sensor	Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor/ Casambi	Daylight sensor & Motion sensor
Colours							

FREE STANDING LUMINAIRES



FREE-D2



ROMI-F



COFFEE-R



OFA



ELFOO-F 2.0



ELFOO-D 2.0



LENO-F 2.0

Luminaire Wattage	150W	80W	45W		100W	80W	150W	80W
Luminous Flux	19800lm	9645lm	6400lm		12000lm	10800lm	19500lm	11600lm
UGR	<16	<16	<10		<14	<12	<12	<6
optics	↑ 115° / 80° ↓	↑ 115° / 90° ↓	↑ 115°		↑ 140° / 85° ↓	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓	↑ 115° / 50° ↓
CRI	>80	>80	>80		>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white		3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming		Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor & Motion sensor	NO	NO		Daylight sensor/ Motion sensor	Daylight sensor/ Motion sensor Casambi	Daylight sensor & Motion sensor	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor
Colours								

FREE STANDING LUMINAIRES



MAYE-FR 2.0



MAYE-FS 2.0



HOMEc 3.0



HOMEo 3.0



NITEc 3.0



NITED



NITEc 3.0

Luminaire Wattage	80W/ 100W	80W/ 100W	60W/ 80W	60W/ 80W	60W/ 80W	160W	60W/ 80W
Luminous Flux	11200lm/ 11516lm/ 15000lm	11200lm/ 11516lm/ 15000lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	19200lm	7730lm/ 10800lm/ 11600lm
UGR	<18/ <14/ <13	<18/ <14/ <13	<16/ <19/ <11	<16/ <19/ <11	<16/ <19/ <11	<17	<16/ <19/ <11
optics	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Knob dimming	Knob dimming	Knob dimming	Knob dimming
Sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor
Colours							



Dawn-F

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<13 UGR

Dimmable

Tunable White

HCL system

CAS A+ MBI

SW2.1™

CE

RoHS

Anti glare lens solution with side micro-light, low glare and high visual comfort

155° wide beam angle lens for indirect light

4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;

PRODUCT PARAMETERS


Luminaire Wattage	80W	100W
Luminous Flux	12000lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Beam Angle	↑ 155° / 70° ↓	
UGR	<13	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	CCT
BDAF-2008020-BD	↑ 9200lm/2800lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BDAF-2008020-CD	↑ 8400lm/2400lm ↓	↑ 60W/20W ↓	3000~5700K
BDAF-2010020-BD	↑ 12200lm/2800lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BDAF-2010020-CD	↑ 11200lm/2400lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

29

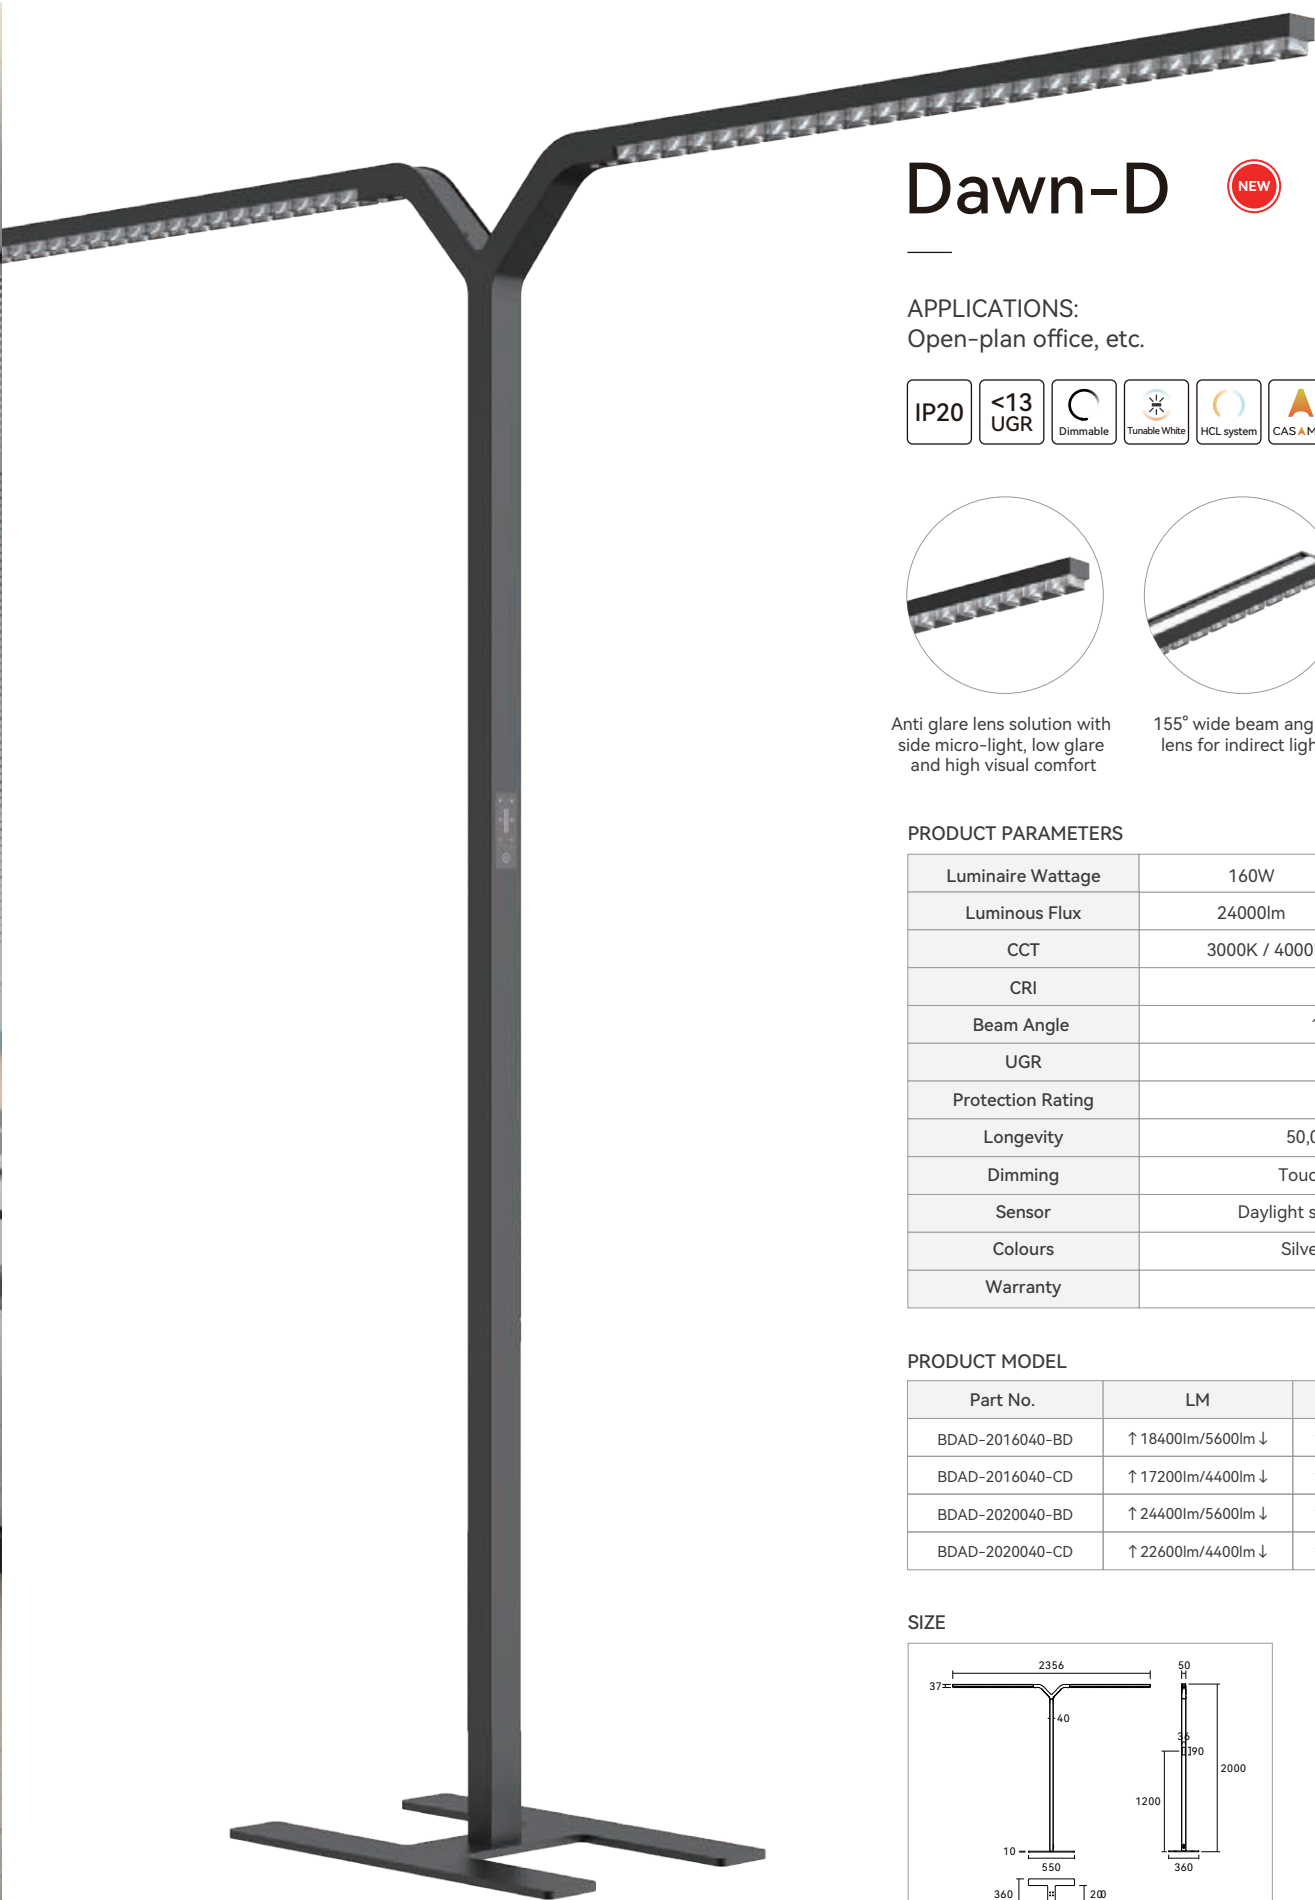

Dawn-D NEW

APPLICATIONS:
Open-plan office, etc.

IP20

<13 UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SMD

CE

RoHS



Anti glare lens solution with side micro-light, low glare and high visual comfort



155° wide beam angle lens for indirect light



4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;


PRODUCT PARAMETERS

Luminaire Wattage	160W	200W
Luminous Flux	24000lm	30000lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Beam Angle	↑ 155° / 70° ↓	
UGR	<13	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	CCT
BDAD-2016040-BD	↑ 18400lm/5600lm ↓	↑ 120W/40W ↓	3000/4000/6000K
BDAD-2016040-CD	↑ 17200lm/4400lm ↓	↑ 120W/40W ↓	3000~5700K
BDAD-2020040-BD	↑ 24400lm/5600lm ↓	↑ 160W/40W ↓	3000/4000/6000K
BDAD-2020040-CD	↑ 22600lm/4400lm ↓	↑ 160W/40W ↓	3000~5700K

SIZE

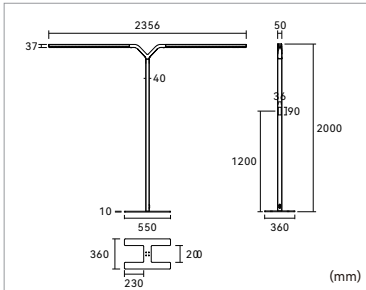



Casambi smart module
enables app control
with Swarm, HCL

NOVA-F1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<14
UGR

Dimmable

Tunable White

HCL system

CASAMBI

SWARM

CE


RoHS



Asymmetric optics
Desktop uniformity
U0 >0.75



Integrated die-cast and 23mm
ultra-thin lamp head, good
heat dissipation performance



Daylight sensor &
Presence sensor


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W	90W (Casambi)
Luminous Flux	11200lm	14000lm	11200lm
CCT	3000K / 4000K / 6000K / Tunable white		
CRI	>80		
Optic	Asymmetric optics		
UGR	<14		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor & Motion sensor/Presence sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BNOF1-2008012-BD	↑ 9580lm/1620lm ↓	↑ 68W/12W ↓	3000/4000/6000K
BNOF1-2008012-CD	↑ 8900lm/1500lm ↓	↑ 68W/12W ↓	3000~5700K
BNOF1-2010012-BD	↑ 12380lm/1620lm ↓	↑ 88W/12W ↓	3000/4000/6000K
BNOF1-2010012-CD	↑ 11500lm/1500lm ↓	↑ 88W/12W ↓	3000~5700K
BNOF1-2009012-CC	↑ 9828lm/1372lm ↓	↑ 78W/12W ↓	3000~5700K

SIZE

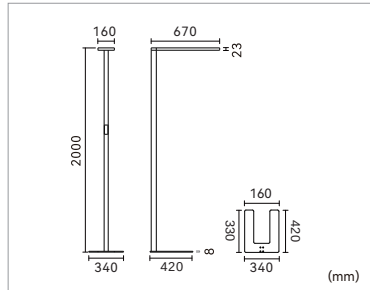

LIGHT DISTRIBUTION



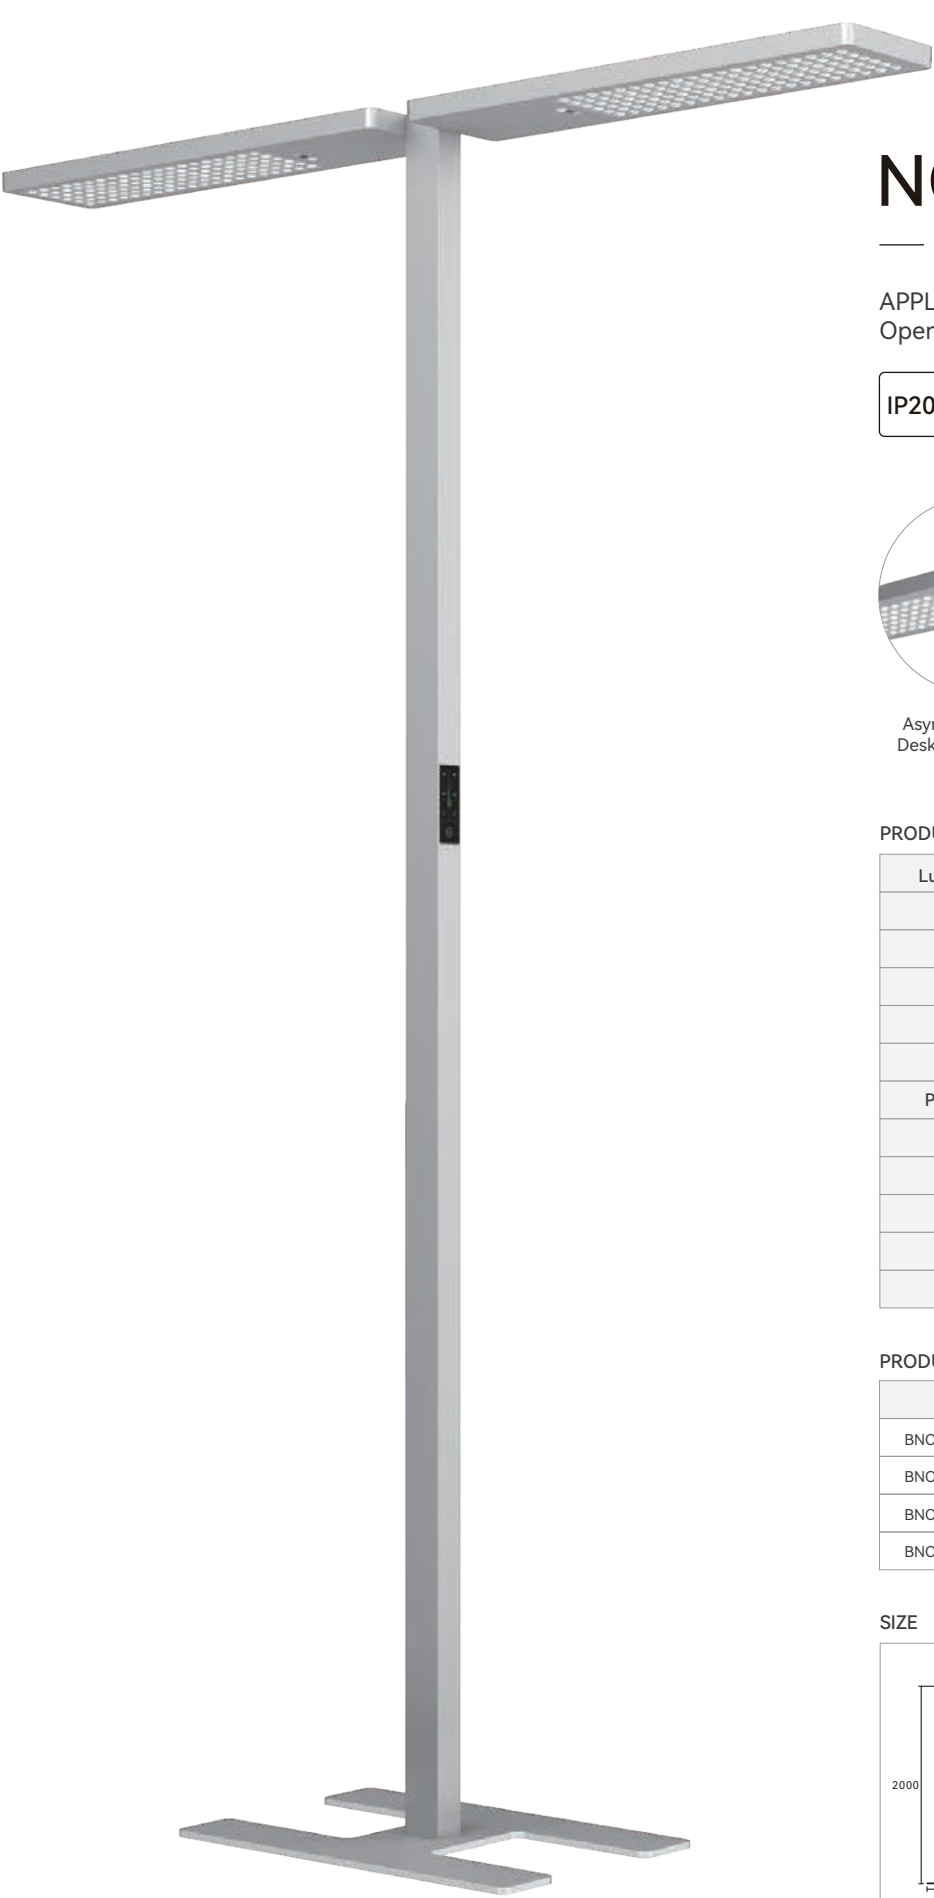

NOVA-D1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.



Asymmetric optics
Desktop uniformity
U0 >0.6



Integrated die-cast and 23mm
ultra-thin lamp head, good
heat dissipation performance



Daylight sensor &
Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	160W	200W
Luminous Flux	23200lm	29000lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Optic	Asymmetric optics	
UGR	<12	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor & Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BNOD1-2016024-BD	↑ 20300lm/2900lm ↓	↑ 136W/24W ↓	3000/4000/6000K
BNOD1-2016024-CD	↑ 18900lm/2700lm ↓	↑ 136W/24W ↓	3000~5700K
BNOD1-2020024-BD	↑ 26100lm/2900lm ↓	↑ 176W/24W ↓	3000/4000/6000K
BNOD1-2020024-CD	↑ 24300lm/2700lm ↓	↑ 176W/24W ↓	3000~5700K

SIZE

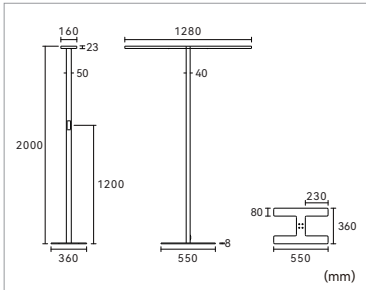

LIGHT DISTRIBUTION



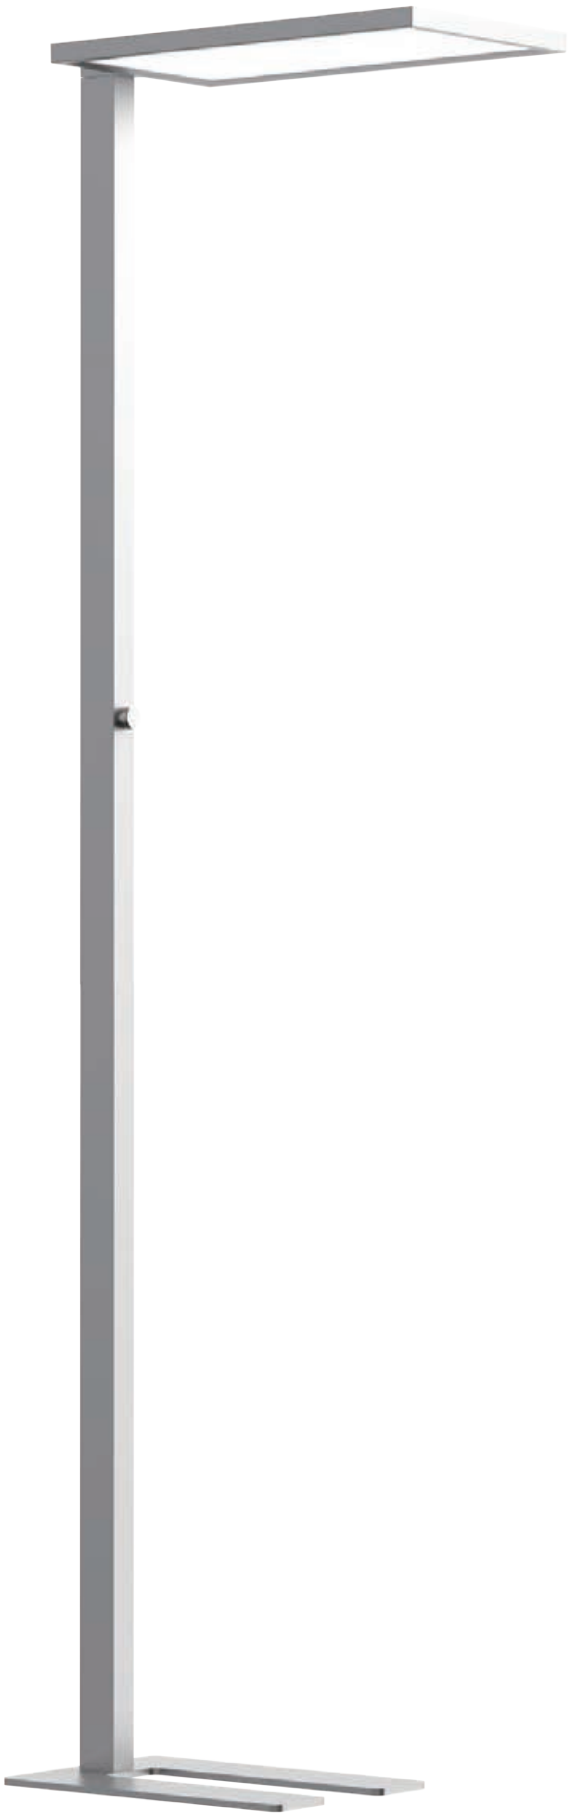

NEAT-F NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18
UGR

Dimmable







Integrated die-cast and 22mm ultra-thin lamp head



Competitive price



Microprismatic diffuser design with low glare


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7500lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	↑ 115° / 80° ↓
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	NO
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BNEJ-1906030-BN	↑ 4200lm/3300lm ↓	↑ 30W/30W ↓	3000/4000/6000K

SIZE

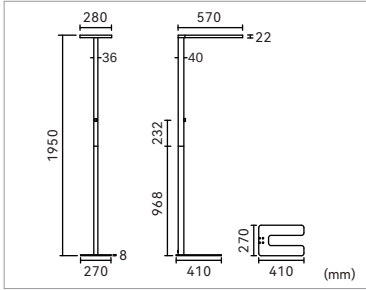

LIGHT DISTRIBUTION



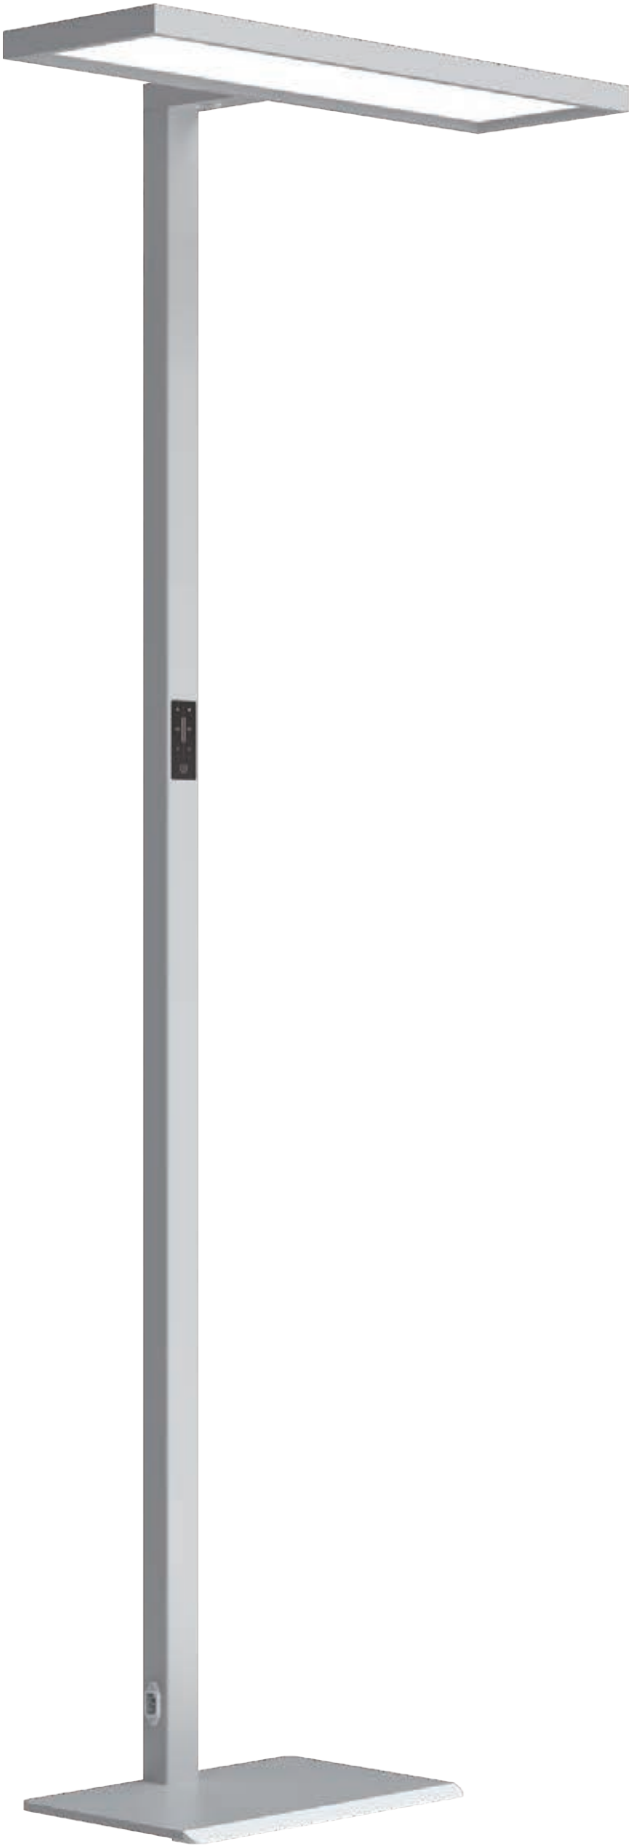

POLA NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<15 UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SULZ

CE

RoHS

Desktop light
uniformity U0> 0.6

Indirect lighting with tilted
asymmetric design for
visual comfort


Kick-resistant base design

Luminaire Wattage	80W	100W
Luminous Flux	11200lm	14500lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BPOF-1908024-BD-01	↑ 8400lm/2800lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BPOF-1908024-BN-01	↑ 8400lm/2800lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BPOF-1908024-CD-01	↑ 8000lm/2400lm ↓	↑ 56W/24W ↓	3000~5700K
BPOF-1908024-CN-01	↑ 8000lm/2400lm ↓	↑ 56W/24W ↓	3000~5700K
BPOF-1910020-BD-01	↑ 12000lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BPOF-1910020-BN-01	↑ 12000lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BPOF-1910020-CD-01	↑ 11100lm/2400lm ↓	↑ 80W/20W ↓	3000~5700K
BPOF-1910020-CN-01	↑ 11100lm/2400lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

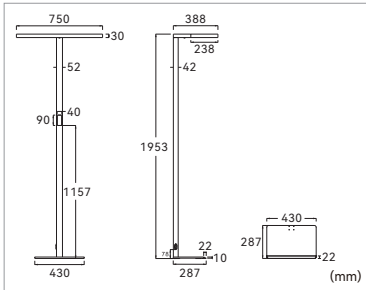


LIGHT DISTRIBUTION






BOOK-F NEW

APPLICATIONS:
Home office, study room, children's study area, etc.



Designed with large shielding angle



Light efficiency up to 130LM/W



Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7800lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	C0 <17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor
Colours	Silver / White / Black / Madeira brown / Blackberry leaf green / Hermosa pink / Spruce blue
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BBKJ-1806020-BN-01	↑ 6000lm/1800lm ↓	↑ 40W/20W ↓	3000/4000/6000K
BBKJ-1806020-BM-01	↑ 6000lm/1800lm ↓	↑ 40W/20W ↓	3000/4000/6000K

SIZE

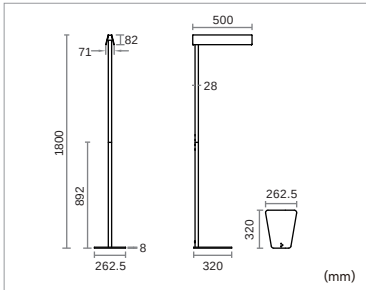

LIGHT DISTRIBUTION



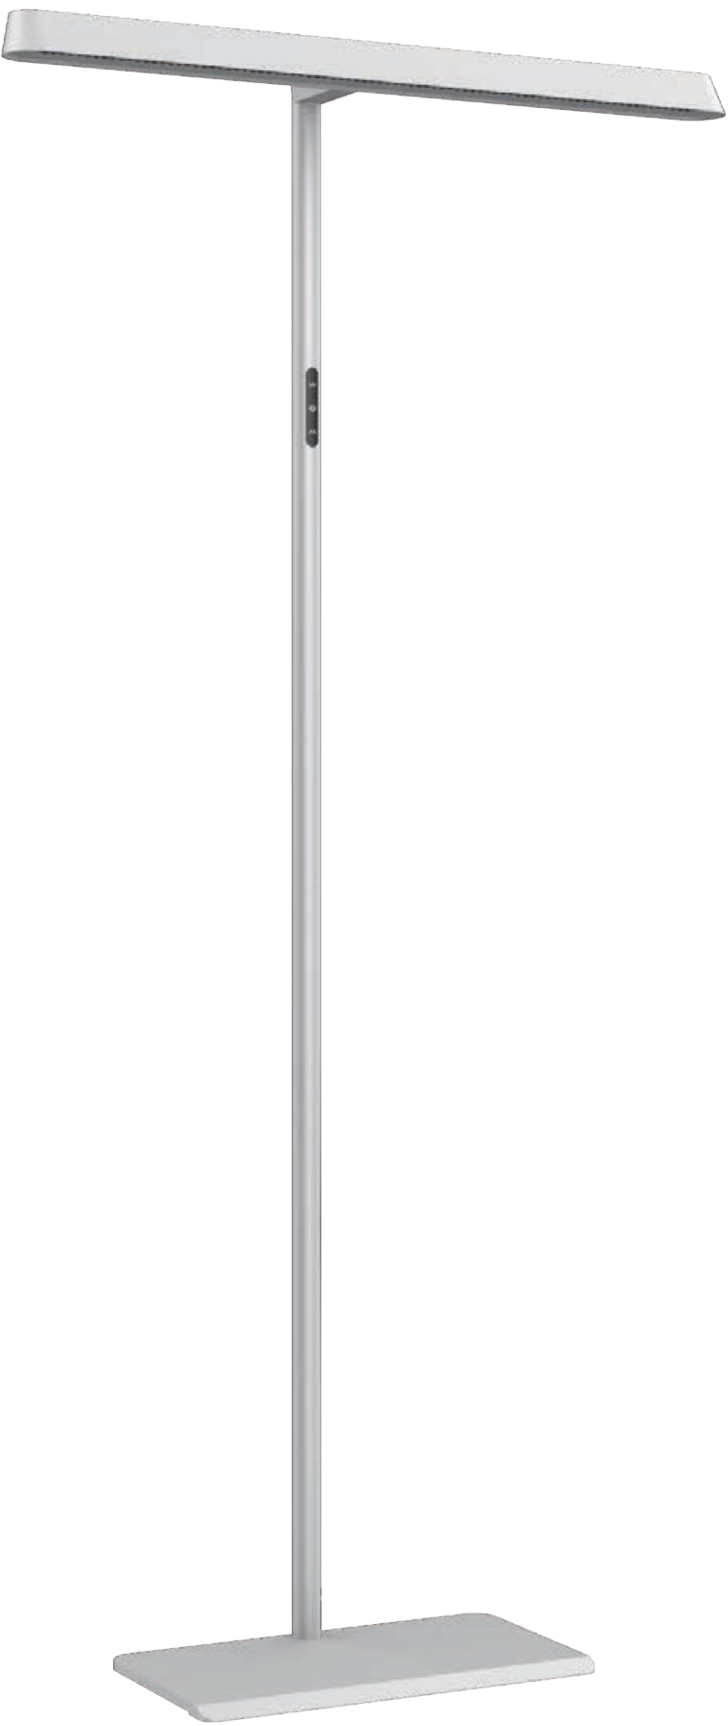

FIT-F

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18
UGR

Dimmable

CE

REMS



Direct and indirect light,
with full-reflective polarized
optic solution,
UGR<18 anti-glare design;



78cm lamp head design,
delivers superior workplane
illuminance uniformity;




Independent touch panel
dimming control
for direct and indirect light,
smooth and comfortable;

Luminaire Wattage	60W	
Luminous Flux	5530lm	
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	NO	Motion sensor
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFAJ-1606030-BN-02	↑ 4050lm/1480lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BFAJ-1606030-BM-02	↑ 4050lm/1480lm ↓	↑ 30W/30W ↓	3000/4000/6000K

SIZE

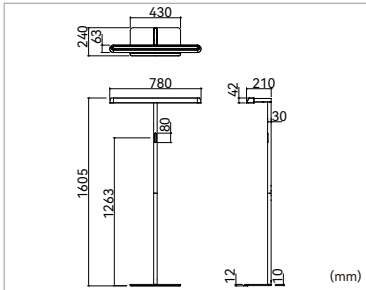

LIGHT DISTRIBUTION





ROMAN-F0 NEW


APPLICATIONS:
Open-plan office, individual office, etc.



Large angle cut-off,
effective control of light
glare Anti-glare modules



Touch panel dimming



Support smart
control function


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	100W
Luminous Flux	9000lm	12000lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
CRI	>80		
Beam Angle	↑ 115° / 60° ↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BROF0-1906018-BN	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1906018-BM	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1906018-BD	↑ 6840lm/2160lm ↓	↑ 42W/18W ↓	3000/4000/6000K
BROF0-1908016-BN	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-BM	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-BD	↑ 10080lm/1920lm ↓	↑ 64W/16W ↓	3000/4000/6000K
BROF0-1908016-CD	↑ 8800lm/1600lm ↓	↑ 64W/16W ↓	3000~5700K
BROF0-1910015-BD	↑ 13200lm/1800lm ↓	↑ 85W/15W ↓	3000/4000/6000K
BROF0-1910015-CD	↑ 11500lm/1500lm ↓	↑ 85W/15W ↓	3000~5700K

SIZE

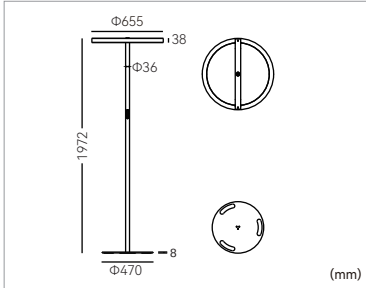

LIGHT DISTRIBUTION



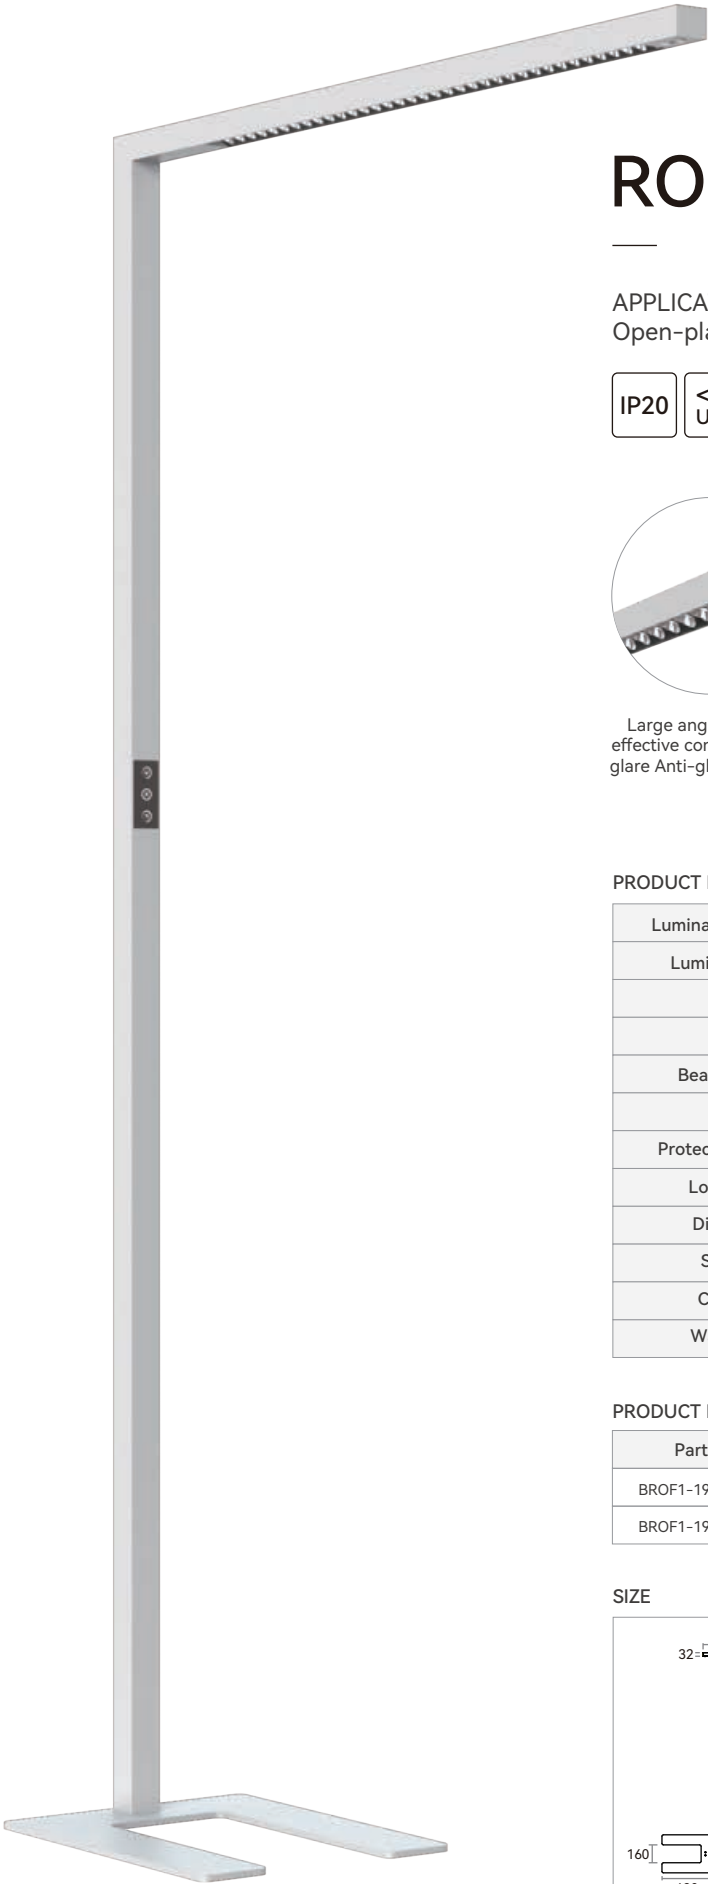

ROMAN-F1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<11
UGR

Dimmable

Tunable White

CE

RoHS



Large angle cut-off,
effective control of light
glare Anti-glare modules



Light efficiency
up to 148LM/W



Support smart
control function


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 60° ↓
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BROF1-1908020-BD	↑ 9350lm/2450lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BROF1-1908020-CD	↑ 8800lm/2000lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

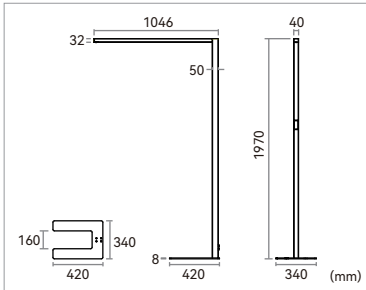

LIGHT DISTRIBUTION



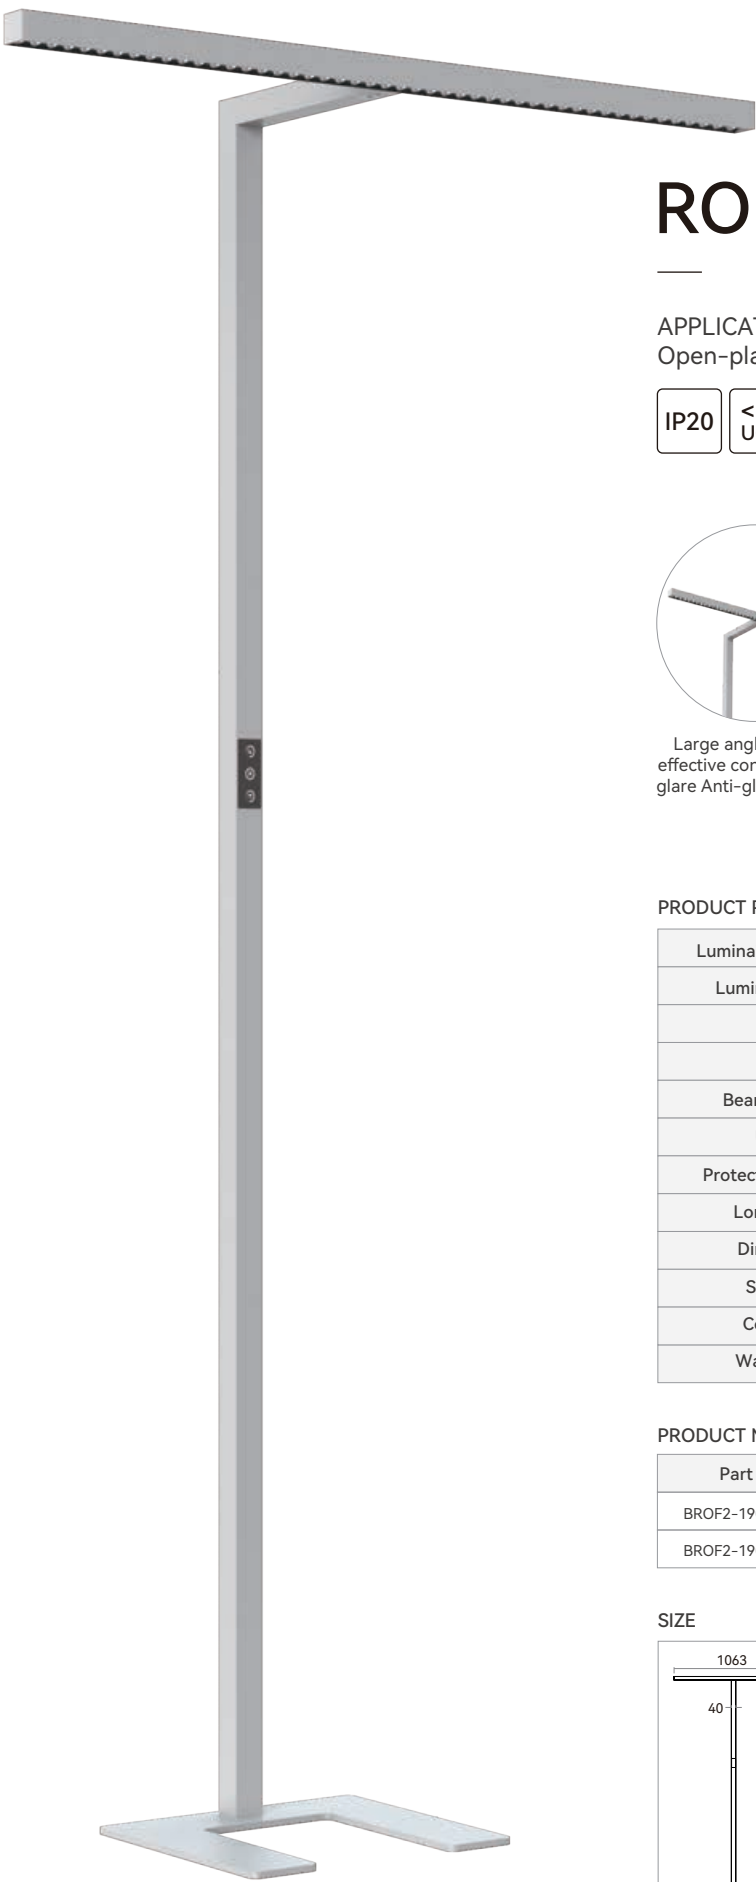

ROMAN-F2 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<11
UGR

Dimmable

Tunable White

Large angle cut-off,
effective control of light
glare Anti-glare modules

Light efficiency
up to 150LM/W

Support smart
control function


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	12000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 60° ↓
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BROF2-1908020-BD	↑ 9500lm/2500lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BROF2-1908020-CD	↑ 8800lm/2200lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

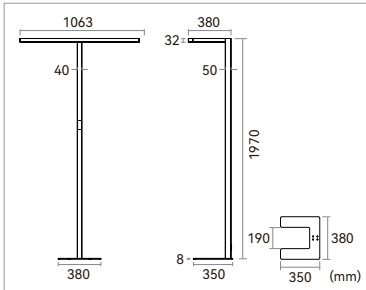

LIGHT DISTRIBUTION





ROMAN-D1

NEW

APPLICATIONS:
Open-plan office, etc.

IP20

<16
UGR

Dimmable

Tunable White

CE

RoHS

Patent design, simple design style, rich texture

Light efficiency up to 135LM/W

Support smart control function

PRODUCT PARAMETERS


Luminaire Wattage	150W
Luminous Flux	20200lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 60° ↓
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL

Part No.	LM	Power	CCT
BROD1-1915036-BD	↑ 16800lm/3400lm ↓	↑ 114W/36W ↓	3000/4000/6000K
BROD1-1915036-CD	↑ 15500lm/3250lm ↓	↑ 114W/36W ↓	3000~5700K

SIZE

LIGHT DISTRIBUTION

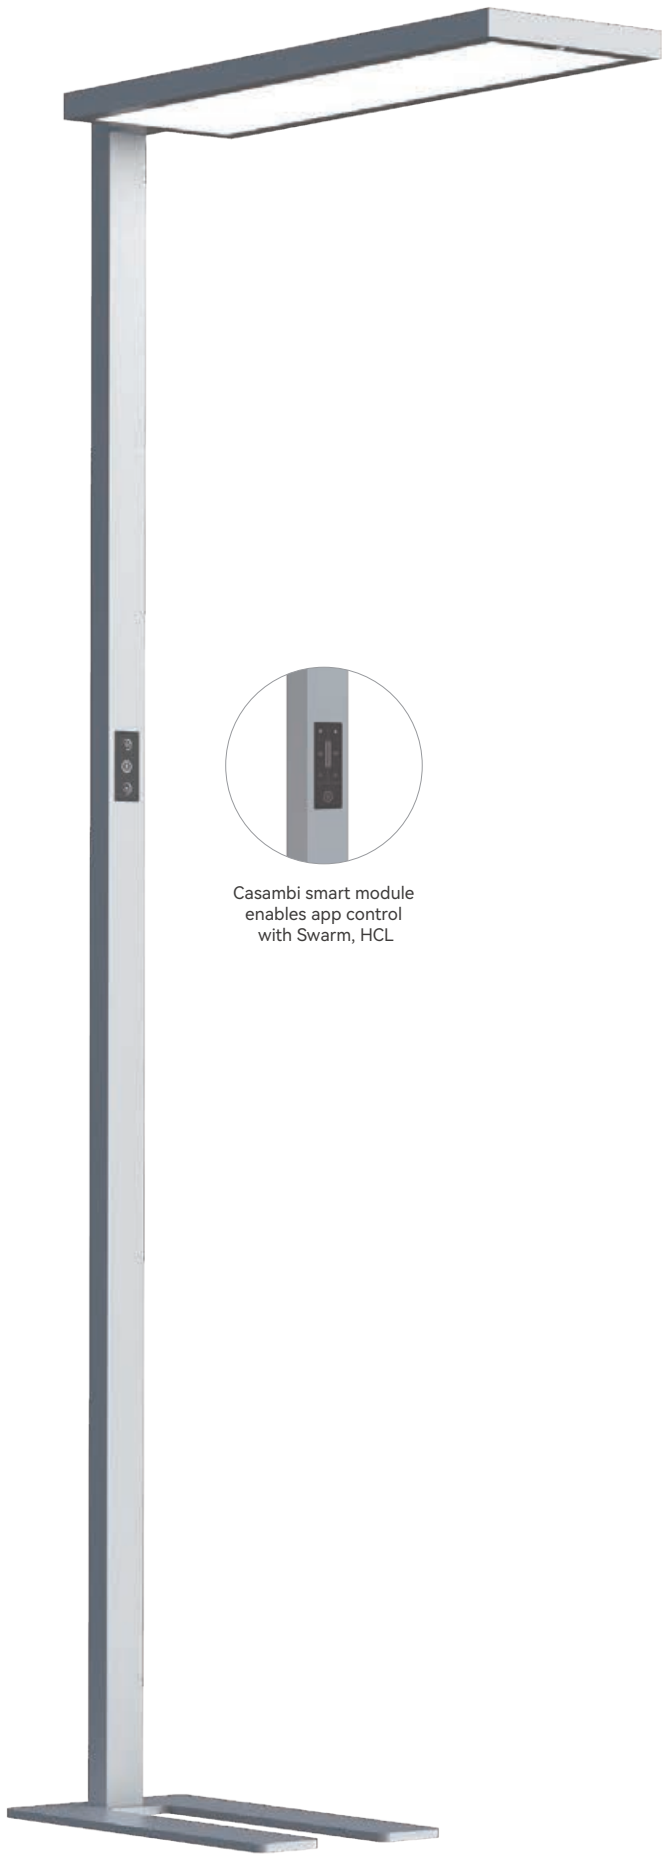

FREE-F NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<14
UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SWIRLTM

CE

RoHS

Patent design, simple design style, rich texture

Light efficiency up to 135LM/W

Casambi smart module enables app control with Swarm, HCL


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W
Luminous Flux	10400lm	13300lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFRF-1908024-BN	↑ 7280lm/3120lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BFRF-1908024-BD	↑ 7280lm/3120lm ↓	↑ 56W/24W ↓	3000/4000/6000K
BFRF-1910020-BN	↑ 10500lm/2800lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BFRF-1910020-BD	↑ 10500lm/2800lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BFRF-1910020-CD	↑ 10500lm/1900lm ↓	↑ 80W/20W ↓	3000~5700K
BFRF-1910020-CC	↑ 10500lm/1900lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

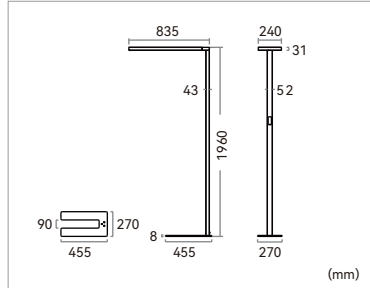

LIGHT DISTRIBUTION





FREE-D1

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<16
UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SWIRET

CE

RoHS



Patent design, simple design style, rich texture



Light efficiency up to 132LM/W



Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	150W	
Luminous Flux	19800lm	19000lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BFRD-2015045-BD-01	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-CD-01	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000~5700K

SIZE

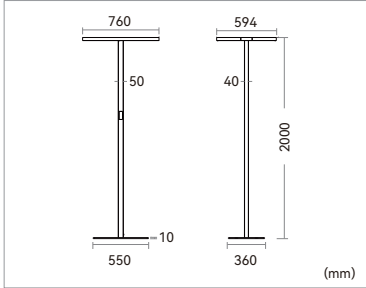

LIGHT DISTRIBUTION



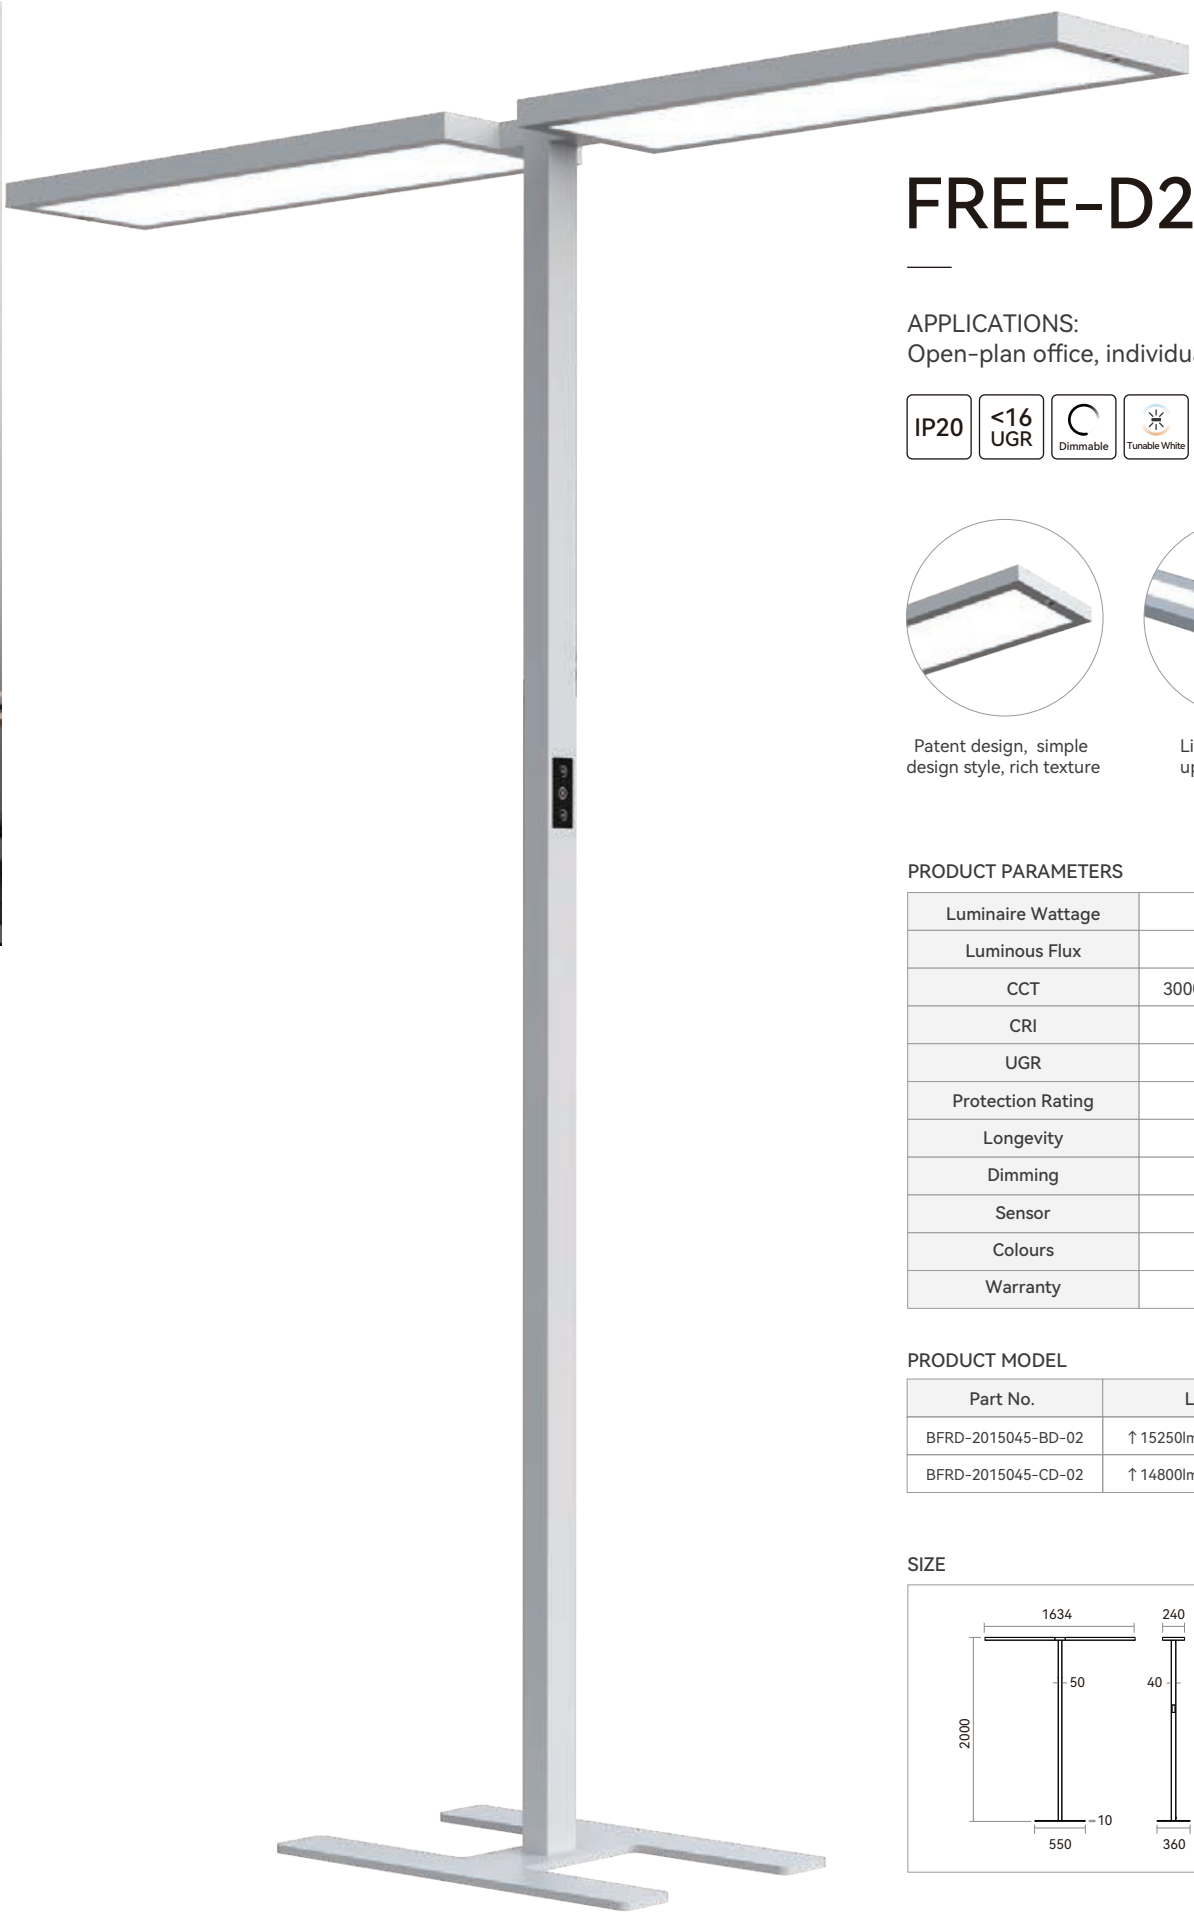

FREE-D2

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<16 UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SWIRL

CE

RoHS

Patent design, simple design style, rich texture

Light efficiency up to 132LM/W

Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	150W	
Luminous Flux	19800lm	19000lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFRD-2015045-BD-02	↑ 15250lm/4550lm ↓	↑ 105W/45W ↓	3000/4000/6000K
BFRD-2015045-CD-02	↑ 14800lm/4200lm ↓	↑ 105W/45W ↓	3000~5700K

SIZE

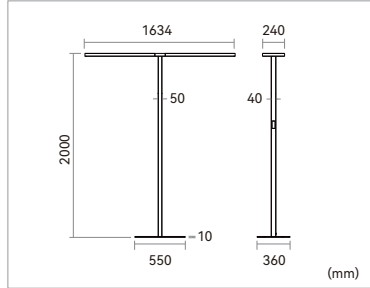

LIGHT DISTRIBUTION





ROMI-F

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<16
UGR

Dimmable

Tunable White

CE

RoHS

Microprism diffuser
UGR<16

Lumen efficiency
up to 120LM/W

Touch panel dimming


PRODUCT PARAMETERS

Luminaire Wattage	80W	
Luminous Flux	9645lm	9122lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BROF-1908040-BN	↑ 6105lm/3540lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BROF-1908040-CN	↑ 5750lm/3372lm ↓	↑ 40W/40W ↓	3000~5700K

SIZE

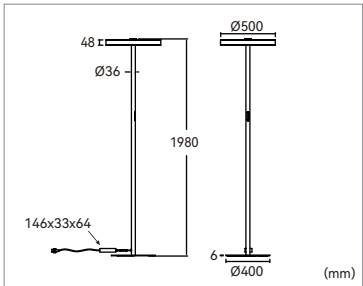


LIGHT DISTRIBUTION






COFFEE-R NEW

APPLICATIONS:
Negotiation rooms, small meeting rooms,
breakout areas and other office areas.
Living room, bedrooms and study rooms.



95% Indirect light,
lumen efficiency
up to 135LM/W



Convenient installation



Cut-Off Pole (Optional)


PRODUCT PARAMETERS

Luminaire Wattage	45W	
Luminous Flux	6400lm	5850lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming / Bluetooth dimming (TUYA)(optional)	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BCRJ-1904500-BN-03	↑ 6400lm	↑ 45W	3000/4000/6000K
BCRJ-1904500-CN-03	↑ 5850lm	↑ 45W	3000~5700K
BCRJ-1904500-WN-03	↑ 6400lm	↑ 45W	3000/4000/6000K

SIZE

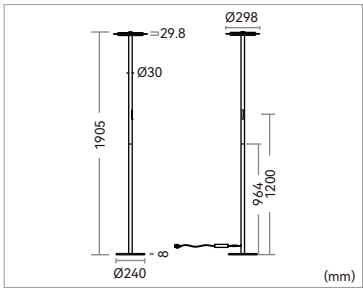

LIGHT DISTRIBUTION



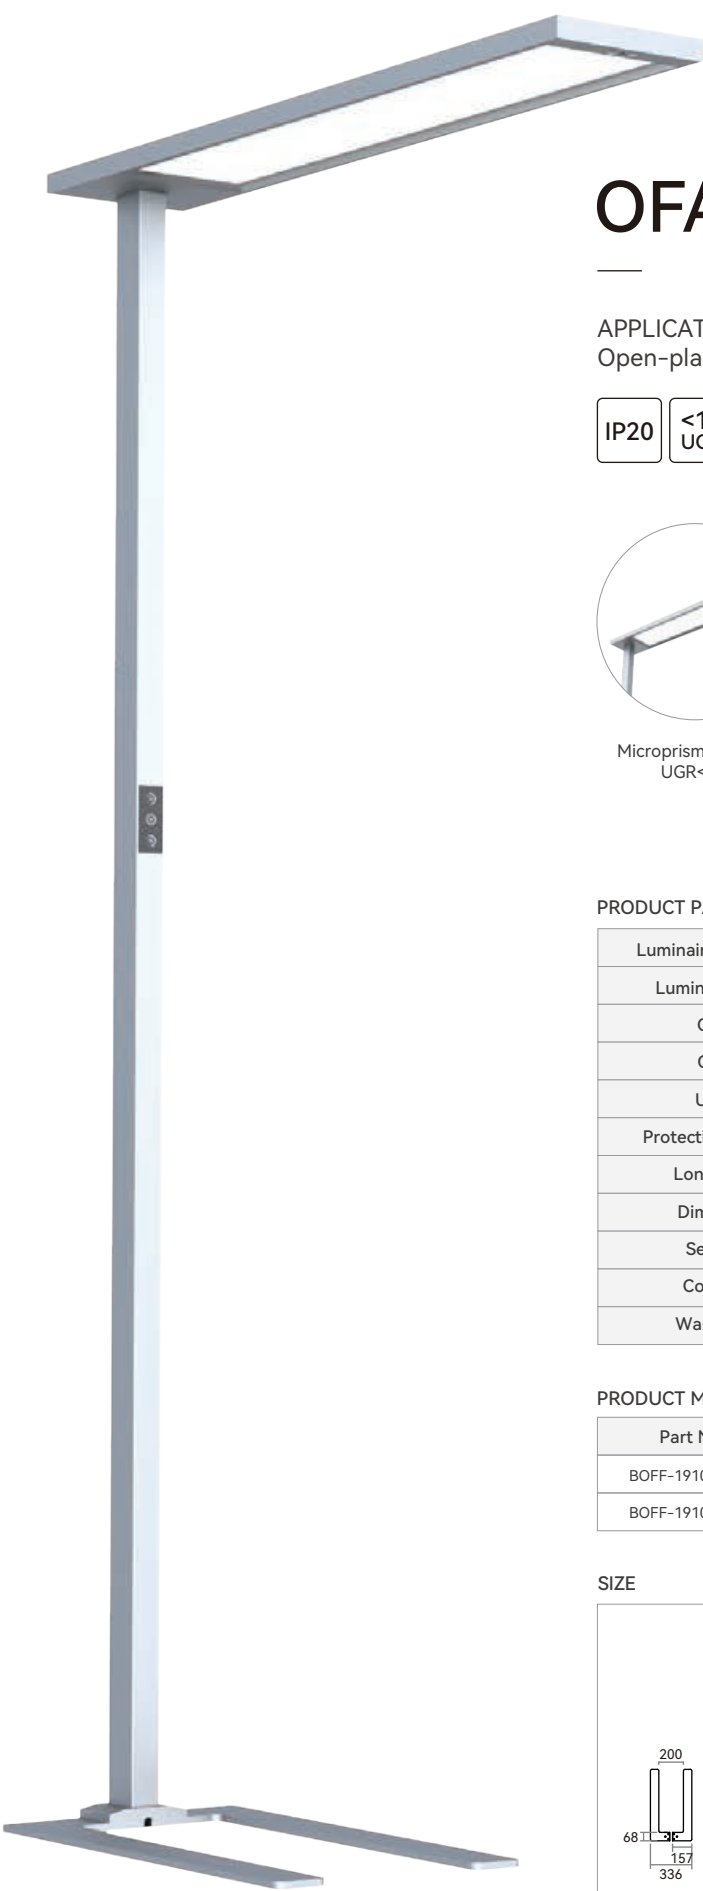


OFA

APPLICATIONS:
Open-plan office, individual office, etc.



Microprism diffuser
UGR<14



140° Indirect light,
provide comfortable
light to space



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	100W	
Luminous Flux	12000lm	10500lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BOFF-1910025-BD	↑ 9500lm/2500lm ↓	↑ 75W/25W ↓	3000/4000/6000K
BOFF-1910025-CD	↑ 8250lm/2250lm ↓	↑ 75W/25W ↓	3000~5700K

SIZE

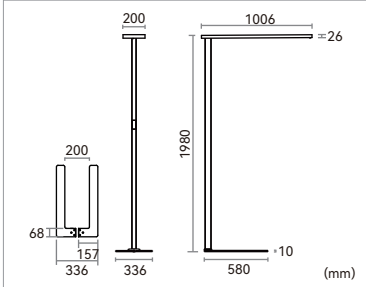


LIGHT DISTRIBUTION



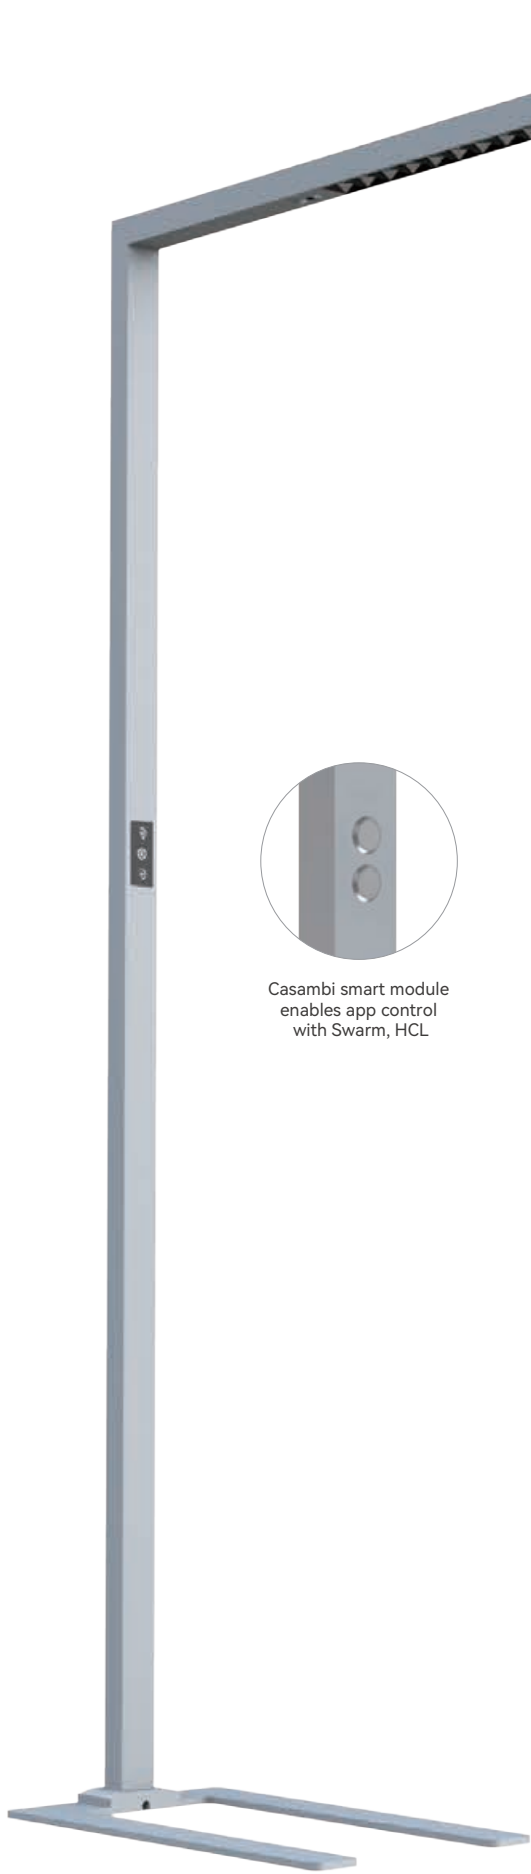


ELFOO-F 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.



Direct light 75°/50°
Indirect light 155°



Daylight sensor
Motion sensor



Casambi smart module
enables app control
with Swarm, HCL



Casambi smart module
enables app control
with Swarm, HCL


PRODUCT PARAMETERS

Luminaire Wattage	80W		
Luminous Flux	10800lm	9600lm	10500lm
CCT	3000/4000/6000K	3000~5700K	3000~5700K
CRI	>80		
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓		
UGR	<12		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		Casambi
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BEFF-1908020-BD-01	↑ 8500lm/2300lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BEFF-1908020-CD-01	↑ 7500lm/2100lm ↓	↑ 60W/20W ↓	3000~5700K
BEFF-1908020-CC-01	↑ 8800lm/1700lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

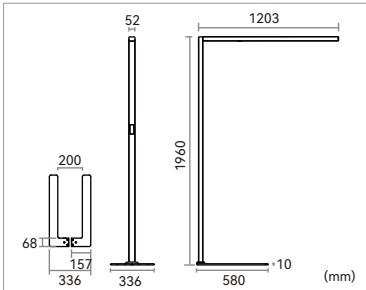

LIGHT DISTRIBUTION





ELFOO-D 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<12 UGR

Dimmable

Tunable White

HCL system

CAS A+ MB1


SWIRL™

CE

RoHS



Direct light 75°/50°,
Indirect light 155°



Daylight sensor
Motion sensor



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	150W	
Luminous Flux	19500lm	16500lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓	
UGR	<12	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BEFD-1915040-BD-01	↑ 14700lm/4800lm ↓	↑ 110W/40W ↓	3000/4000/6000K
BEFD-1915040-CD-01	↑ 12100lm/4400lm ↓	↑ 110W/40W ↓	3000~5700K

SIZE

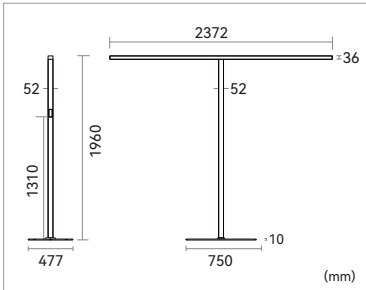

LIGHT DISTRIBUTION





LENO-F 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20


<6
UGR

Dimmable

Tunable White

HCL system

CAS A MBI



Micro reflector design
UGR<6



Daylight sensor
Presence sensor



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W	
Luminous Flux	11600lm	11200lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
Beam Angle	↑ 115° / 50° ↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Motion sensor / Presence sensor or Daylight sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BLEF-1908020-BD-01	↑ 9300lm/2300lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BLEF-1908020-CD-01	↑ 8950lm/2250lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

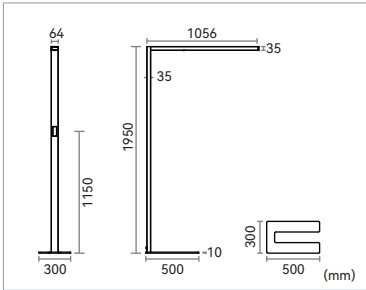

LIGHT DISTRIBUTION



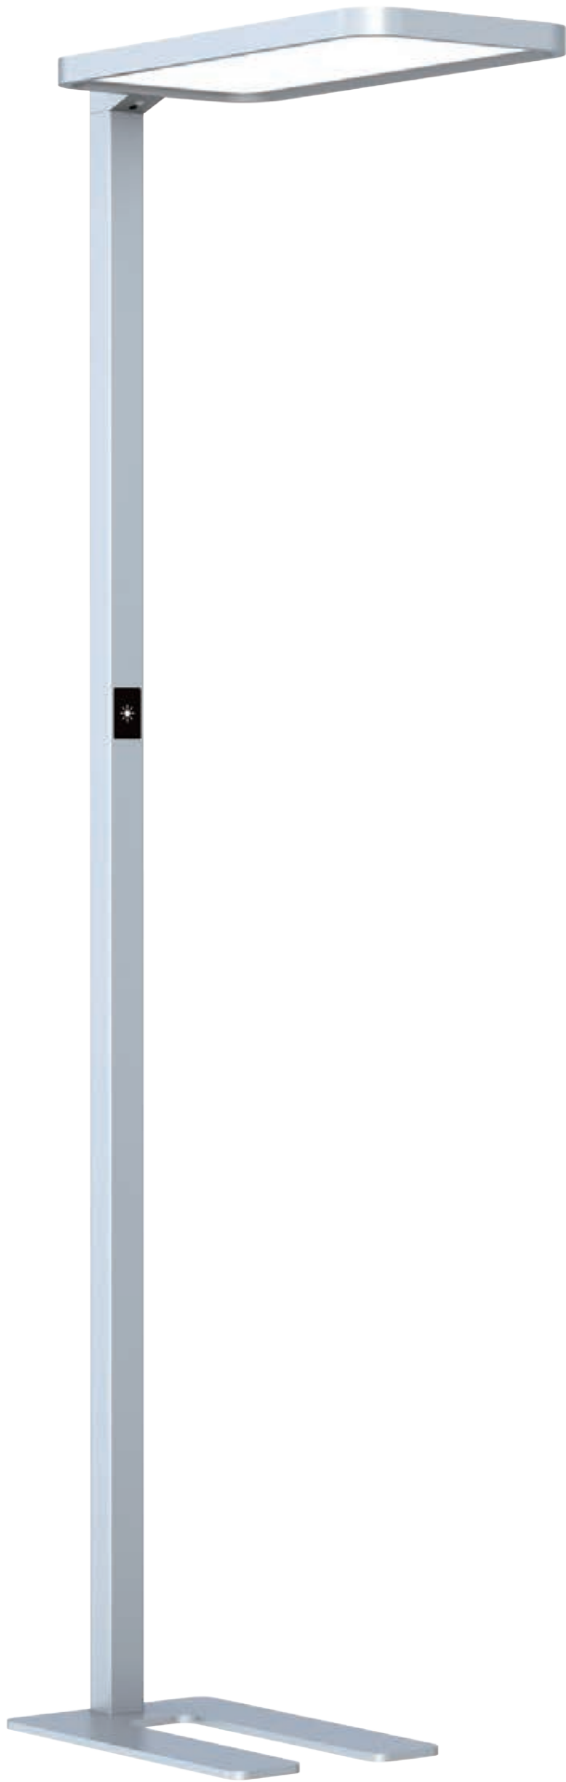

MAYE-FR 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18 UGR

Dimmable

Tunable White

HCL system

CAS A+MBI

三星认证

CE

RoHS

High light efficiency reach 150LM/W

Daylight sensor Motion sensor

Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BMRF-1908040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRF-1908022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRF-1908022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMRF-1910020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRF-1910020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

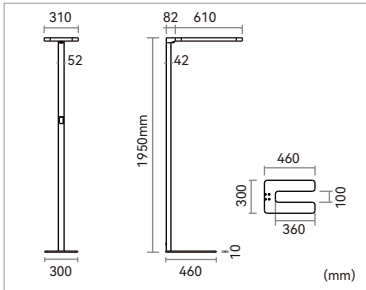

LIGHT DISTRIBUTION



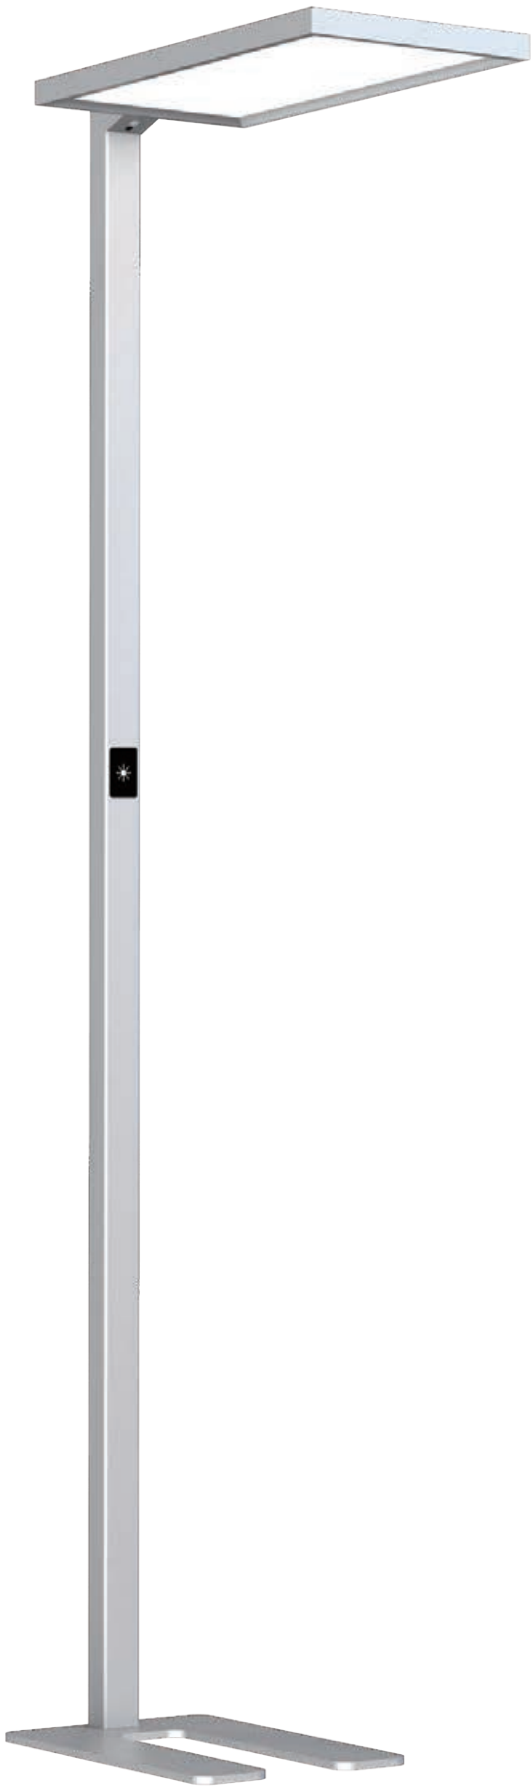

MAYE-FS 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.



High light efficiency
reach 150LM/W



Daylight sensor
Motion sensor



Direct and indirect light
control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BMSF-1908040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMSF-1908022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMSF-1908022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMSF-1910020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMSF-1910020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

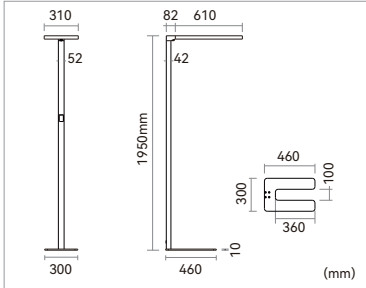

LIGHT DISTRIBUTION





HOMECE 3.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<19
UGR

Dimmable

CE


R6346



High light efficiency
reach 145LM/W



Daylight sensor
Motion sensor



Cut-Off Pole, Good for
shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BHOJ-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOJ-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOJ-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOJ-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOJ-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

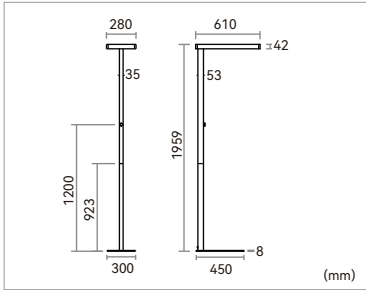

LIGHT DISTRIBUTION



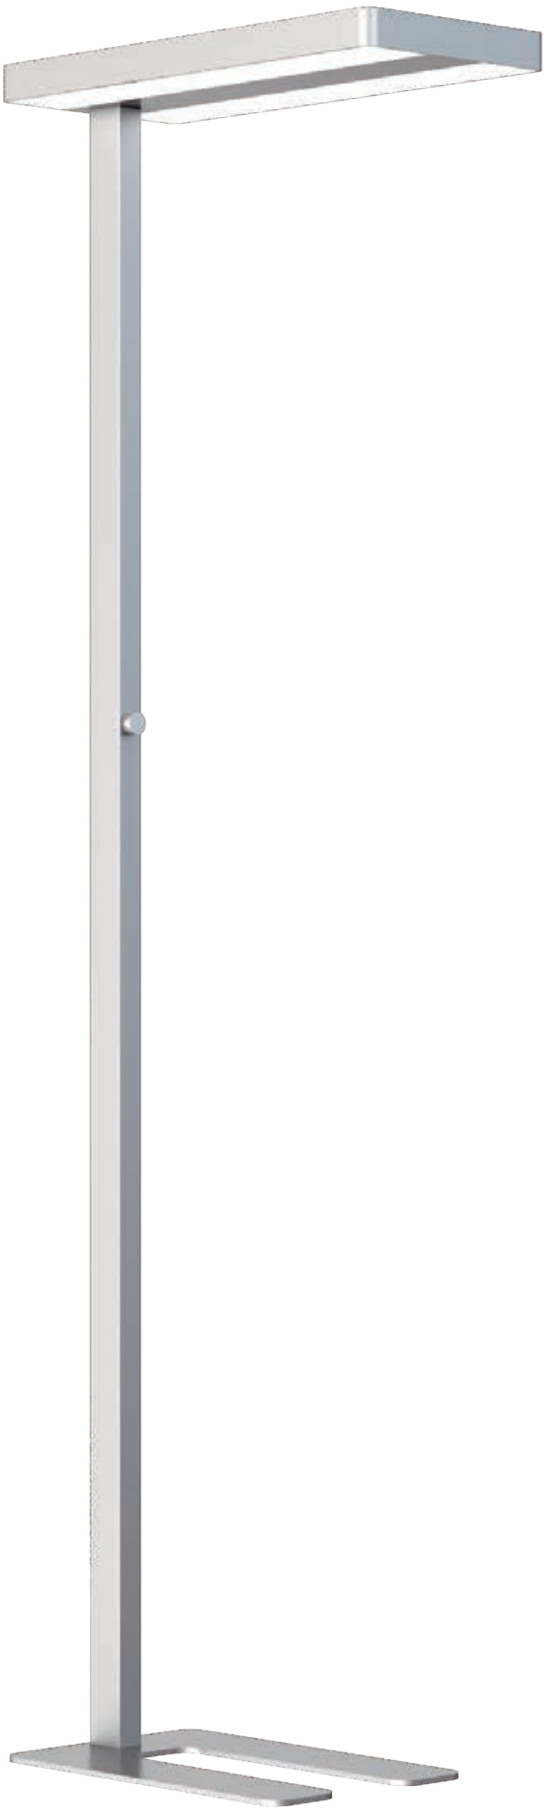

HOME0 3.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<19
UGR


Dimmable



High light efficiency
reach 145LM/W



Daylight sensor
Motion sensor



Knob dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BHOF-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOF-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOF-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOF-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOF-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

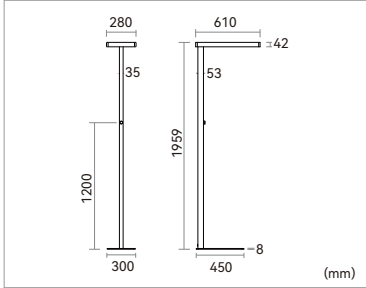

LIGHT DISTRIBUTION



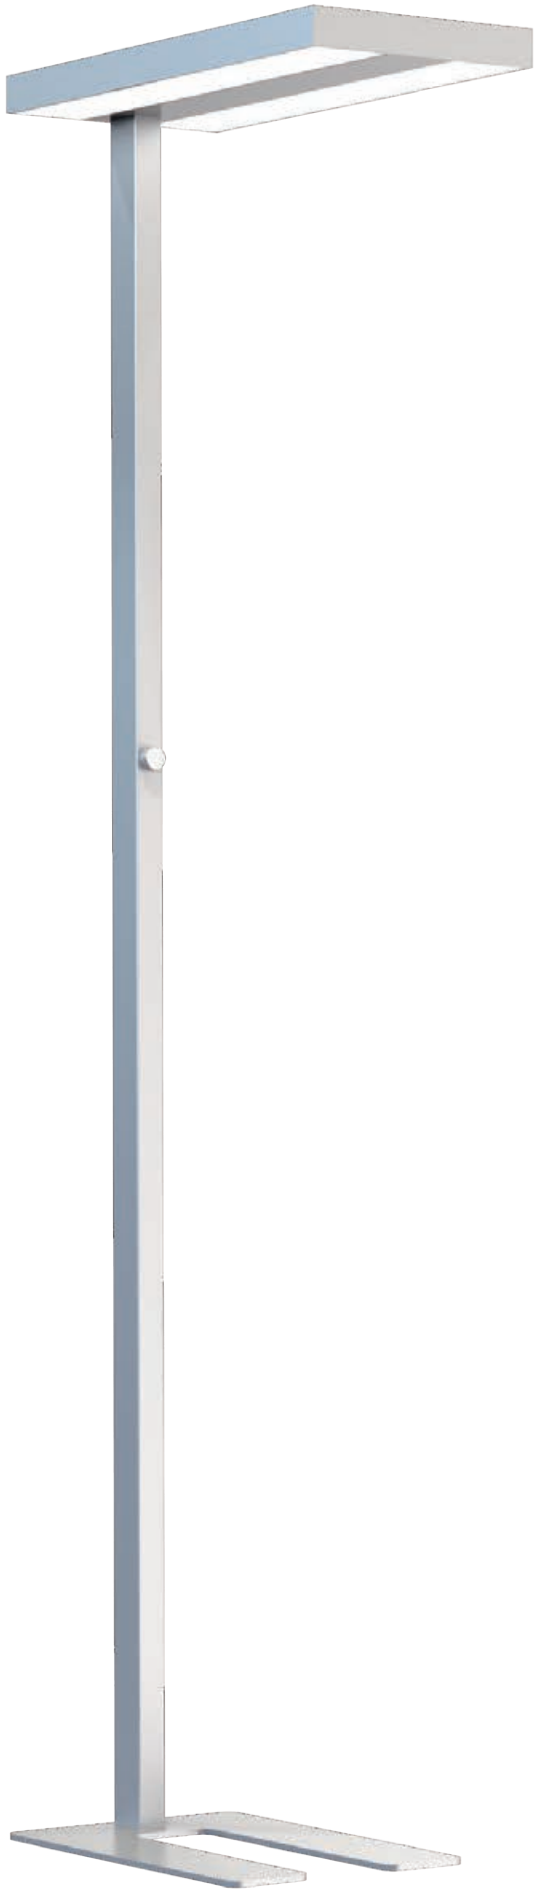

NITEC 3.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<19
UGR


Dimmable



High light efficiency
reach 145LM/W



UGR<19, uniform and
healthy lighting



Cut-Off Pole, Good for
shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BNIJ-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIJ-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIJ-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIJ-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIJ-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIJ-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIJ-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIJ-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIJ-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

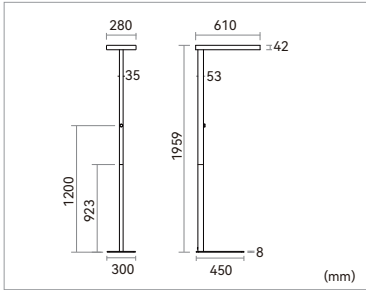

LIGHT DISTRIBUTION



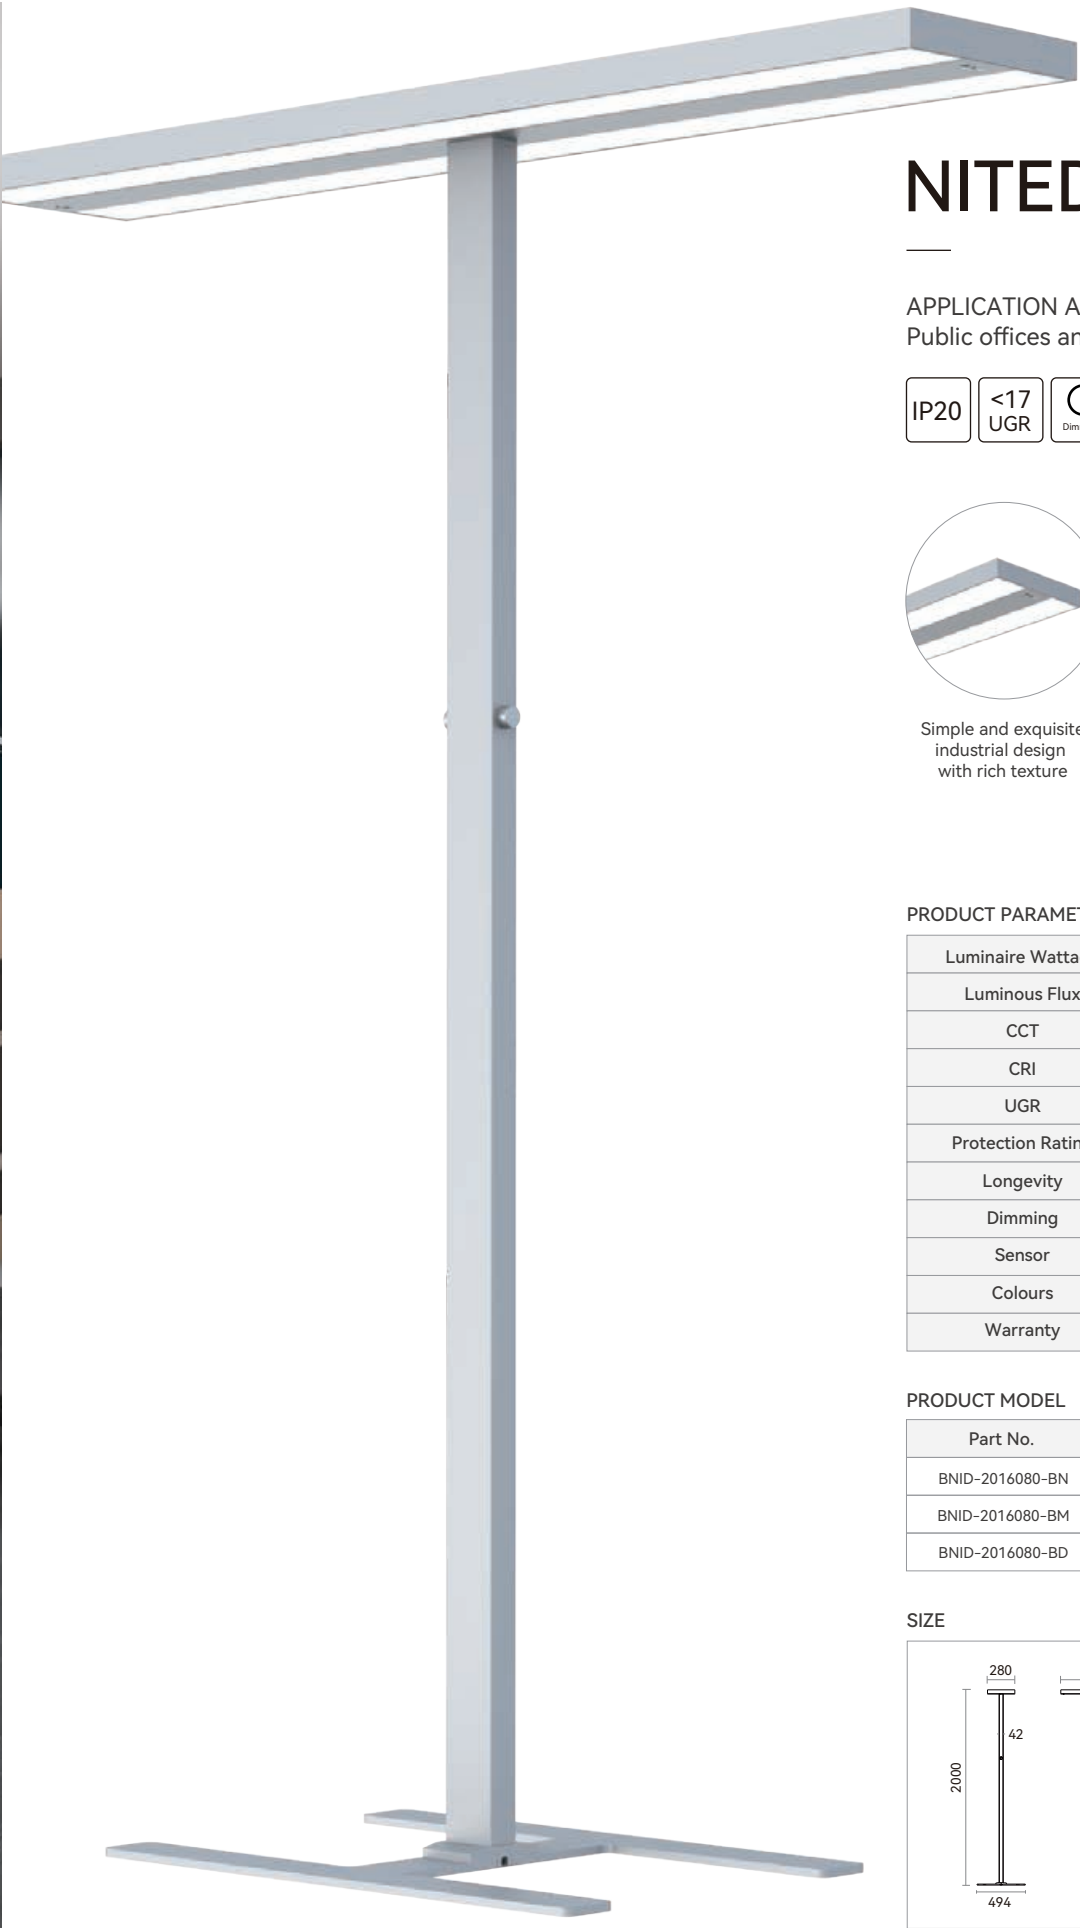

NITED

APPLICATION AREAS:
Public offices and other office spaces.

IP20

<17
UGR


Dimmable







Simple and exquisite industrial design with rich texture



UGR<17, uniform and healthy lighting



Daylight sensor
Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	160W
Luminous Flux	19200lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BNID-2016080-BN	↑ 11500lm/7700lm ↓	↑ 80W/80W ↓	3000/4000/6000K
BNID-2016080-BM	↑ 11500lm/7700lm ↓	↑ 80W/80W ↓	3000/4000/6000K
BNID-2016080-BD	↑ 11500lm/7700lm ↓	↑ 80W/80W ↓	3000/4000/6000K

SIZE

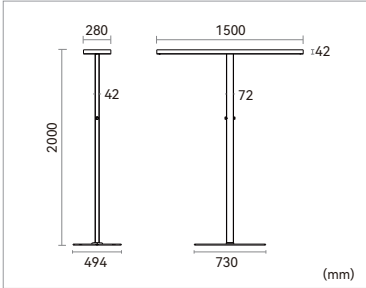

LIGHT DISTRIBUTION



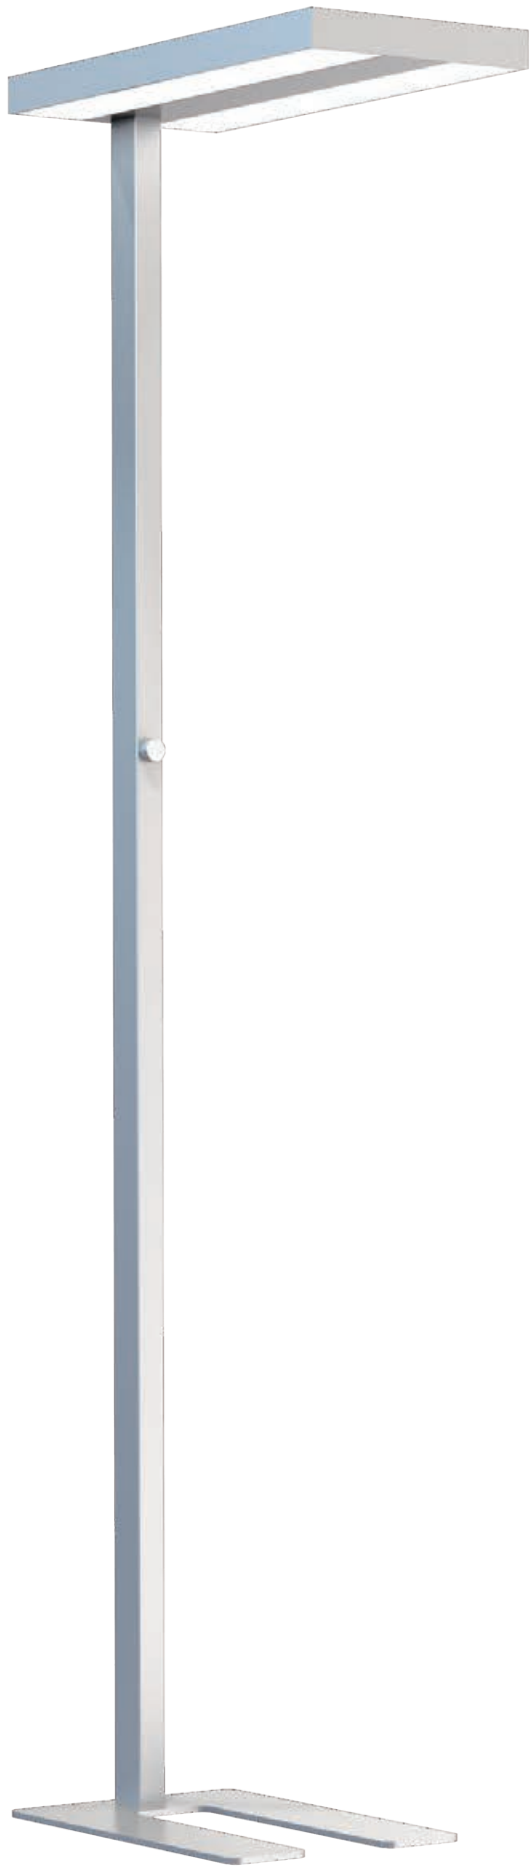


NITEO 3.0 NEW


APPLICATION AREAS:
For personal offices, public offices and other office spaces.



Simple and exquisite industrial design with rich texture



UGR<19, uniform and healthy lighting



Daylight sensor
Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNIF-1906030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIF-1906030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIF-1906030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIF-1908040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIF-1908040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIF-1908040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIF-1908020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIF-1908020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIF-1908020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

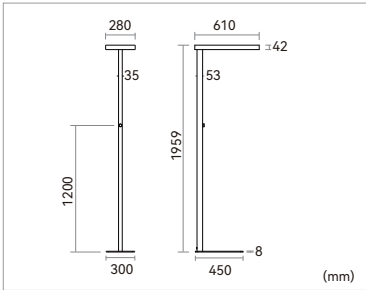

LIGHT DISTRIBUTION




02

DESK FIXED LUMINAIRES

APPLICATIONS:

Open-plan office, individual office, etc.

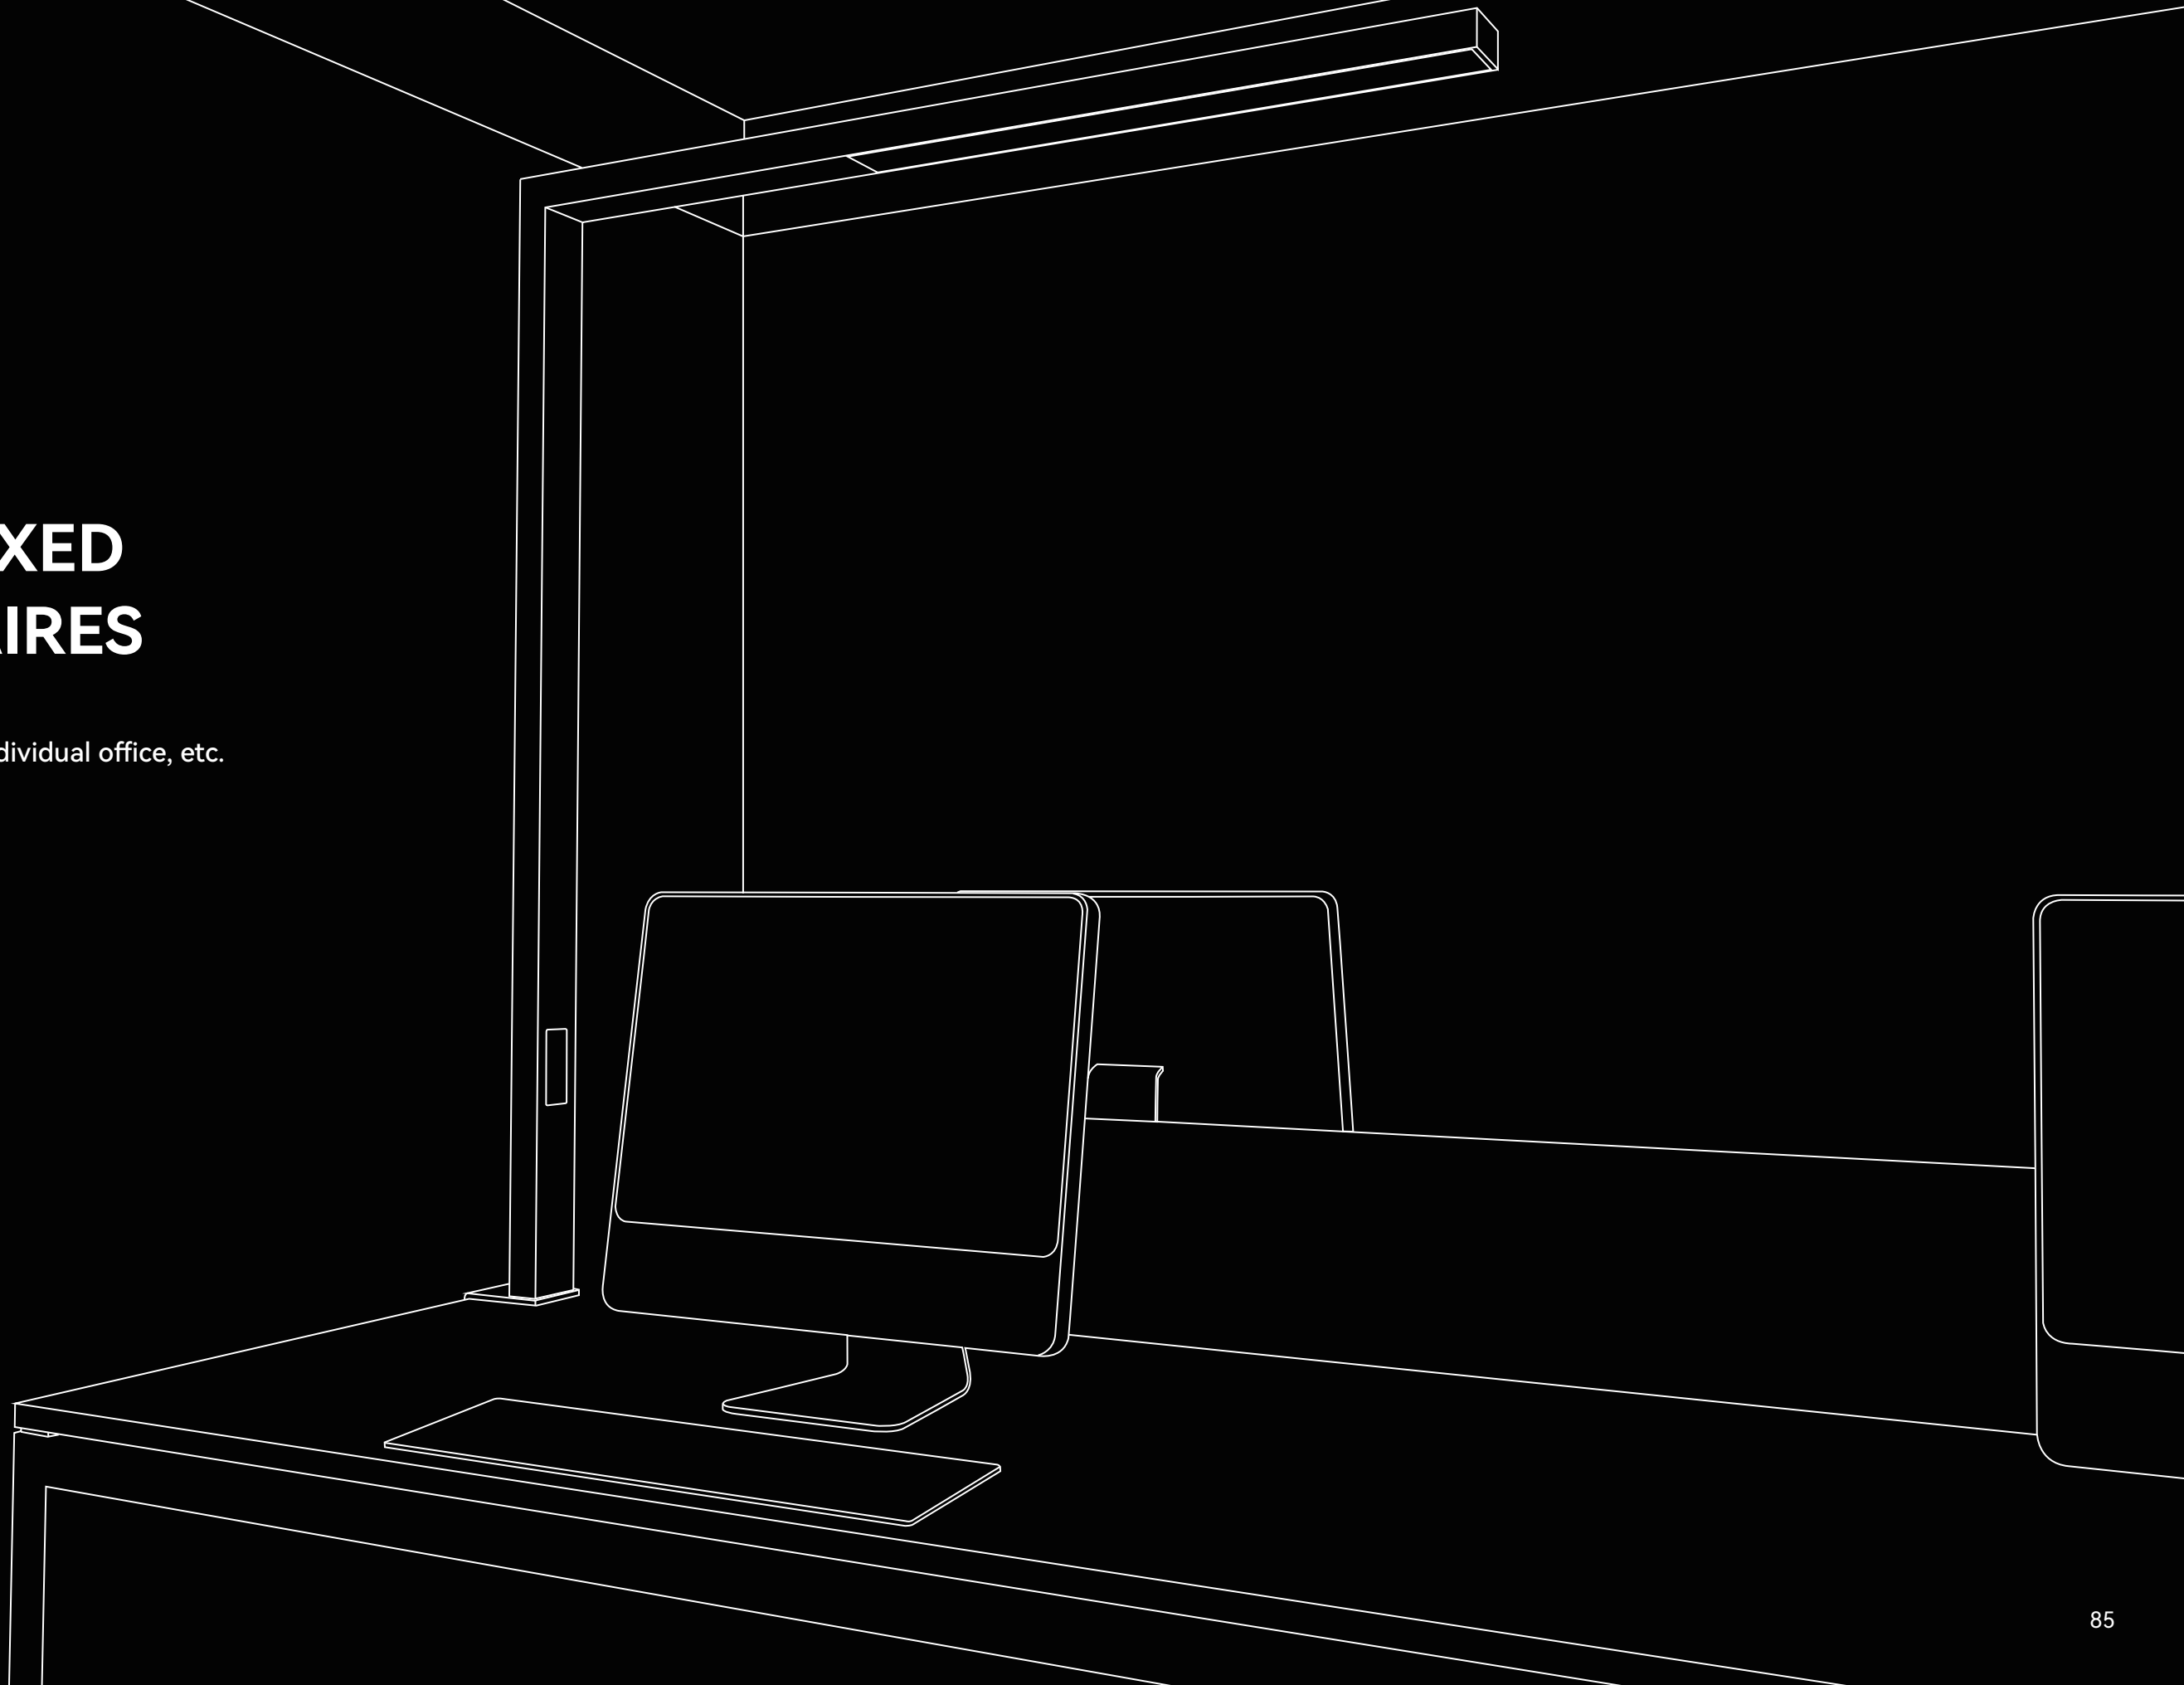

DESK FIXED LUMINAIRES



FIT-T

MAYE-TR 2.0

MAYE-TS 2.0


HOMET 3.0

NITET 3.0

ELFOO-T 2.0

LENO-T 2.0

Luminaire Wattage	60W	80W/ 100W	80W/ 100W	60W/ 80W	60W/ 80W	80W	80W
Luminous Flux	5530lm	11200lm/ 11516lm/ 15000lm	11200lm/ 11516lm/ 15000lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	10800lm	11600lm
UGR	<18	<18/ <14/ <13	<18/ <14/ <13	<16/ <19/ <11	<16/ <19/ <11	<12	<6
optics	↑ 100°/70° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 115° / 80° ↓	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓	↑ 115° / 50° ↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Knob dimming	Touch panel dimming	Touch panel dimming
Sensor	Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor
Colours							

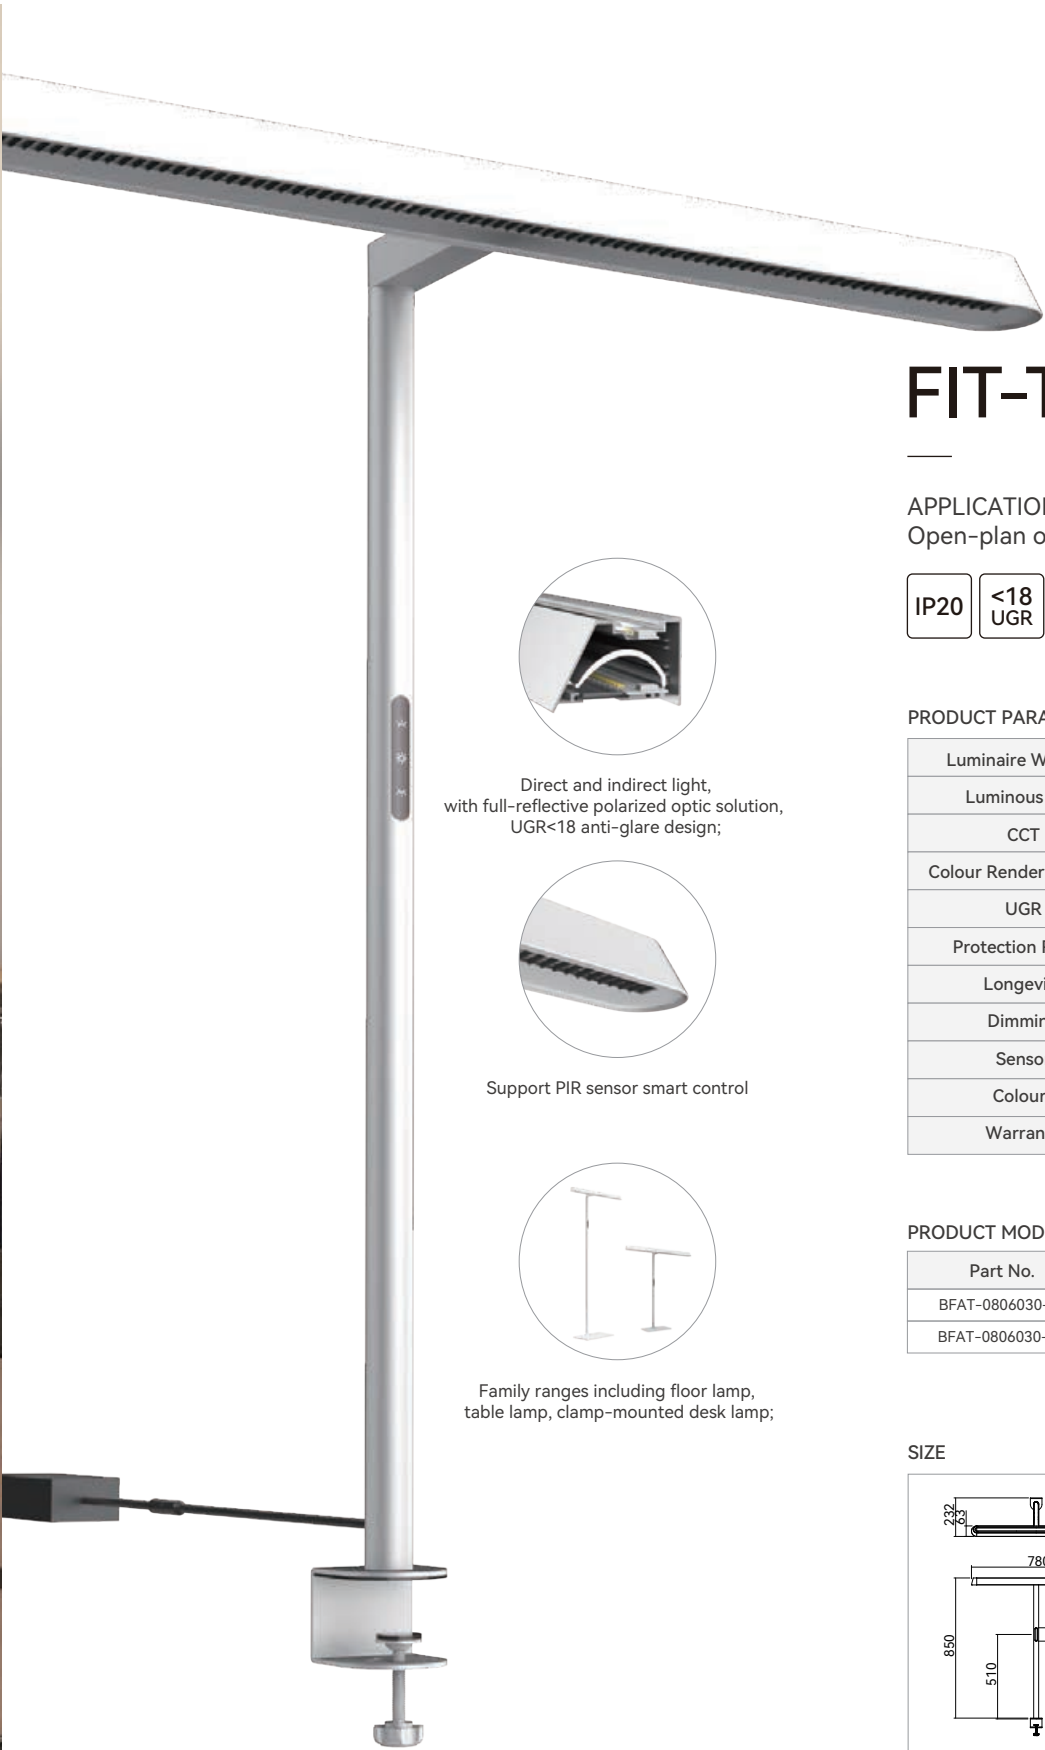

FIT-T



APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<18
UGR

Dimmable


PRODUCT PARAMETERS

Luminaire Wattage	60W	
Luminous Flux	5530lm	
CCT	3000K / 4000K / 6000K	
Colour Rendering Index	>80	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	NO	Motion sensor
Colours	Silver / White / Black	
Warranty	5 years	



PRODUCT MODEL

Part No.	LM	Power	CCT
BFAT-0806030-BN	↑ 4050lm/1480lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BFAT-0806030-BM	↑ 4050lm/1480lm ↓	↑ 30W/30W ↓	3000/4000/6000K

SIZE

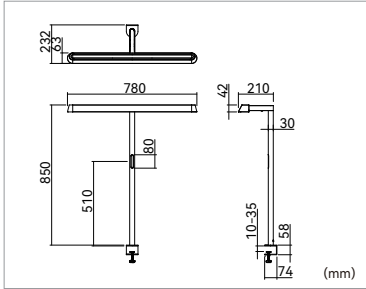

LIGHT DISTRIBUTION




Direct and indirect light,
with full-reflective polarized optic solution,
UGR<18 anti-glare design;



Support PIR sensor smart control



Family ranges including floor lamp,
table lamp, clamp-mounted desk lamp;

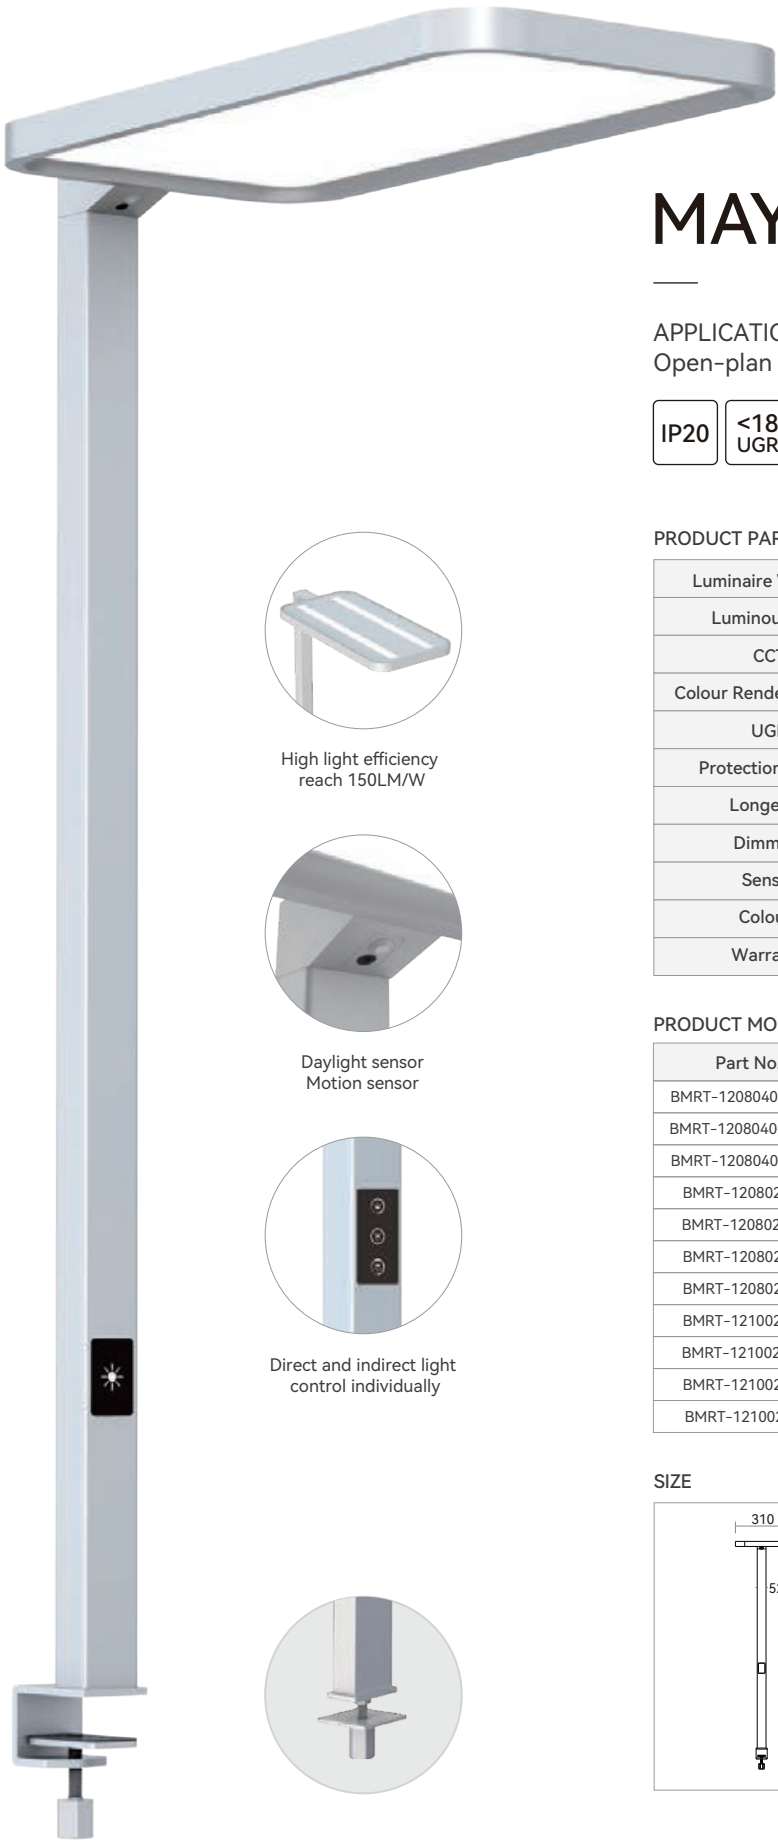

MAYE-TR 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.




PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BMRT-1208040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMRT-1208022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMRT-1208022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMRT-1210020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMRT-1210020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

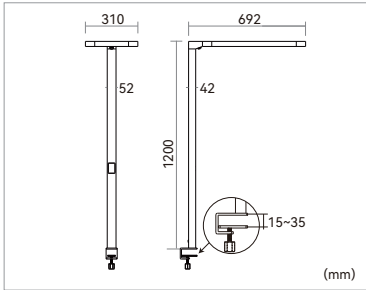

LIGHT DISTRIBUTION



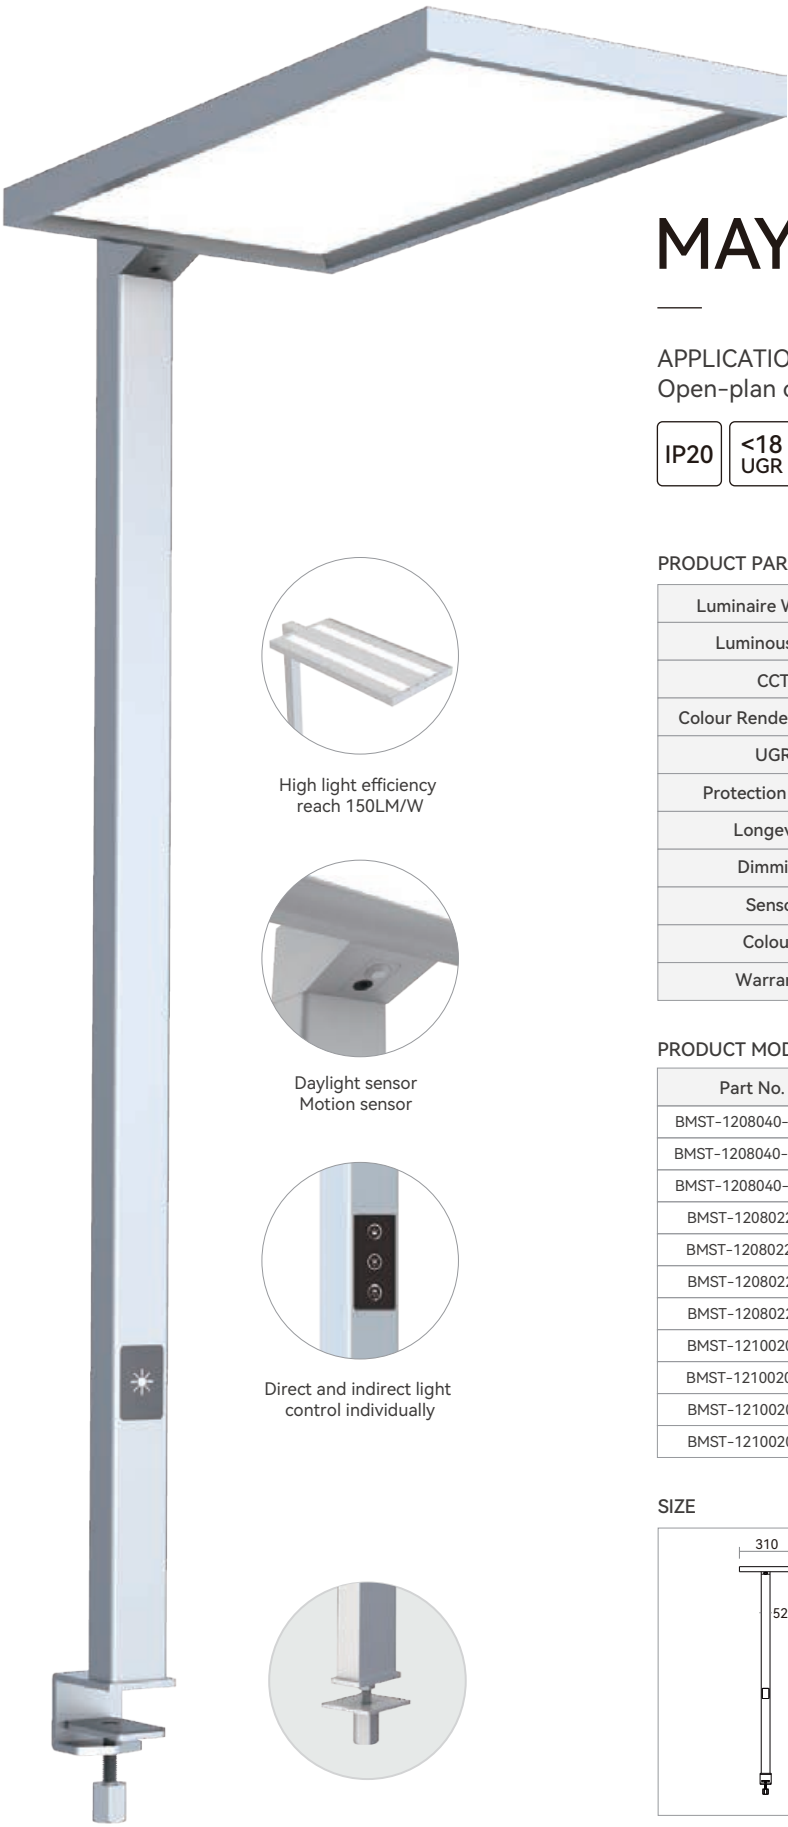

MAYE-TS 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.




PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BMST-1208040-BN-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208040-BM-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208040-BD-01	↑ 6400lm/4800lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BMST-1208022-BN	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-BM	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-BD	↑ 8926lm/2590lm ↓	↑ 58W/22W ↓	3000/4000/6000K
BMST-1208022-CD	↑ 8200lm/2200lm ↓	↑ 58W/22W ↓	3000~5700K
BMST-1210020-BN	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-BM	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-BD	↑ 12500lm/2500lm ↓	↑ 80W/20W ↓	3000/4000/6000K
BMST-1210020-CD	↑ 11050lm/2500lm ↓	↑ 80W/20W ↓	3000~5700K

SIZE

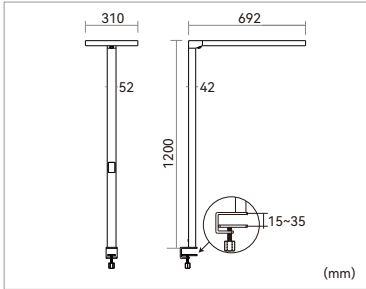

LIGHT DISTRIBUTION



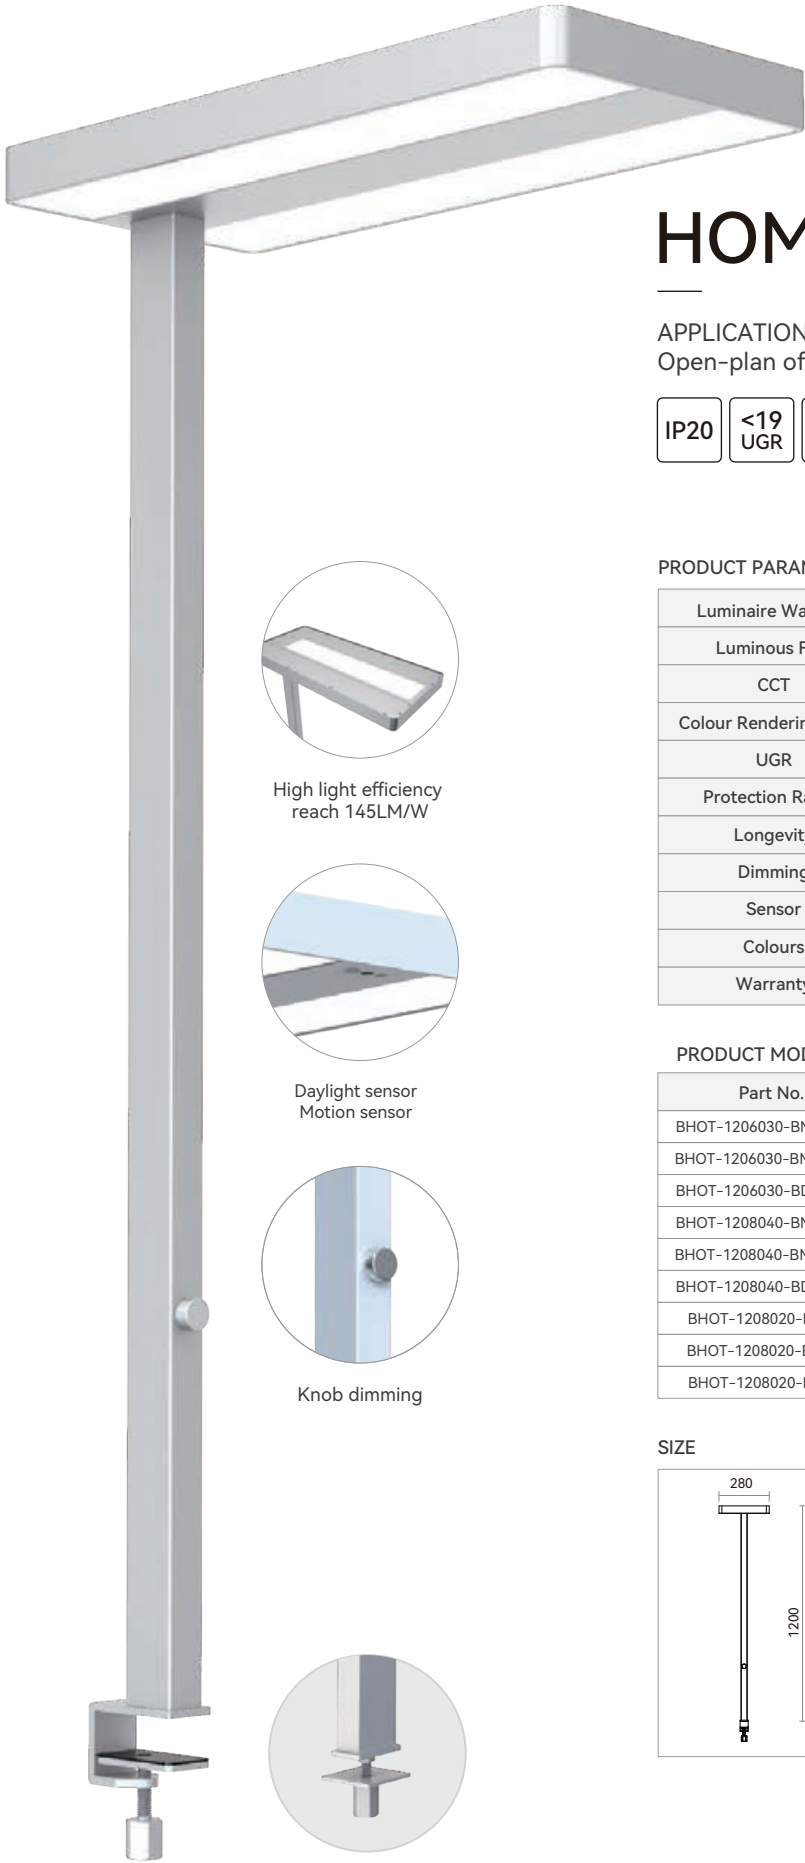

HOMET 3.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<19
UGR

Dimmable

PRODUCT PARAMETERS


Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		




High light efficiency
reach 145LM/W



Daylight sensor
Motion sensor




Knob dimming




PRODUCT MODEL


Part No.	LM	Power	CCT
BHOT-1206030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1206030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1206030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BHOT-1208040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BHOT-1208020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOT-1208020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BHOT-1208020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

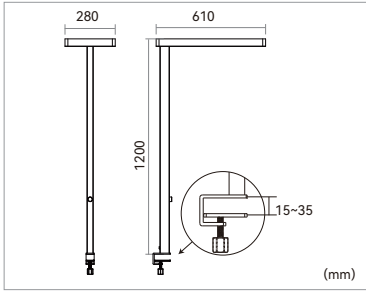

LIGHT DISTRIBUTION



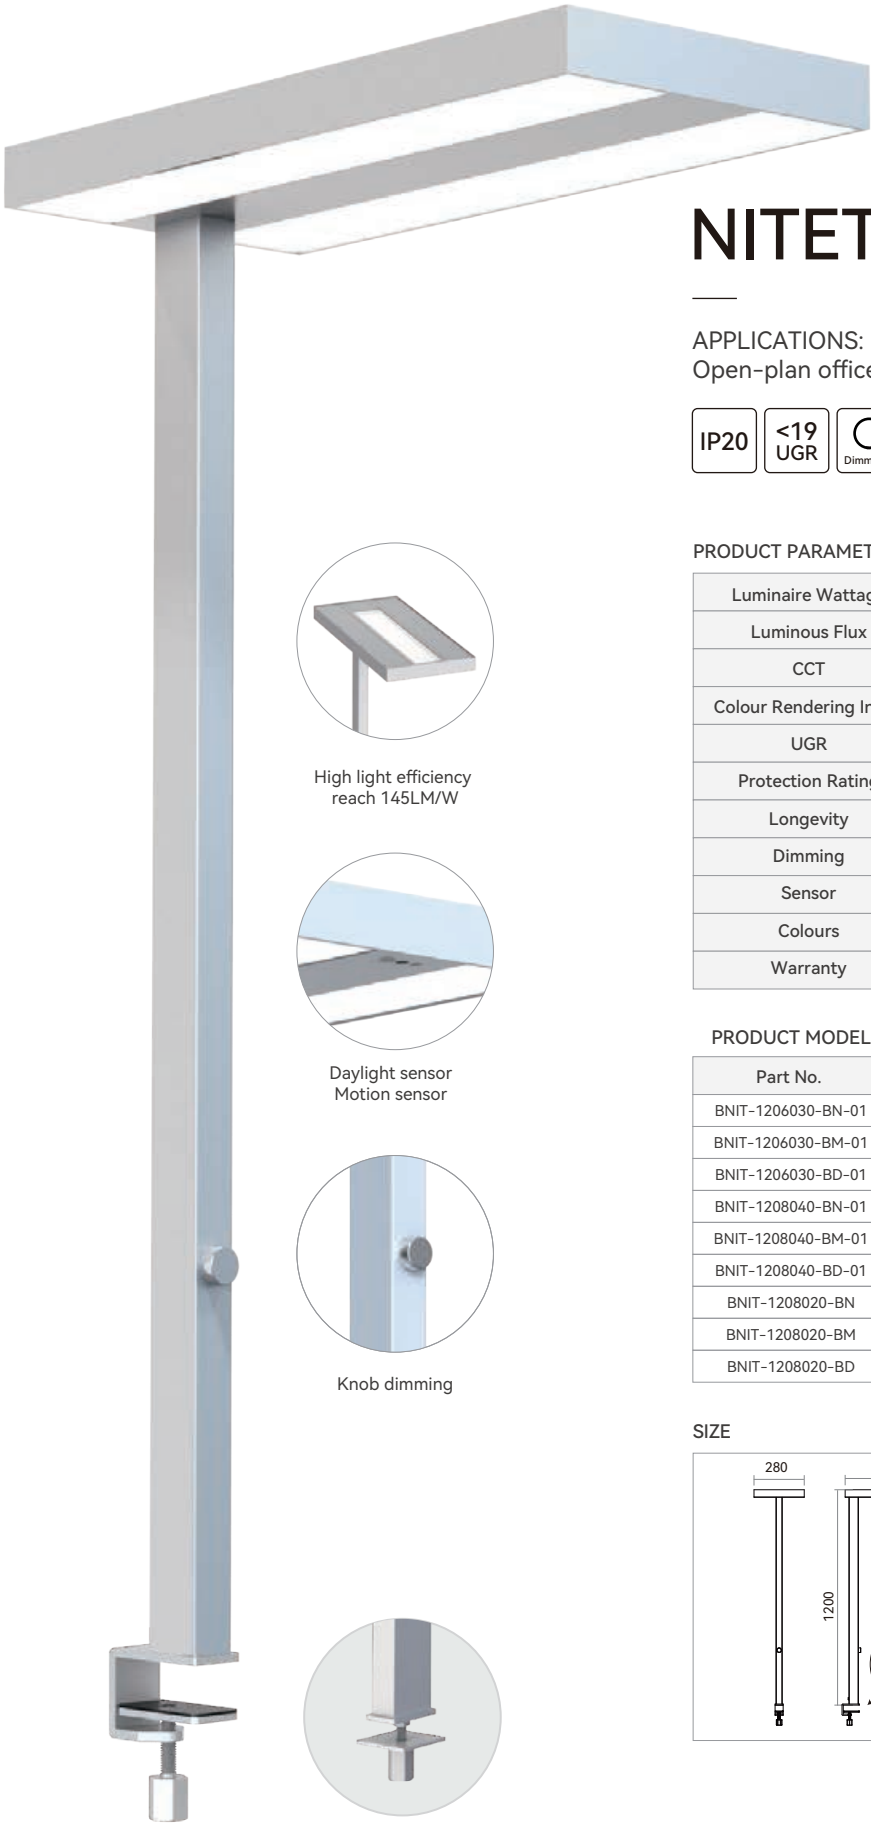

NITET 3.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.




PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNIT-1206030-BN-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1206030-BM-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1206030-BD-01	↑ 4990lm/2740lm ↓	↑ 30W/30W ↓	3000/4000/6000K
BNIT-1208040-BN-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208040-BM-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208040-BD-01	↑ 6300lm/4500lm ↓	↑ 40W/40W ↓	3000/4000/6000K
BNIT-1208020-BN	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIT-1208020-BM	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BNIT-1208020-BD	↑ 9600lm/2000lm ↓	↑ 60W/20W ↓	3000/4000/6000K

SIZE

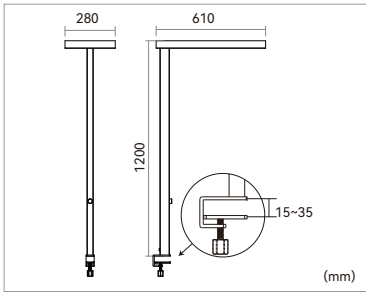


LIGHT DISTRIBUTION




High light efficiency
reach 145LM/W



Daylight sensor
Motion sensor



Knob dimming





ELFOO-T 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20

<12
UGR

Dimmable

Tunable White

HCL system

CAS A MBI

SINUS DIM

CE

RoHS


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10400lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 155° / 75° ↓ or ↑ 155° / 50° ↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BEFT-1208020-BD-01	↑ 8000lm/2400lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BEFT-1208020-CD-01	↑ 6600lm/2200lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

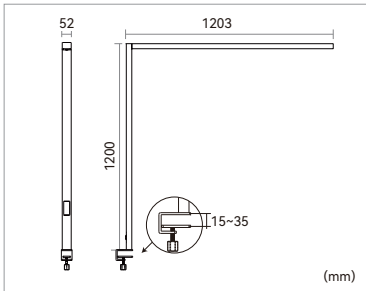

LIGHT DISTRIBUTION



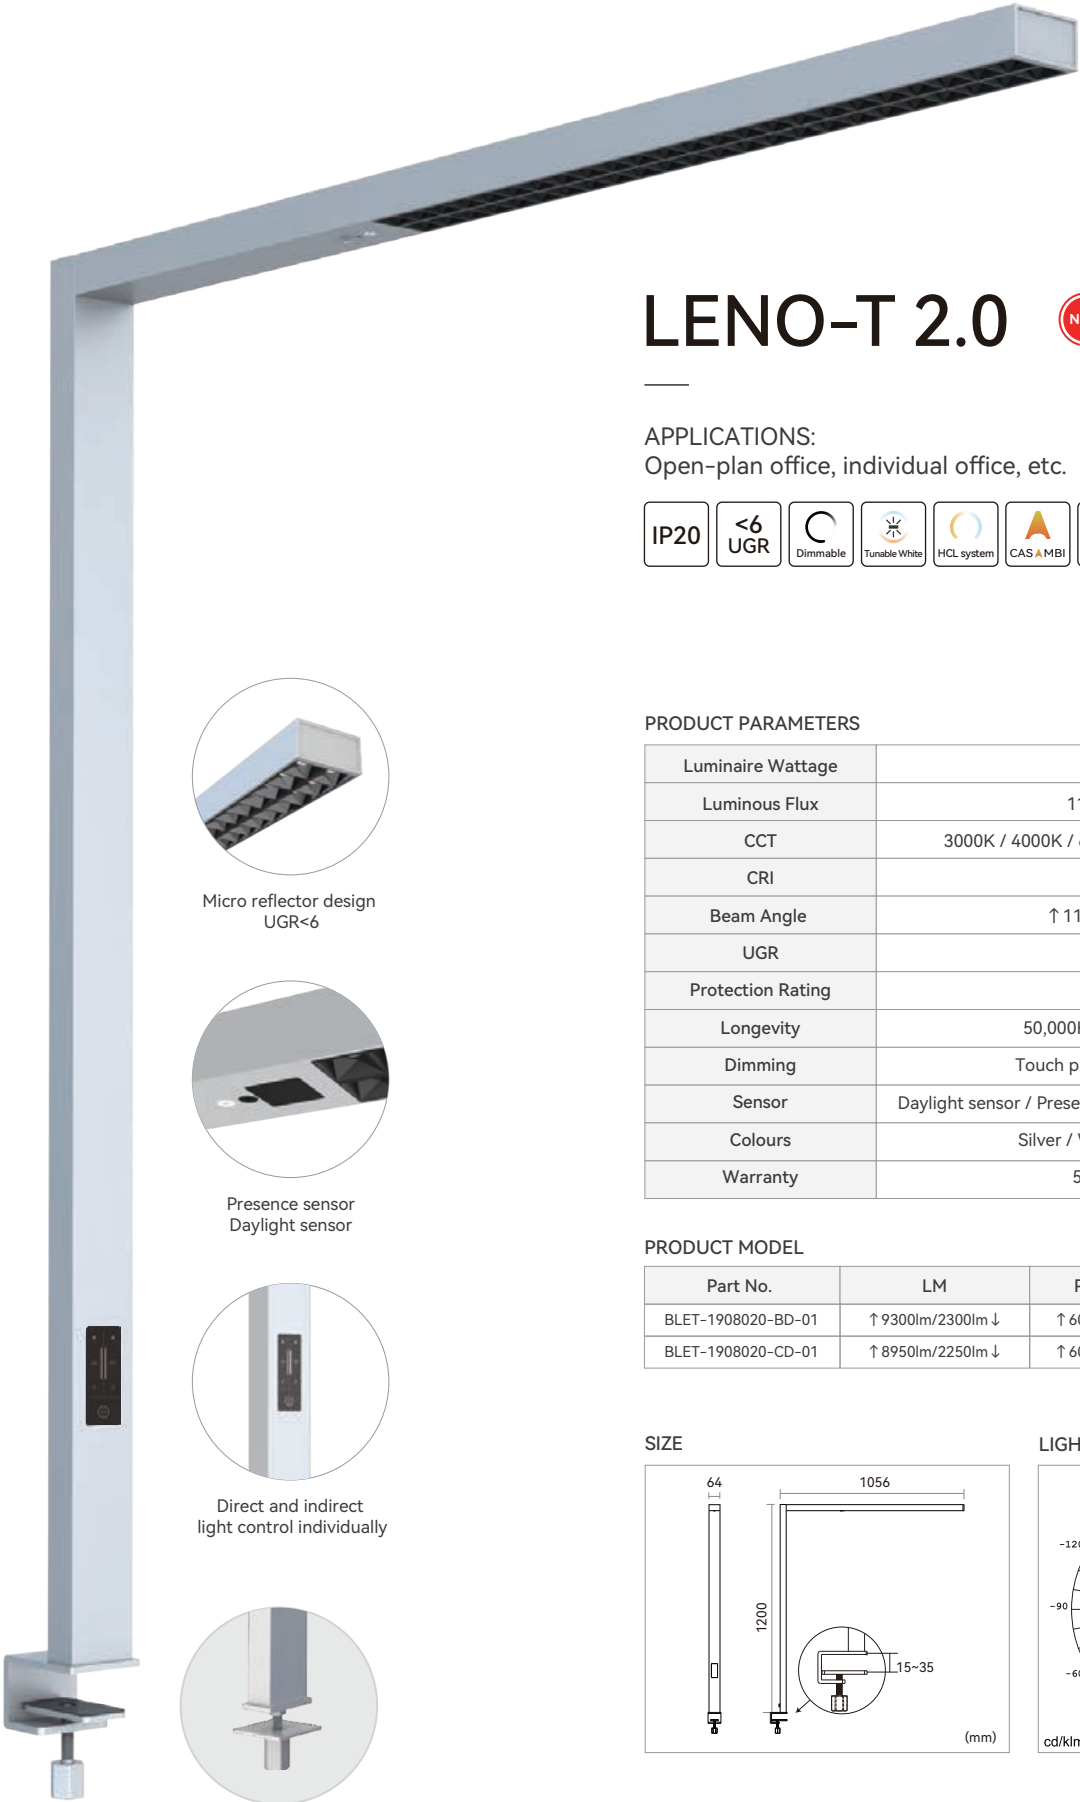

LENO-T 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.




PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11600lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑ 115° / 50° ↓
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Presence sensor or Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BLET-1908020-BD-01	↑ 9300lm/2300lm ↓	↑ 60W/20W ↓	3000/4000/6000K
BLET-1908020-CD-01	↑ 8950lm/2250lm ↓	↑ 60W/20W ↓	3000~5700K

SIZE

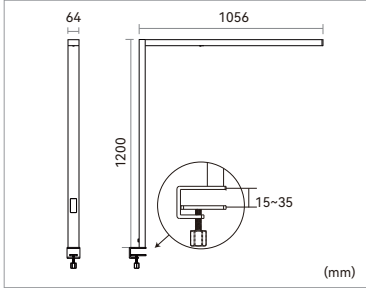

LIGHT DISTRIBUTION




03

PENDANT LUMINAIRES

APPLICATIONS:

Open-plan office, training room,
conference room and other office spaces.

PENDANT LUMINAIRES



Dawn-P0

Dawn-P1

Equo-P

MAYE Pro-PS

ROMAN-P0

ROMAN-P1


EZY-P

Luminaire Wattage	60W/ 80W	60W/ 70W	60W/ 80W Power switchable	60W/ 70W	60W/ 70W	60W/ 80W/ 120W	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable
Luminous Flux	10000lm/ 12800lm	9600lm/ 10700lm	7800lm/ 9100lm	8400lm/ 8700lm/ 10150lm	8910lm/ 10400lm	9000lm/ 12000lm/ 18000lm	2500lm/ 3240lm 4000lm/ 5300lm 6720lm/ 8400lm
UGR	<13	<17	<16	<16	<15	<6	<19/ <22
optics	↑ 115°/70° ↓	↑ 115° / 70° ↓	↑ 155° / 70° ↓	↑ 110° / 80° ↓	↑ 115° / 60° ↓	↑ 115° / 60° ↓	↑ 110° / 90° ↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K CCT switchable
Function	On/off / DALI	On/off / DALI	On/off / DALI	On/off / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / DALI
Colours							

PENDANT LUMINAIRES




KEY-P

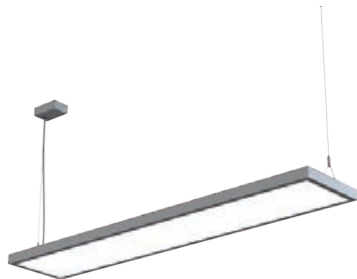

FREE-P




ROMI-P

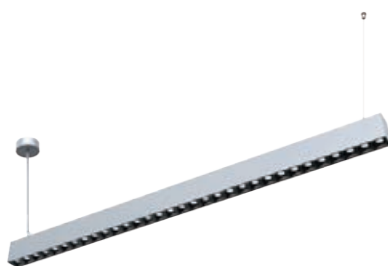

ELFOO-P



LENO-P2

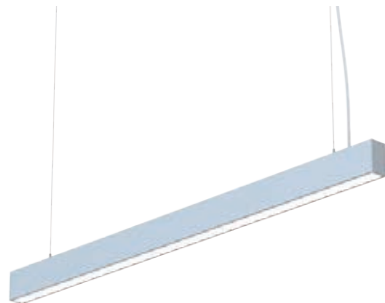

LICON-P


Luminaire Wattage	30W/ 40W/ 50W/ 60W	50W/ 60W	18W/ 30W/ 48W/ 80W	60W/ 70W	50W/ 60W	40W/ 48W/ 50W/ 60W
Luminous Flux	3600lm/ 4800lm/ 6250lm/ 7500lm 6500lm/ 7800lm	6350lm/ 7620lm	1700lm/ 3300lm/ 5760lm/ 9600lm	6300lm/ 7400lm	6250lm/ 7500lm	3600lm/ 5300lm/ 4500lm/ 6600lm
UGR	<13	<19	<18	<15	<6	<21
optics	↑ 110° / 90° ↓	↑ 115° / 80° ↓	↑ 100° / 95° ↓	↑ 140° / 75° ↓ or ↑ 140° / 50° ↓	↑ 115° / 50° ↓	↑ 110° / 80° ↓
CRI	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours						

Dawn-P0 NEW

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



- Up to 160 lm/W for greater energy savings.
- Anti glare lens solution with side micro-light, low glare and high visual comfort
- UGR < 13, $L_{max} \geq 65^\circ \leq 3000 \text{cd/m}^2$, compliant with professional lighting design requirements;
- 4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;

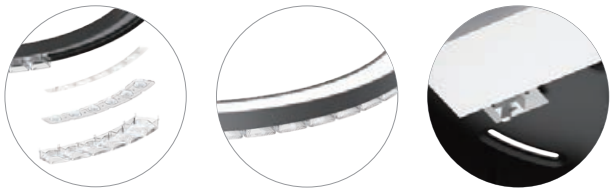


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W
Luminous Flux	10000lm	12800lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	$\uparrow 115^\circ / 70^\circ \downarrow$	
UGR	<13	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BDAP0-6506024-NN	$\uparrow 6700 \text{lm} / 3300 \text{lm} \downarrow$	$\uparrow 36 \text{W} / 24 \text{W} \downarrow$	On/off
BDAP0-6506024-DN	$\uparrow 6700 \text{lm} / 3300 \text{lm} \downarrow$	$\uparrow 36 \text{W} / 24 \text{W} \downarrow$	DALI dimming
BDAP0-9008032-NN	$\uparrow 7800 \text{lm} / 5000 \text{lm} \downarrow$	$\uparrow 48 \text{W} / 32 \text{W} \downarrow$	On/off
BDAP0-9008032-DN	$\uparrow 7800 \text{lm} / 5000 \text{lm} \downarrow$	$\uparrow 48 \text{W} / 32 \text{W} \downarrow$	DALI dimming

SIZE




LIGHT DISTRIBUTION



Dawn-P1



APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

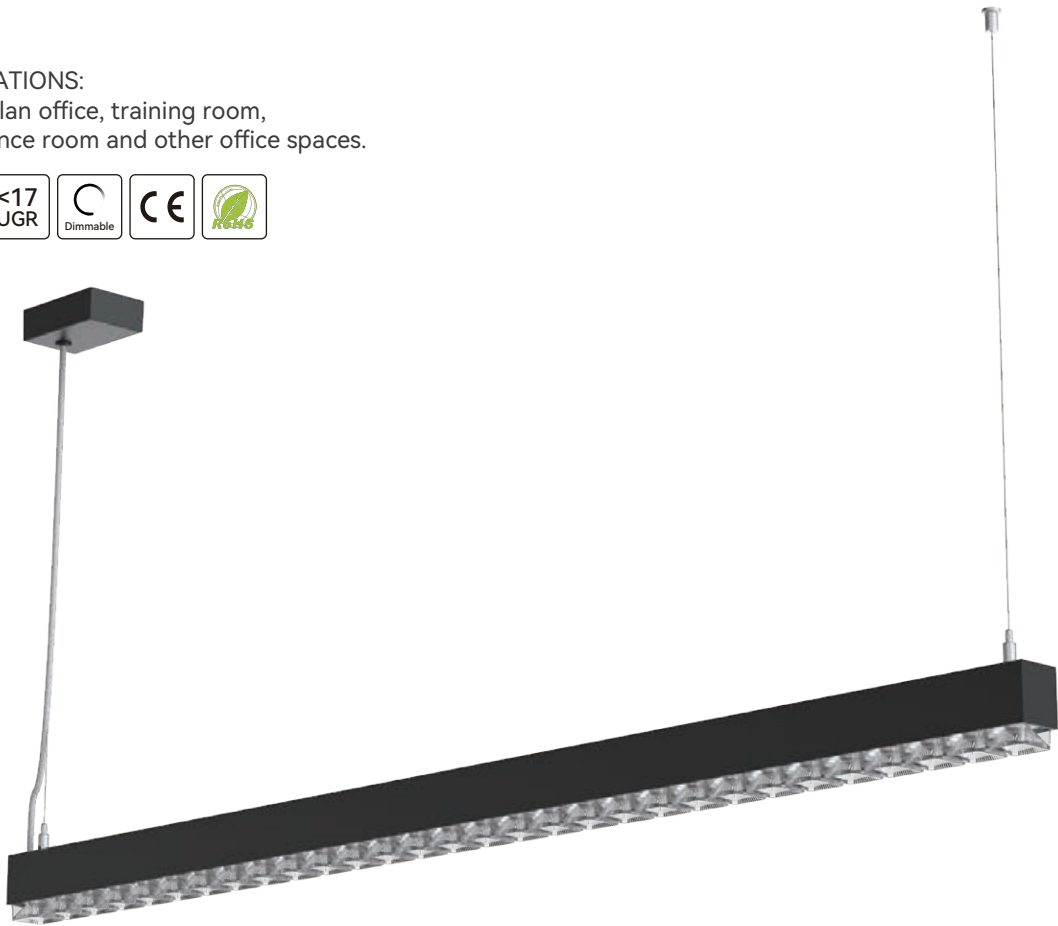

- Up to 160 lm/W for greater energy savings.
- Anti glare lens solution with side micro-light, low glare and high visual comfort
- UGR < 17, compliant with professional lighting design requirements;
- 4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;




PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	9600lm	10700lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑ 115° / 70° ↓	
UGR	<17	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BDAP1-1206024-NN	↑ 5450lm/4150lm ↓	↑ 36W/24W ↓	On/off
BDAP1-1206024-DN	↑ 5450lm/4150lm ↓	↑ 36W/24W ↓	DALI dimming
BDAP1-1507028-NN	↑ 6000lm/4700lm ↓	↑ 42W/28W ↓	On/off
BDAP1-1507028-DN	↑ 6000lm/4700lm ↓	↑ 42W/W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



Equo-P



APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



- Indirect light with 155° wide beam angle lens for uniform illumination
- Direct light with 70° wide beam angle lens and anti-glare shield design, symmetrical and well-mixed lighting effect
- CCT switchable and Wattage switchable
- Seamless linkable design with no light leakage




PRODUCT PARAMETERS

Luminaire Wattage	60W(Power switchable)	70W(Power switchable)
Luminous Flux	7800lm	9100lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑ 155° / 70° ↓	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BEQP-1206024-NN	↑ 4700lm/3100lm ↓	↑ 36W/24W ↓	On/off
BEQP-1206024-DN	↑ 4700lm/3100lm ↓	↑ 36W/24W ↓	DALI dimming
BEQP-1507028-NN	↑ 5500lm/3600lm ↓	↑ 42W/28W ↓	On/off
BEQP-1507028-DN	↑ 5500lm/3600lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE



MAYE Pro-PS




APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

130
LM/W


<19
UGR

Beam spread icon

Dimmable

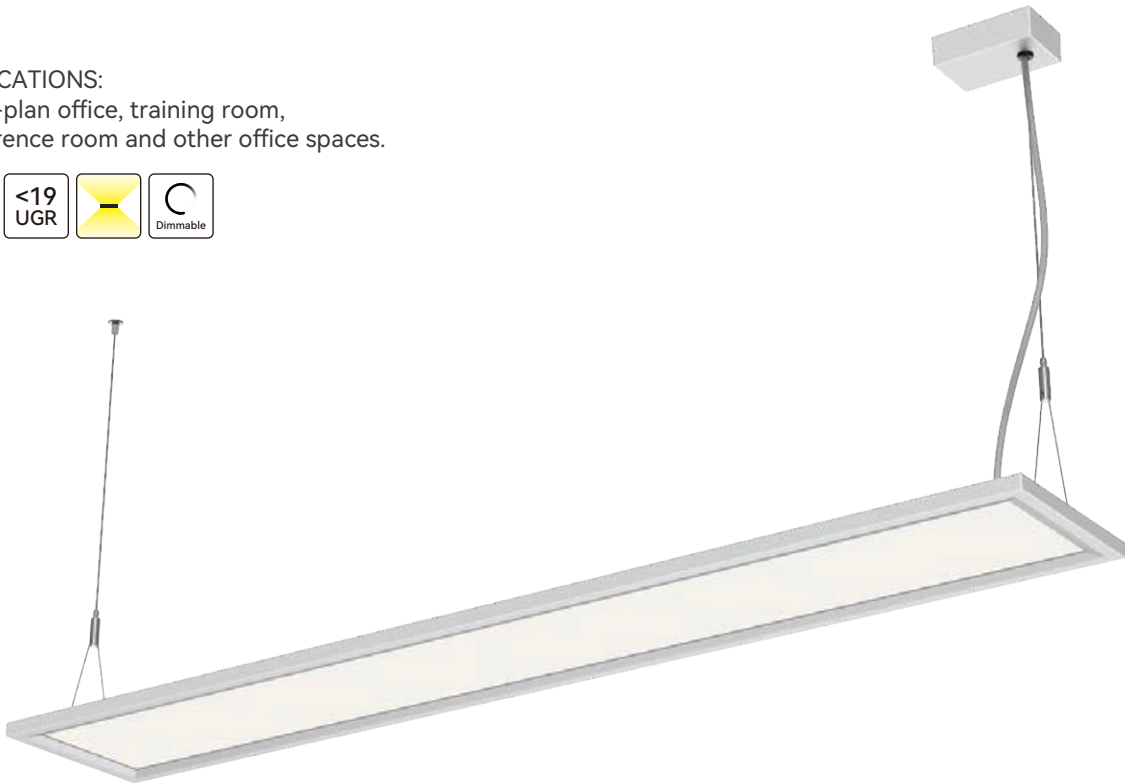

Large light-distribution
area for direct light
15mm ultra-thin
edge design



Structural polarization
design for indirect light



Support linkable
luminaires


PRODUCT PARAMETERS

Luminaire Wattage	60W	60W	70W
Luminous Flux	8400lm	8700lm	10150lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑ 110° / 80° ↓		
UGR	<16		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
BMPP-1206030-NN	↑ 5200lm/3200lm ↓	↑ 30W/30W ↓	On/off
BMPP-1206030-DN	↑ 5200lm/3200lm ↓	↑ 30W/30W ↓	DALI dimming
BMPP-1206020-NN	↑ 6650lm/2050lm ↓	↑ 40W/20W ↓	On/off
BMPP-1206020-DN	↑ 6650lm/2050lm ↓	↑ 40W/20W ↓	DALI dimming
BMPP-1507028-NN	↑ 7250lm/2900lm ↓	↑ 42W/28W ↓	On/off
BMPP-1507028-DN	↑ 7250lm/2900lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION




ROMAN-P0



APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

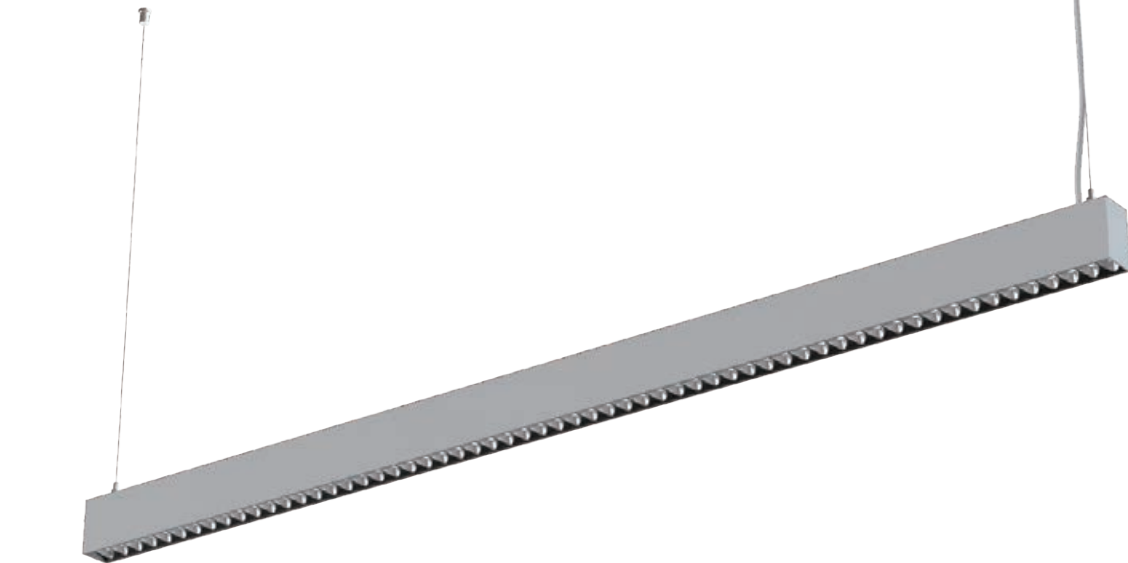

- Simple design style, rich texture
- Light efficiency up to 148lm/W
- Support DALI and 1-10V dimming

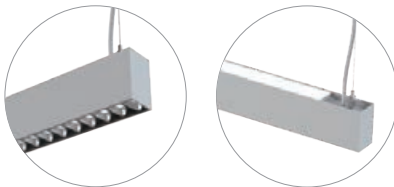


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	8910lm	10400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 60° ↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BROP0-1206024-NN	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	On/off
BROP0-1206024-VN	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	1-10V dimming
BROP0-1206024-DN	↑ 6010lm/2900lm ↓	↑ 36W/24W ↓	DALI dimming
BROP0-1507028-NN	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	On/off
BROP0-1507028-VN	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	1-10V dimming
BROP0-1507028-DN	↑ 7000lm/3400lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



ROMAN-P1



APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



- Simple design style, rich texture
- Light efficiency up to 150lm/W
- Support DALI and 1-10V dimming




PRODUCT MODEL

Part No.	LM	Power	Function
BROP1-6506024-NN	↑ 5900lm/3100lm ↓	↑ 36W/24W ↓	On/off
BROP1-6506024-VN	↑ 5900lm/3100lm ↓	↑ 36W/24W ↓	1-10V dimming
BROP1-6506024-DN	↑ 5900lm/3100lm ↓	↑ 36W/24W ↓	DALI dimming
BROP1-9008032-NN	↑ 7800lm/4200lm ↓	↑ 48W/32W ↓	On/off
BROP1-9008032-VN	↑ 7800lm/4200lm ↓	↑ 48W/32W ↓	1-10V dimming
BROP1-9008032-DN	↑ 7800lm/4200lm ↓	↑ 48W/32W ↓	DALI dimming
BROP1-1212048-NN	↑ 12000lm/6000lm ↓	↑ 72W/48W ↓	On/off
BROP1-1212048-VN	↑ 12000lm/6000lm ↓	↑ 72W/48W ↓	1-10V dimming
BROP1-1212048-DN	↑ 12000lm/6000lm ↓	↑ 72W/48W ↓	DALI dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	120W
Luminous Flux	9000lm	12000lm	18000lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑ 115° / 60° ↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / 1-10V dimming / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		

SIZE



LIGHT DISTRIBUTION



EZY-P

NEW

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



- Individual uplight module design, flexible and easy to manage inventory
- CCT switchable and Wattage switchable
- Up to 140 lm/W for greater energy savings.
- 350/450/600mm diameter available
- Pole-pendant / wire-pendant optional



LIGHT DISTRIBUTION

Luminaire Wattage	18W/ 24W	30W/ 40W	48W/ 60W
	power switchable	power switchable	power switchable
Luminous Flux	2500lm/ 3240lm	4000lm/ 5300lm	6720lm/ 8400lm
CCT	3000K / 4000K CCT switchable		
CRI	>80		
UGR	<19/ <22		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL
UGR<19

Part No.	LM	Power	Function
BEZP-3502417-NN-01	↑ 990lm/ 1510lm ↓	18W(↑ 6W ↓ /12W ↓)	On/off
BEZP-3502417-DN-01	↑ 1140lm/ 2100lm ↓	24W(↑ 7W/ 17W ↓)	DALI dimming
BEZP-4504028-NN-01	↑ 1250lm/ 2750lm ↓	30W(↑ 9W/ 21W ↓)	On/off
BEZP-4504028-DN-01	↑ 1600lm/ 3700lm ↓	40W(↑ 12W/ 28W ↓)	DALI dimming
BEZP-6006042-NN-01	↑ 1500lm/ 5220lm ↓	48W(↑ 14W/ 34W ↓)	On/off
BEZP-6006042-DN-01	↑ 2400lm/ 6000lm ↓	60W(↑ 18W/ 42W ↓)	DALI dimming


PRODUCT MODEL
UGR<22

Part No.	LM	Power	Function
BEZP-3502424-NN-01	2250lm ↓ / 3000lm ↓	18W ↓ / 24W ↓	On/off
BEZP-3502424-DN-01			DALI dimming
BEZP-4504040-NN-01	3900lm ↓ / 5200lm ↓	30W ↓ / 40W ↓	On/off
BEZP-4504040-DN-01			DALI dimming
BEZP-6006060-NN-01	6480lm ↓ / 8100lm ↓	48W ↓ / 60W ↓	On/off
BEZP-6006060-DN-01			DALI dimming

SIZE



LIGHT DISTRIBUTION



KEY-P

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



Light efficiency
could be 130LM/W


Flexible microp prism plate
Flexible diffuser

Linkable and no
light leakage


PRODUCT PARAMETERS

Luminaire Wattage	30W	40W	50W		60W	
Luminous Flux	3600lm	4800lm	6250lm	6500lm	7500lm	7800lm
CCT	3000K / 4000K / 6000K					
CRI	>80					
Protection Rating	IP20					
Longevity	50,000Hrs L80 B10					
Function	On/off / 1-10V dimming / DALI dimming					
Colours	Silver / White / Black					
Warranty	5 years					

SIZE



LIGHT DISTRIBUTION



PRODUCT MODEL

UGR: <19

Part No.	LM	Power	Function
BKEP-1205015-NN	↑ 4550lm/1950lm ↓	↑ 35W/15W ↓	On/off
BKEP-1205015-VN	↑ 4550lm/1950lm ↓	↑ 35W/15W ↓	1-10V dimming
BKEP-1205015-DN	↑ 4550lm/1950lm ↓	↑ 35W/15W ↓	DALI dimming
BKEP-1506018-NN	↑ 5460lm/2340lm ↓	↑ 42W/18W ↓	On/off
BKEP-1506018-VN	↑ 5460lm/2340lm ↓	↑ 42W/18W ↓	1-10V dimming
BKEP-1506018-DN	↑ 5460lm/2340lm ↓	↑ 42W/18W ↓	DALI dimming

UGR: >19

Part No.	LM	Power	Function
BKEP-1205030-NN	↑ 2500lm/3750lm ↓	↑ 20W/30W ↓	On/off
BKEP-1205030-VN	↑ 2500lm/3750lm ↓	↑ 20W/30W ↓	1-10V dimming
BKEP-1205030-DN	↑ 2500lm/3750lm ↓	↑ 20W/30W ↓	DALI dimming
BKEP-1506036-NN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	On/off
BKEP-1506036-VN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	1-10V dimming
BKEP-1506036-DN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	DALI dimming
BKEP-1203030-NN	3600lm ↓	30W ↓	On/off
BKEP-1203030-VN	3600lm ↓	30W ↓	1-10V dimming
BKEP-1203030-DN	3600lm ↓	30W ↓	DALI dimming
BKEP-1504040-NN	4800lm ↓	40W ↓	On/off
BKEP-1504040-VN	4800lm ↓	40W ↓	1-10V dimming
BKEP-1504040-DN	4800lm ↓	40W ↓	DALI dimming



FREE-P

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.


IP20

<19
UGR

Dimmable

CE

RoHS

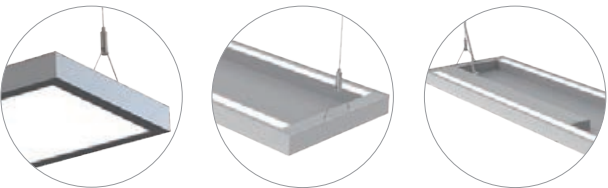

Microprism
UGR<19

Direct and indirect
lighting with impressive
light uniformity

Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6350lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BFRP-1205030-NN	↑ 2700lm/3650lm ↓	↑ 20W/30W ↓	On/off
BFRP-1205030-VN	↑ 2700lm/3650lm ↓	↑ 20W/30W ↓	1-10V dimming
BFRP-1205030-DN	↑ 2700lm/3650lm ↓	↑ 20W/30W ↓	DALI dimming
BFRP-1506036-NN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	On/off
BFRP-1506036-VN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	1-10V dimming
BFRP-1506036-DN	↑ 3000lm/4500lm ↓	↑ 24W/36W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION




ROMI-P

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



Microprism
UGR<18



Extremely simple for
installation and
maintenance



Pole suspension and
wire suspension
for option


LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BROP-3501812-NN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	On/off
BROP-3501812-VN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	1-10V dimming
BROP-3501812-DN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	DALI dimming
BROP-4503021-NN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	On/off
BROP-4503021-VN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	1-10V dimming
BROP-4503021-DN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	DALI dimming
BROP-6004834-NN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	On/off
BROP-6004834-VN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	1-10V dimming
BROP-6004834-DN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	DALI dimming
BROP-9008056-NN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	On/off
BROP-9008056-VN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	1-10V dimming
BROP-9008056-DN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION



ELFOO-P

APPLICATIONS:
Open-plan office, individual office,
cafeteria, training room, classroom, etc.

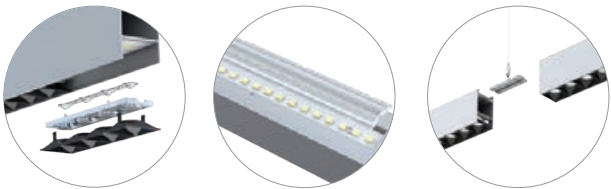

Wide beam angle with professional glare control design, UGR<15

140° upward light output to provide comfortable lighting for the space

No gap and no light come out from connection parts when linked together


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6300lm	7400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 140° / 75° ↓ or ↑ 140° / 50° ↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFP-1206024-NN	↑ 3500lm/2800lm ↓	↑ 36W/24W ↓	On/off
BEFP-1206024-VN	↑ 3500lm/2800lm ↓	↑ 36W/24W ↓	1-10V dimming
BEFP-1206024-DN	↑ 3500lm/2800lm ↓	↑ 36W/24W ↓	DALI dimming
BEFP-1507028-NN	↑ 4100lm/3300lm ↓	↑ 42W/28W ↓	On/off
BEFP-1507028-VN	↑ 4100lm/3300lm ↓	↑ 42W/28W ↓	1-10V dimming
BEFP-1507028-DN	↑ 4100lm/3300lm ↓	↑ 42W/28W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION



LENO-P2

APPLICATIONS:
Open-plan office, individual office,
small meeting room, reception, etc.

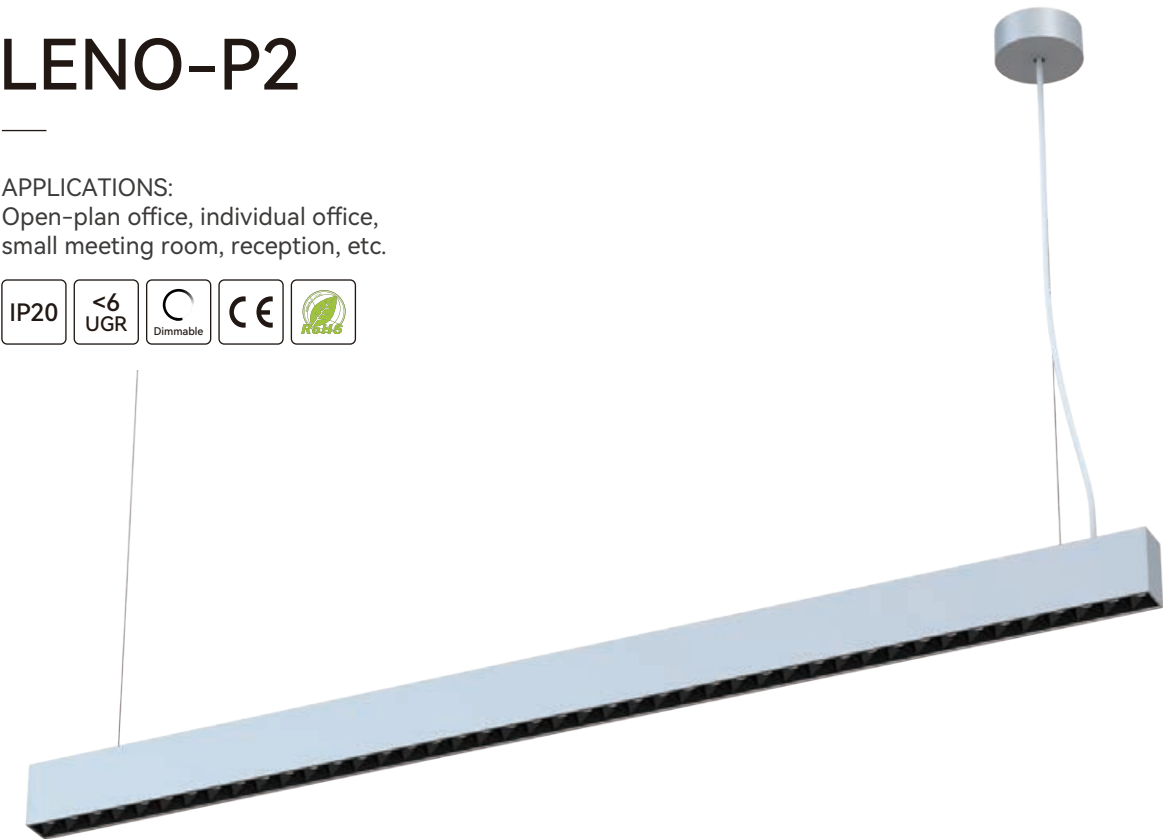

Micro reflector design UGR<6 Linkable design Support DALI and 1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6250lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑ 115° / 50° ↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEP2-1205025-NN	↑ 3350lm/2900lm ↓	↑ 25W/25W ↓	On/off
BLEP2-1205025-VN	↑ 3350lm/2900lm ↓	↑ 25W/25W ↓	1-10V dimming
BLEP2-1205025-DN	↑ 3350lm/2900lm ↓	↑ 25W/25W ↓	DALI dimming
BLEP2-1506030-NN	↑ 4000lm/3500lm ↓	↑ 30W/30W ↓	On/off
BLEP2-1506030-VN	↑ 4000lm/3500lm ↓	↑ 30W/30W ↓	1-10V dimming
BLEP2-1506030-DN	↑ 4000lm/3500lm ↓	↑ 30W/30W ↓	DALI dimming

SIZE




LIGHT DISTRIBUTION




LICON-P

APPLICATIONS:
Open-plan office, individual office,
meeting room, guestroom etc.

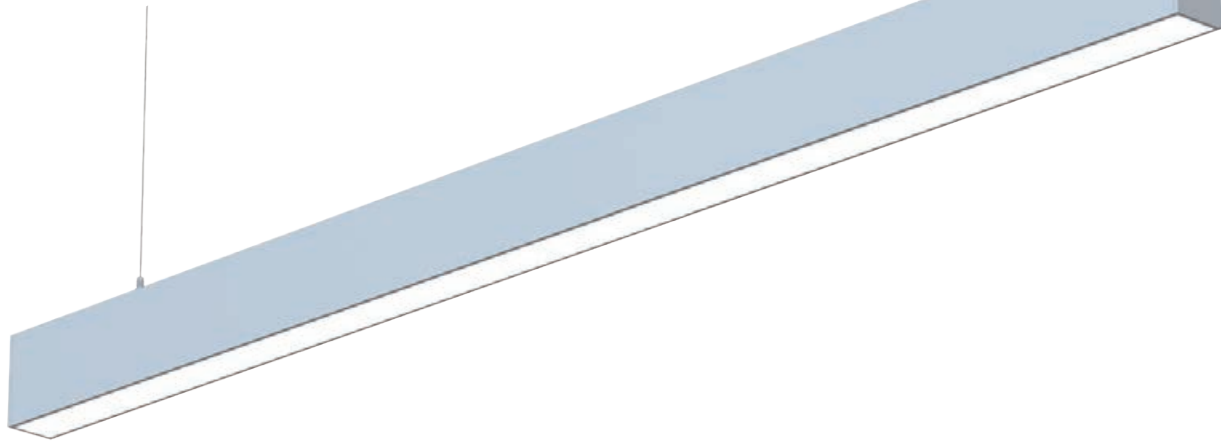

- Simple and rich textured design
- Support DALI and 1-10V dimming
- Simple, easy and quick installation

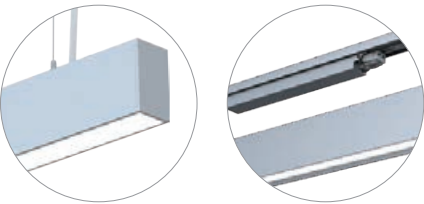


PRODUCT PARAMETERS

Luminaire Wattage	40W	48W	50W	60W
Luminous Flux	3600lm	5300lm	4500lm	6600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<21			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BLIP-1204832-NN	↑ 2400lm/2900lm ↓	↑ 16W/32W ↓	On/off
BLIP-1204832-VN	↑ 2400lm/2900lm ↓	↑ 16W/32W ↓	1-10V dimming
BLIP-1204832-DN	↑ 2400lm/2900lm ↓	↑ 16W/32W ↓	DALI dimming
BLIP-1506040-NN	↑ 3000lm/3600lm ↓	↑ 20W/40W ↓	On/off
BLIP-1506040-VN	↑ 3000lm/3600lm ↓	↑ 20W/40W ↓	1-10V dimming
BLIP-1506040-DN	↑ 3000lm/3600lm ↓	↑ 20W/40W ↓	DALI dimming
BLIP-1204040-NN	3600lm ↓	40W ↓	On/off
BLIP-1204040-VN	3600lm ↓	40W ↓	1-10V dimming
BLIP-1204040-DN	3600lm ↓	40W ↓	DALI dimming
BLIP-1505050-NN	4500lm ↓	50W ↓	On/off
BLIP-1505050-VN	4500lm ↓	50W ↓	1-10V dimming
BLIP-1505050-DN	4500lm ↓	50W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION




04


SURFACE MOUNTED LUMINAIRES

APPLICATIONS:

Open-plan office, reception,
training room, cafeteria, etc.

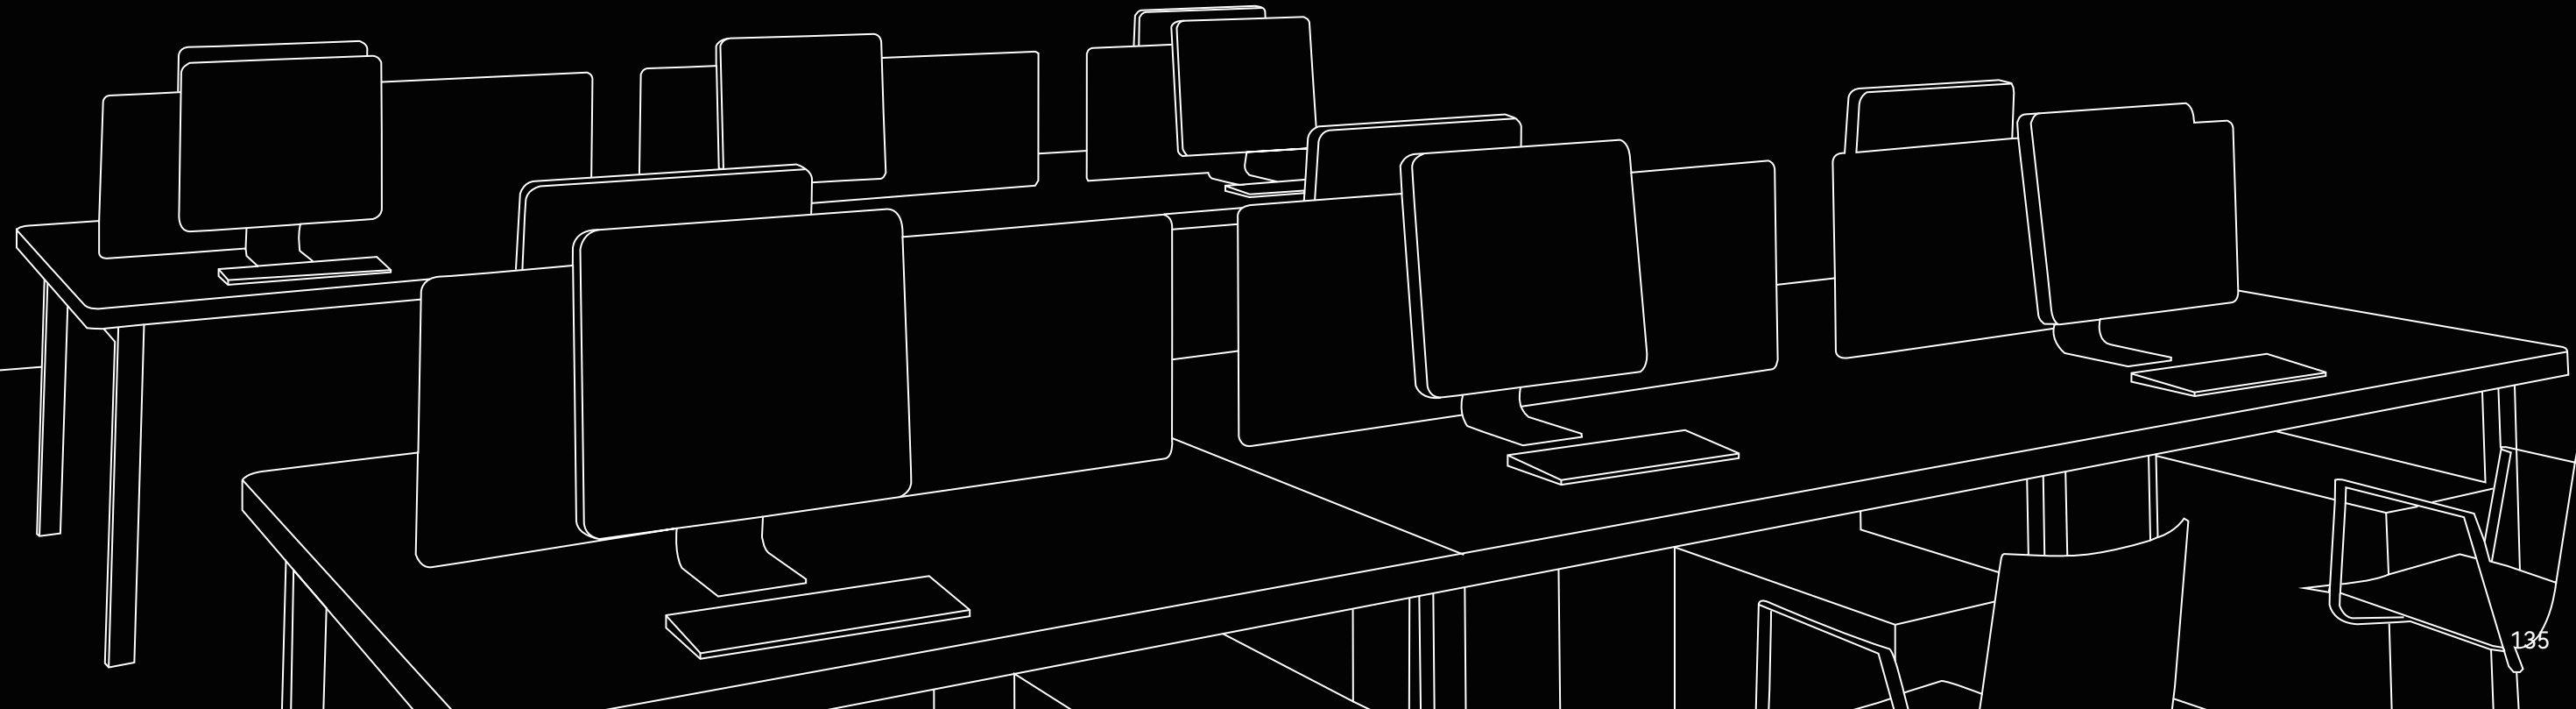

SURFACE MOUNTED LUMINAIRES



	EZY-C	KEY-C	FREE-C	ROMI-C	ELFOO-C	ELFOO-C3	LICON-C
Luminaire Wattage	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable	40W/ 50W	50W/ 60W	18W/ 30W/ 48W/ 80W	30W/ 35W	8W/ 18W	40W/ 50W
Luminous Flux	2500lm/ 3240lm 4000lm/ 5300lm 6720lm/ 8400lm	4800lm/ 6000lm	5200lm/ 6300lm	1700lm/ 3300lm/ 5760lm/ 9600lm	3200lm/ 3600lm	850lm/ 1900lm	3600lm/ 4500lm
UGR	<19/ <22	<27	<19	<18	<18	<14(35°) / <17(65°)	<21
optics	90°	90°	80°	95°	80°	35° / 65°	80°
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours							


EZY-C

NEW

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



- Individual uplight module design, flexible and easy to manage inventory.
- CCT switchable and Wattage switchable.
- Up to 140 lm/W for greater energy savings.
- 350/450/600mm diameter available.

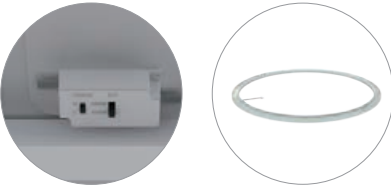

LIGHT DISTRIBUTION

Luminaire Wattage	18W/ 24W	30W/ 40W	48W/ 60W
	power switchable	power switchable	power switchable
Luminous Flux	2500lm/ 3240lm	4000lm/ 5300lm	6720lm/ 8400lm
CCT	3000K / 4000K CCT switchable		
CRI	>80		
UGR	<19/ <22		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL
UGR<19

Part No.	LM	Power	Function
BEZC-3502417-NN-01	↑ 990lm/ 1510lm ↓	18W(↑ 6W/12W ↓)	On/off
BEZC-3502417-DN-01	↑ 1140lm/ 2100lm ↓	24W(↑ 7W/ 17W ↓)	DALI dimming
BEZC-4504028-NN-01	↑ 1250lm/ 2750lm ↓	30W(↑ 9W/ 21W ↓)	On/off
BEZC-4504028-DN-01	↑ 1600lm/ 3700lm ↓	40W(↑ 12W/ 28W ↓)	DALI dimming
BEZC-6006042-NN-01	↑ 1500lm/ 5220lm ↓	48W(↑ 14W/ 34W ↓)	On/off
BEZC-6006042-DN-01	↑ 2400lm/ 6000lm ↓	60W(↑ 18W/ 42W ↓)	DALI dimming


PRODUCT MODEL
UGR<22

Part No.	LM	Power	Function
BEZC-3502424-NN-01	2250lm ↓ / 3000lm ↓	18W ↓ / 24W ↓	On/off
BEZC-3502424-DN-01			DALI dimming
BEZC-4504040-NN-01	3900lm ↓ / 5200lm ↓	30W ↓ / 40W ↓	On/off
BEZC-4504040-DN-01			DALI dimming
BEZC-6006060-NN-01	6480lm ↓ / 8100lm ↓	48W ↓ / 60W ↓	On/off
BEZC-6006060-DN-01			DALI dimming

SIZE



LIGHT DISTRIBUTION



KEY-C

NEW

APPLICATIONS:
Open-plan office, reception room,
training room, cafeteria, etc.



Light efficiency could
be 120LM/W

Flexible microprism plate

Linkable and no
light leakage


PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	4800lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL


Part No.	LM	Power	Function
BKEC-1204040-NN	4800lm	40W	On/off
BKEC-1204040-VN	4800lm	40W	1-10V dimming
BKEC-1204040-DN	4800lm	40W	DALI dimming
BKEC-1505050-NN	6000lm	50W	On/off
BKEC-1505050-VN	6000lm	50W	1-10V dimming
BKEC-1505050-DN	6000lm	50W	DALI dimming

SIZE

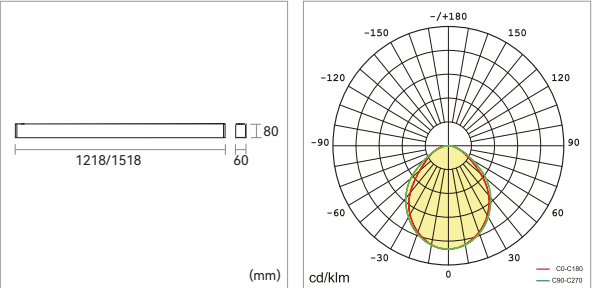

FREE-C

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

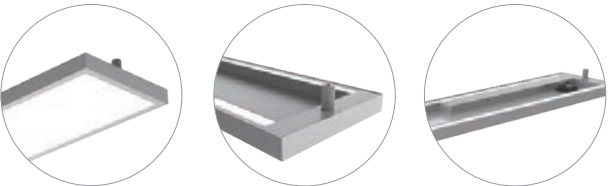

Microprism
UGR<19

Direct and Indirect
lighting with impressive
light uniformity

Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	5200lm	6300lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BFRC-1205040-NN	↑ 1300lm/3900lm ↓	↑ 10W / 40W ↓	On/off
BFRC-1205040-VN	↑ 1300lm/3900lm ↓	↑ 10W / 40W ↓	1-10V dimming
BFRC-1205040-DN	↑ 1300lm/3900lm ↓	↑ 10W / 40W ↓	DALI dimming
BFRC-1506048-NN	↑ 1500lm/4800lm ↓	↑ 12W / 48W ↓	On/off
BFRC-1506048-VN	↑ 1500lm/4800lm ↓	↑ 12W / 48W ↓	1-10V dimming
BFRC-1506048-DN	↑ 1500lm/4800lm ↓	↑ 12W / 48W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION




ROMI-C

APPLICATIONS:
Open-plan office, individual office, cafeteria,
corridors, break-out area, classroom, etc.



- Microprism, UGR<18
- Extremely simple for installation and maintenance
- Come with several size Ø350 / Ø450 / Ø600 / Ø900

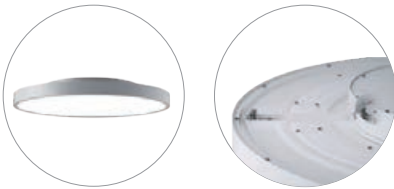


PRODUCT PARAMETERS

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BROC-3501812-NN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	On/off
BROC-3501812-VN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	1-10V dimming
BROC-3501812-DN	↑ 500lm/1200lm ↓	↑ 6W/12W ↓	DALI dimming
BROC-4503021-NN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	On/off
BROC-4503021-VN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	1-10V dimming
BROC-4503021-DN	↑ 1100lm/2200lm ↓	↑ 9W/21W ↓	DALI dimming
BROC-6004834-NN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	On/off
BROC-6004834-VN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	1-10V dimming
BROC-6004834-DN	↑ 1960lm/3800lm ↓	↑ 14W/34W ↓	DALI dimming
BROC-9008056-NN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	On/off
BROC-9008056-VN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	1-10V dimming
BROC-9008056-DN	↑ 3400lm/6200lm ↓	↑ 24W/56W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-C

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together




PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	80°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFC-1203030-NN	3200lm	30W	On/off
BEFC-1203030-VN	3200lm	30W	1-10V dimming
BEFC-1203030-DN	3200lm	30W	DALI dimming
BEFC-1503535-NN	3600lm	35W	On/off
BEFC-1503535-VN	3600lm	35W	1-10V dimming
BEFC-1503535-DN	3600lm	35W	DALI dimming

SIZE




LIGHT DISTRIBUTION




ELFOO-C3

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

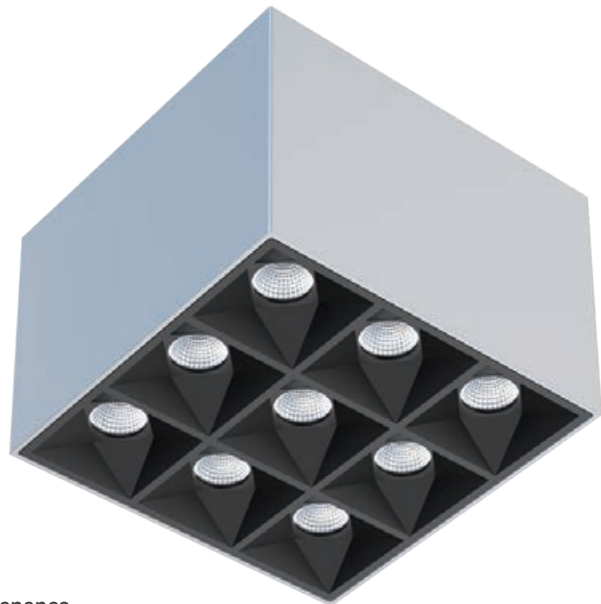

- Push-in and push-out structure, easy for installation and maintenance
- Perfect glare control, low UGR
- Support DALI and 1-10V dimming

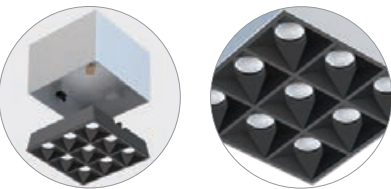


PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<14(35°) / <17(65°)	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFK-1200808-NN	850lm	8W	On/off
BEFK-1200808-VN	850lm	8W	1-10V dimming
BEFK-1200808-DN	850lm	8W	DALI dimming
BEFK-1201818-NN	1900lm	18W	On/off
BEFK-1201818-VN	1900lm	18W	1-10V dimming
BEFK-1201818-DN	1900lm	18W	DALI dimming

SIZE




LIGHT DISTRIBUTION



LICON-C

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

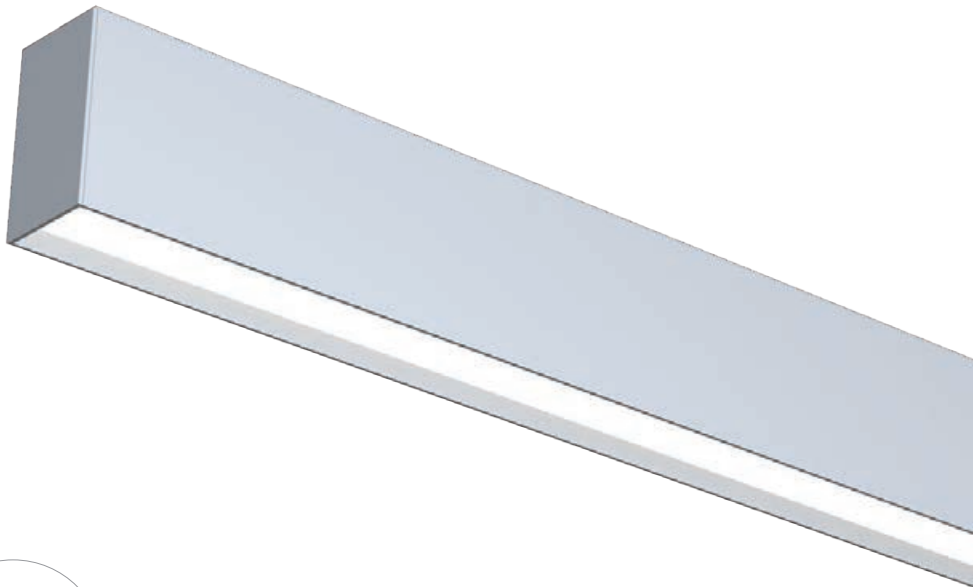

Simple and delicate design Easy for maintenance Simple, easy and quick installation


PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	3600lm	4500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<21	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLIC-1204040-NN	3600lm	40W	On/off
BLIC-1204040-VN	3600lm	40W	1-10V dimming
BLIC-1204040-DN	3600lm	40W	DALI dimming
BLIC-1505050-NN	4500lm	50W	On/off
BLIC-1505050-VN	4500lm	50W	1-10V dimming
BLIC-1505050-DN	4500lm	50W	DALI dimming

SIZE



LIGHT DISTRIBUTION




05


RECESSED LUMINAIRES

APPLICATIONS:

Open-plan office, training room,
conference room and classroom, etc.

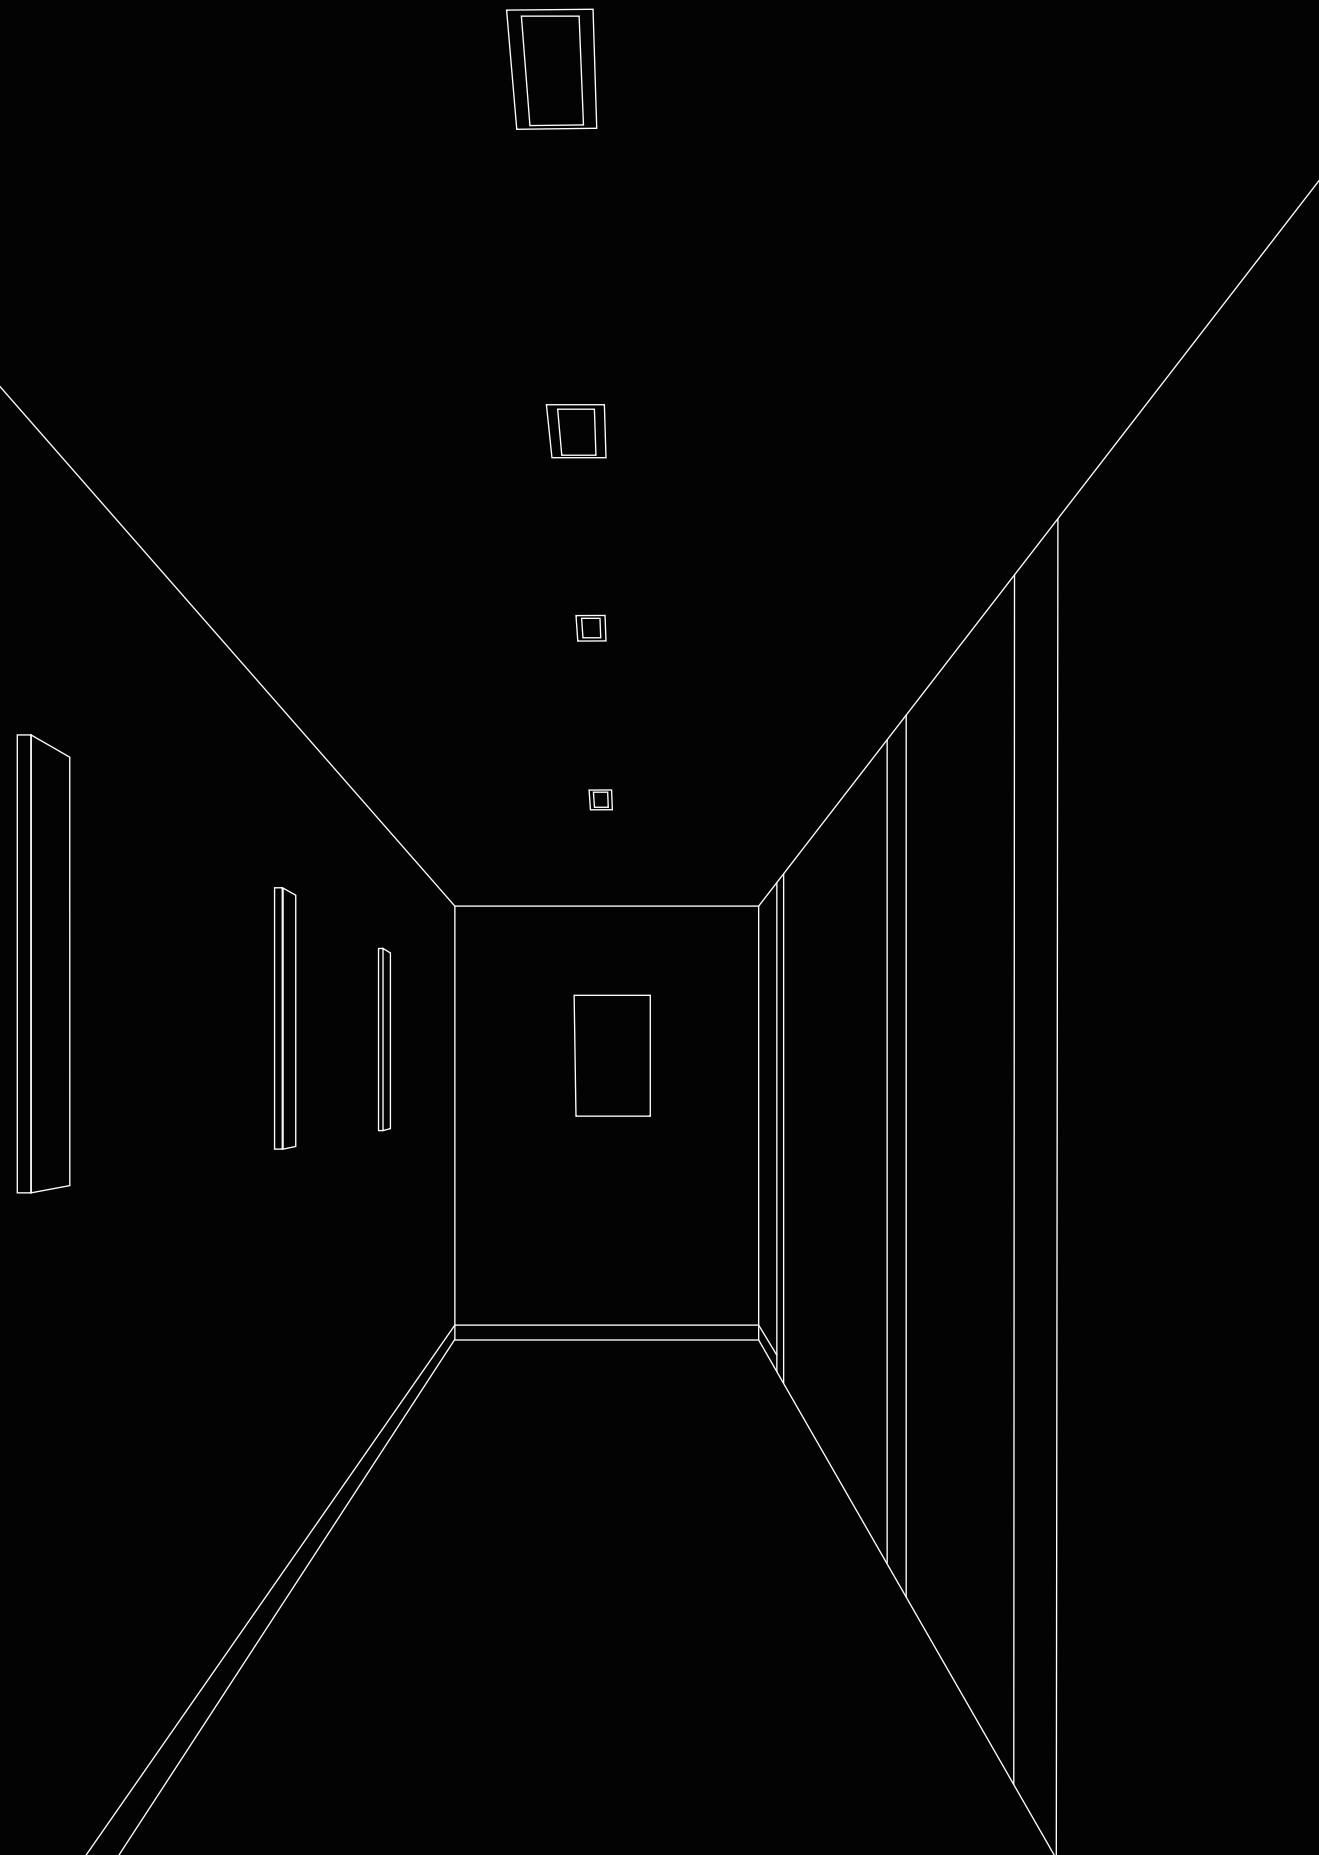

RECESSED LUMINAIRES



	EZY-R	KEY-R	ELFOO-R0	ELFOO-R1	ELFOO-D2	ELFOO-D3	ELFOO-D4	ELFOO-D5
Luminaire Wattage	15W/ 28W/ 30W/ 40W	40W/ 50W	30W/ 35W	30W/ 35W	8W/ 18W	8W/ 18W	6W	12W
Luminous Flux	1950lm/ 3920lm/ 4350lm/ 5890lm	4400lm/ 6000lm	3200lm/ 3600lm	3200lm/ 3600lm	850lm/ 1900lm	850lm/ 1900lm	778lm	1552lm
UGR	<20 / <25	<27	<18	<18	<14(35°) / <17(65°)	<14(35°) / <17(65°)	<18	<18
optics	90°	90°	75°	75°	35°/ 65°	35°/ 65°	55°	55°
CRI	>80	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours								

EZY-R NEW

APPLICATIONS:
Open-plan office, small office, meeting rooms, cafeterias,
foyers and lobbies, corridors, staircases, etc.

IP40

145
LM/W

Dimmable

CE

RoHS



Recessed round luminaire
available in 462/612mm
diameter sizes

Easy Installation and
maintenance with
complete fixture setup

Suitable for ceiling
thickness range
of 3-40mm


PRODUCT PARAMETERS

Luminaire Wattage	15W	28W	30W	40W
Luminous Flux	1950lm	3920lm	4350lm	5890lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<20		<25	
Protection Rating	IP40			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

PRODUCT MODEL


Part No.	LM	Power	Function
BEZR-4501515-NN-01	1950lm	15W	On/off
BEZR-4501515-DN-01	1950lm	15W	DALI dimming
BEZR-6002828-NN-01	3920lm	28W	On/off
BEZR-6002828-DN-01	3920lm	28W	DALI dimming
BEZR-4503030-NN	4350lm	30W	On/off
BEZR-4503030-DN	4350lm	30W	DALI dimming
BEZR-6004040-NN	5890lm	40W	On/off
BEZR-6004040-DN	5890lm	40W	DALI dimming

SIZE

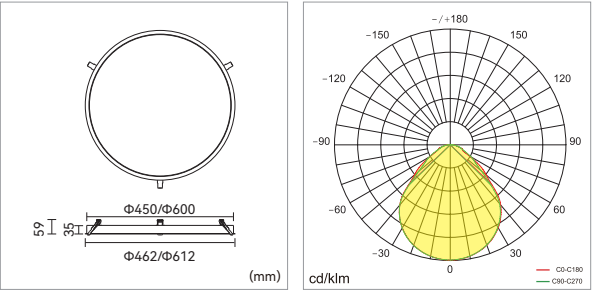

KEY-R NEW

APPLICATIONS:
Open-plan office, small office, meeting room, reception area, etc.

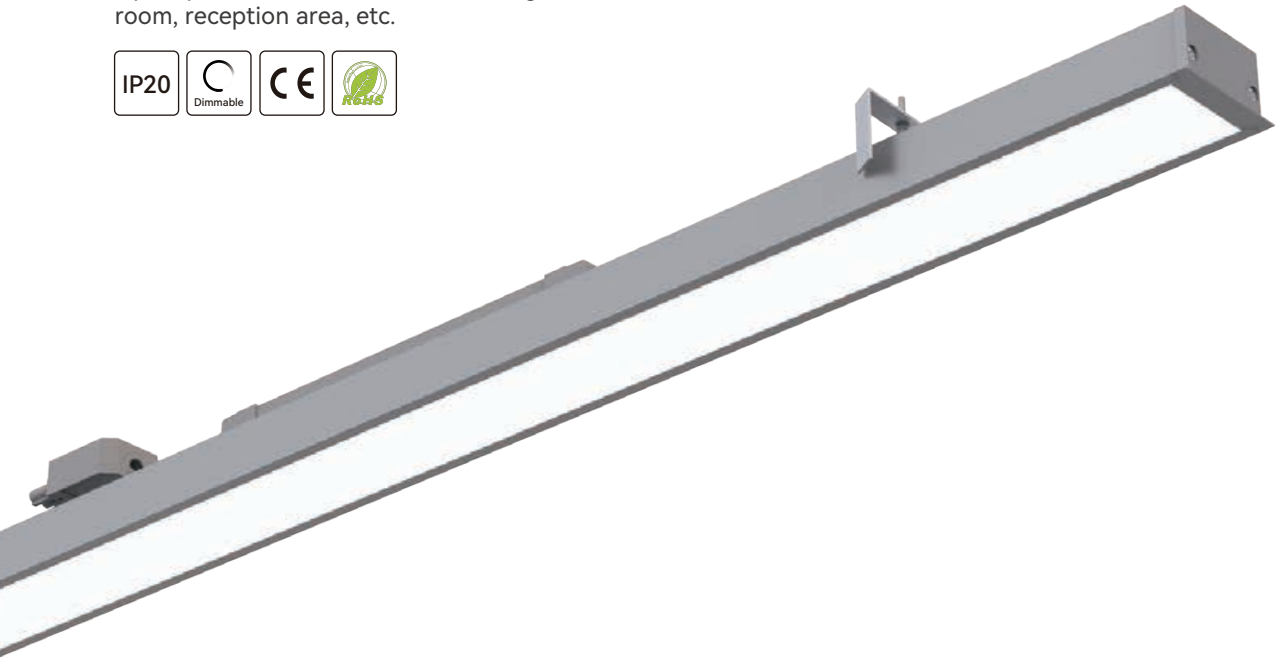

Flexible prismatic plate Support for smart control functions Linkable design solution


PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	4400lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL


Part No.	LM	Power	Function
BKEY-1204040-NN	4400lm	40W	On/off
BKEY-1204040-VN	4400lm	40W	1-10V dimming
BKEY-1204040-DN	4400lm	40W	DALI dimming
BKEY-1505050-NN	6000lm	50W	On/off
BKEY-1505050-VN	6000lm	50W	1-10V dimming
BKEY-1505050-DN	6000lm	50W	DALI dimming

SIZE

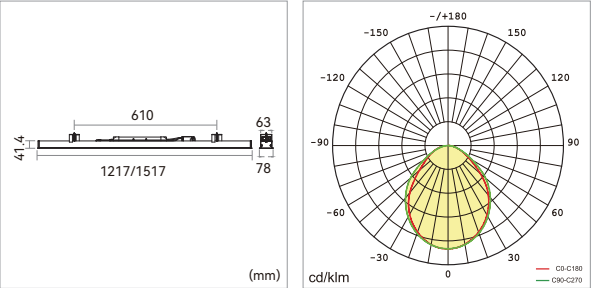


ELFOO-R0

APPLICATIONS:
Open-plan office, training room conference room and classroom, etc.

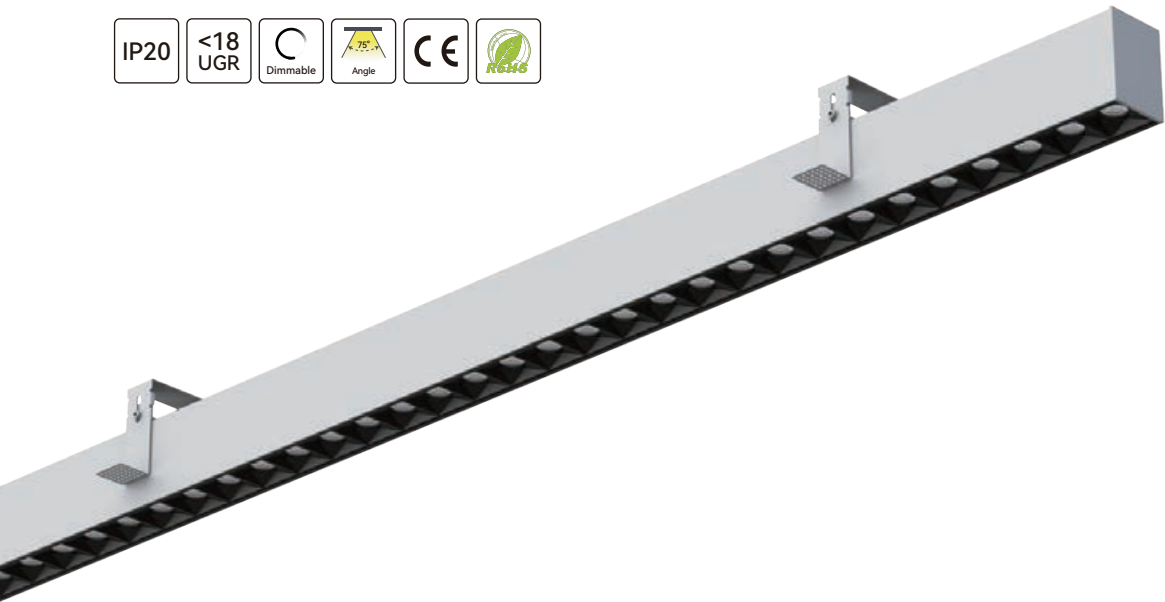

- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together
- Support for smart control functions

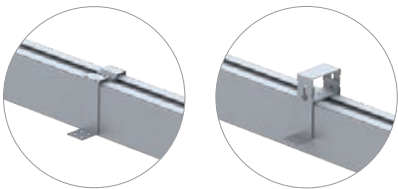


PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFX-1203030-NN	3200lm	30W	On/off
BEFX-1203030-VN	3200lm	30W	1-10V dimming
BEFX-1203030-DN	3200lm	30W	DALI dimming
BEFX-1503535-NN	3600lm	35W	On/off
BEFX-1503535-VN	3600lm	35W	1-10V dimming
BEFX-1503535-DN	3600lm	35W	DALI dimming

SIZE



LIGHT DISTRIBUTION




ELFOO-R1

APPLICATIONS:
Open-plan office, training room, conference room and classroom, etc.



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from the connection parts when linked together
- Support for smart control functions




PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFY-1203030-NN	3200lm	30W	On/off
BEFY-1203030-VN	3200lm	30W	1-10V dimming
BEFY-1203030-DN	3200lm	30W	DALI dimming
BEFY-1503535-NN	3600lm	35W	On/off
BEFY-1503535-VN	3600lm	35W	1-10V dimming
BEFY-1503535-DN	3600lm	35W	DALI dimming

SIZE




LIGHT DISTRIBUTION




ELFOO-D2

APPLICATIONS:
For office corridor, washroom, staircase, etc.



- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<14(35°) / <17(65°)	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFS-1200808-NN	850lm	8W	On/off
BEFS-1200808-VN	850lm	8W	1-10V dimming
BEFS-1200808-DN	850lm	8W	DALI dimming
BEFS-1201818-NN	1900lm	18W	On/off
BEFS-1201818-VN	1900lm	18W	1-10V dimming
BEFS-1201818-DN	1900lm	18W	DALI dimming

SIZE




LIGHT DISTRIBUTION




ELFOO-D3

APPLICATIONS:
Open-plan office, training room,
conference room and other office space.



- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<14(35°) / <17(65°)	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1400808-NN	850lm	8W	On/off
BEFQ-1400808-VN	850lm	8W	1-10V dimming
BEFQ-1400808-DN	850lm	8W	DALI dimming
BEFQ-1401818-NN	1900lm	18W	On/off
BEFQ-1401818-VN	1900lm	18W	1-10V dimming
BEFQ-1401818-DN	1900lm	18W	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-D4

APPLICATIONS:
Office corridor, washroom, staircase, etc.



- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


PRODUCT PARAMETERS

Luminaire Wattage	6W
Luminous Flux	778lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1800606-NN	778lm	6W	On/off
BEFQ-1800606-VN	778lm	6W	1-10V dimming
BEFQ-1800606-DN	778lm	6W	DALI dimming

SIZE



LIGHT DISTRIBUTION



ELFOO-D5

APPLICATIONS:
Office corridor, washroom, staircase, etc.



- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


PRODUCT PARAMETERS

Luminaire Wattage	12W
Luminous Flux	1552lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-3401212-NN	1552lm	12W	On/off
BEFQ-3401212-VN	1552lm	12W	1-10V dimming
BEFQ-3401212-DN	1552lm	12W	DALI dimming

SIZE



LIGHT DISTRIBUTION




06

WALL MOUNTED LUMINAIRES

APPLICATIONS:

Open-plan office, stairs, corridors and
other office space.

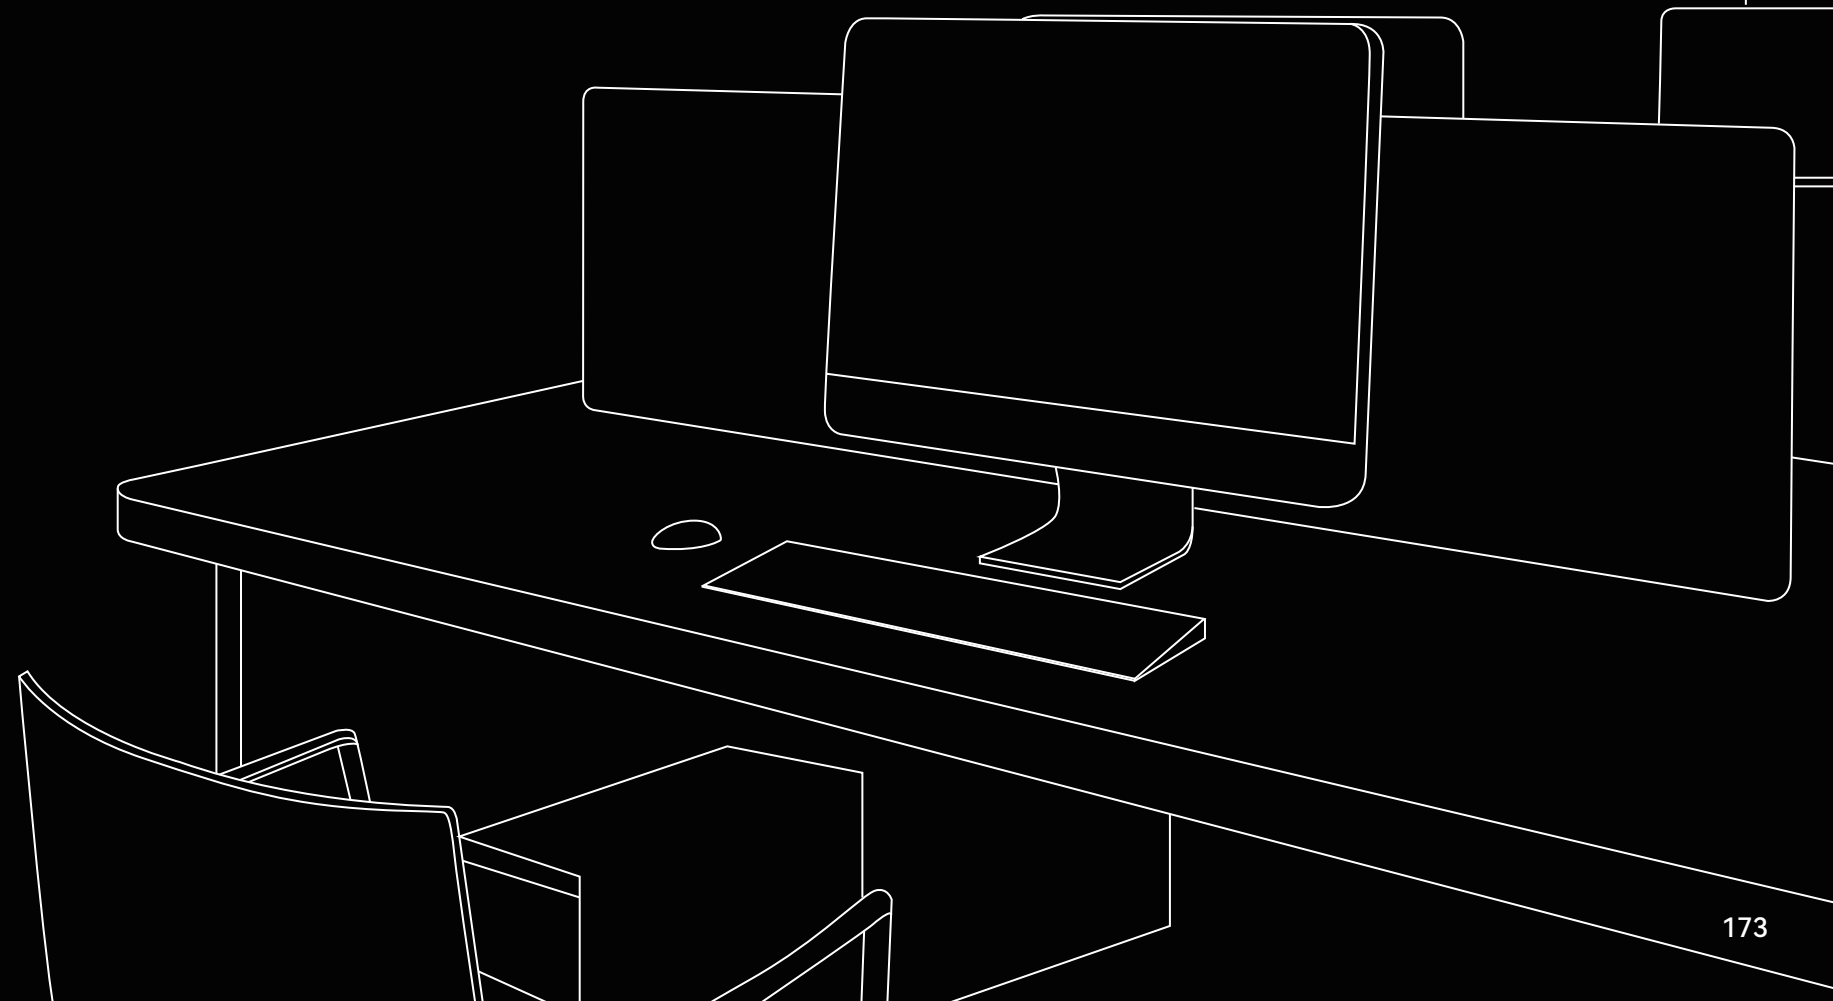

WALL MOUNTED LUMINAIRES



MAYE-WS 2.0



POD




NEWA

Luminaire Wattage	30W/ 40W Power switchable	30W/ 50W	30W/ 50W
Luminous Flux	3600lm/ 4800lm	3600lm/ 6000lm	3600lm/ 6000lm
UGR	<19	<10	<19
optics	↑ 115°/ 85° ↓	Asymmetric optics	Asymmetric optics
CRI	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K
Function	On/off / 1-10V / DALI	On/off / DALI	On/off / 1-10V / DALI
Colours			


MAYE-WS 2.0



APPLICATIONS:
Open-plan office, stairs, corridors,
lobby, break out area etc.

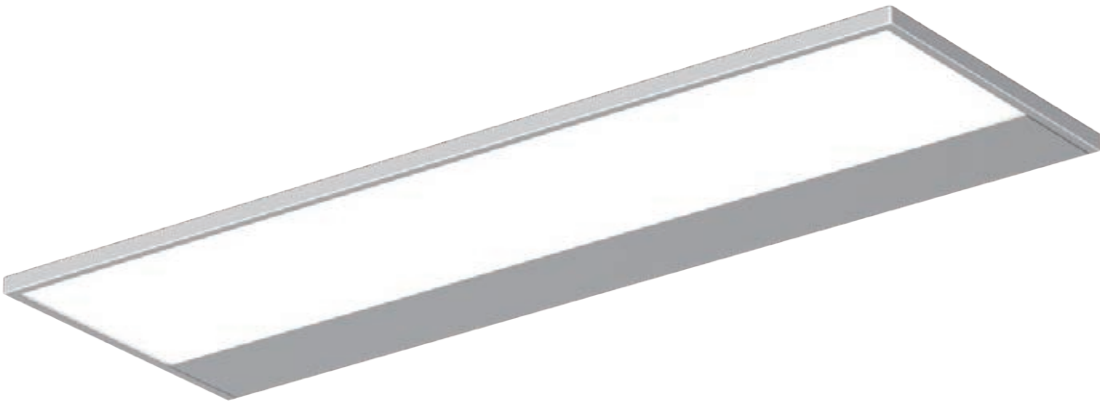

- Slim, minimalist lamp head design
- Single light guide plate achieves 60% indirect lighting & 40% direct lighting for optimal visual comfort
- CCT and Wattage switchable for flexible applications

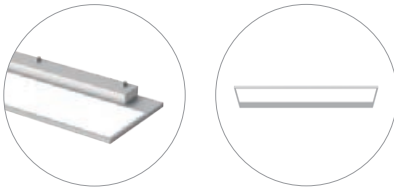


PRODUCT PARAMETER

Luminaire Wattage	40W (Power switchable)
Luminous Flux	4800 lm
CCT	3000K/4000K (CCT switchable)
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMSW-6104020-NN-01	↑ 2600lm/2200lm ↓	↑ 20W/20W ↓	On/off
BMSW-6104020-VN-01	↑ 2600lm/2200lm ↓	↑ 20W/20W ↓	1-10V dimming
BMSW-6104020-DN-01	↑ 2600lm/2200lm ↓	↑ 20W/20W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



POD



NEW

APPLICATIONS:
Open-plan office, stairs, corridors and
other office space.

IP20

<10
UGR

Dimmable

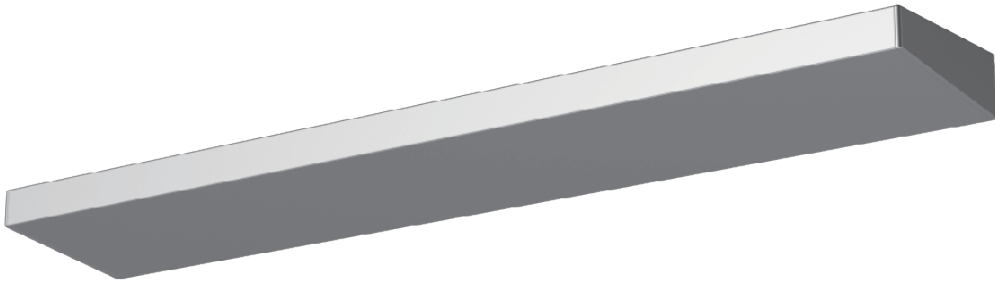


PRODUCT PARAMETERS

Luminaire Wattage	30W	50W
Luminous Flux	3600lm	6000lm
CCT	3000K / 4000K (CCT switchable)	
CRI	>80	
Optic	Asymmetric optics	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BPOW-3003000-NN	↑ 3600	↑ 30W	On/off
BPOW-3003000-DN	↑ 3600	↑ 30W	DALI dimming
BPOW-6005000-NN	↑ 6000	↑ 50W	On/off
BPOW-6005000-DN	↑ 6000	↑ 50W	DALI dimming

SIZE




NEWA

APPLICATIONS:
Open-plan office, stairs, corridors and
other office space.



- Linkable wall lamp to avoid wiring problems, one input can support 30 meters
- Both direct and indirect light can wash the wall with 650mm height, uniformity light, low glare
- Impressive easy for installation and maintenance
- High lumen efficiency, up to 120LM/W

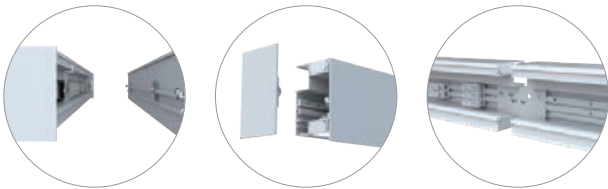


PRODUCT PARAMETER

Luminaire Wattage	30W	50W
Luminous Flux	3600lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BNEW-1203015-NN	↑ 1800lm/1800lm ↓	↑ 15W/15W ↓	On/off
BNEW-1203015-VN	↑ 1800lm/1800lm ↓	↑ 15W/15W ↓	1-10V dimming
BNEW-1203015-DN	↑ 1800lm/1800lm ↓	↑ 15W/15W ↓	DALI dimming
BNEW-1805025-NN	↑ 3000lm/3000lm ↓	↑ 25W/25W ↓	On/off
BNEW-1805025-VN	↑ 3000lm/3000lm ↓	↑ 25W/25W ↓	1-10V dimming
BNEW-1805025-DN	↑ 3000lm/3000lm ↓	↑ 25W/25W ↓	DALI dimming

SIZE



LIGHT DISTRIBUTION





ARCHITECTURE GARDEN LIGHTING

02.

BOLLARDS	185
FLOODLIGHTS	207
WALL LUMINAIRES	215
CEILING LUMINAIRES	231
WALL RECESSED LUMINAIRES	237
TABLE LAMPS	245


01

BOLLARDS

Bole is a range of high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and pc optical concept, sophisticated surface finish gives a high-end appearance of texture. Thanks to perfect powder coating, our bollards have TUV C5 certificates for tough weather conditions, resistance seawater resistance.

Bole range is available in Round/ Square/ Mushroom designs, and each design has 250mm, 600mm, 1000mm BOLE reaches 10 meters. 1000mm BOLE The professional optical solution offers a fully anti-glare and comfortable light uniformity, reaches 10 meters diameter wide light distribution but with a very narrow dark zone under the fixture. Support for smart control such as DALI2, bluetooth, CAMSAMBI, SWARM, HCL, etc.

Main applications in architectural buildings including commercial buildings, corporate headquarters, parks, recreational areas and gardens.

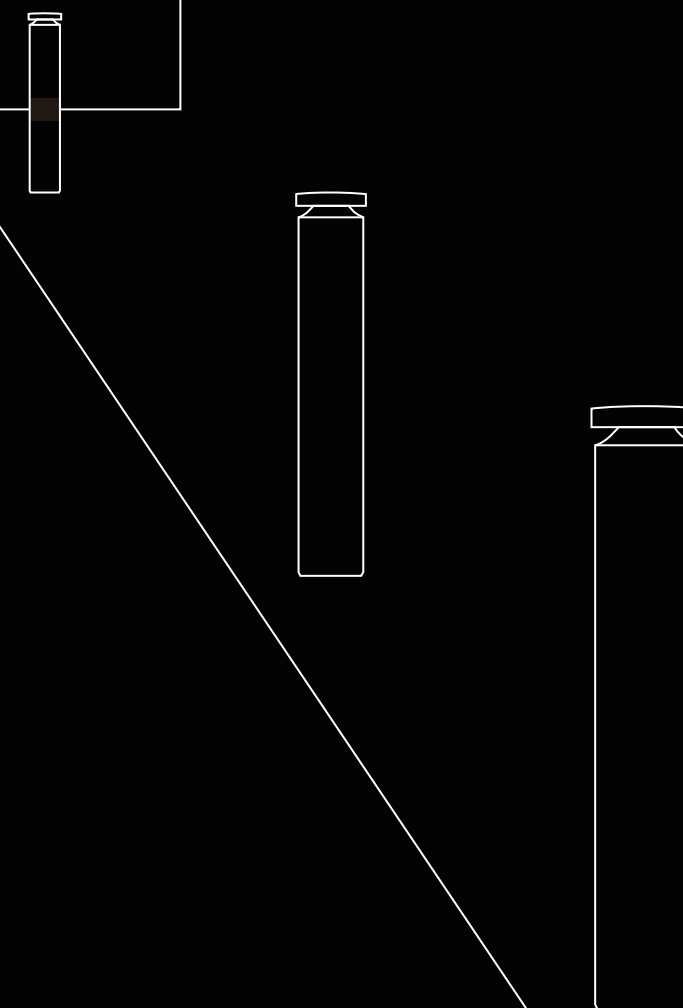

BOLLARDS



SHOW-L



PEGO



BUTTON-L



BOLE-M



BOLE-R



BOLE-S



BOLE-U

Luminaire Wattage	5W/ 12W	5W	6.5W/ 12W	6.5W/ 12W	12W/ 24W	12W/ 24W	10W/ 24W
Luminous Flux	450lm/ 1080lm	450lm	550lm/ 1050lm	324lm/ 736lm	1124lm/ 498lm	1162lm/ 505lm	907lm/ 2087lm
DarkSky	B1 U0 G1	B0 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G0
optics	180°	180°	360°	360°	360°/ 180°	360°/ 270°/ 180°	360°
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / DALI	On/off	On/off	On/off	On/off/ DAIL/ Wireless	On/off/ DAIL/ Wireless	On/off
Sensor	Motion sensor	No	No	No	Radar Sensor	Radar Sensor	No
Colours							

SHOW-L



APPLICATIONS:
Courtyards, gardens, and park pathways. Commercial buildings, corporate headquarters, and public leisure areas, etc.



- Illumination span: 8m(length)×4m(width) per unit;
- 60° wide-angle asymmetric optics deliver extensive coverage and excellent uniformity;
- Full cutoff design, DarkSky approval;
- 1,400hrs salt spray test passed




SHOW-L1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH1-10280-NN	1080lm	12W	2700K	On/off	No
B1SH1-10380-NN	1080lm	12W	3000K	On/off	No
B1SH1-10580-NN	1080lm	12W	4000K	On/off	No
B1SH1-10280-DN	1080lm	12W	2700K	DALI	No
B1SH1-10380-DN	1080lm	12W	3000K	DALI	No
B1SH1-10580-DN	1080lm	12W	4000K	DALI	No
B1SH1-10280-DM	1080lm	12W	2700K	DALI	Motion sensor
B1SH1-10380-DM	1080lm	12W	3000K	DALI	Motion sensor
B1SH1-10580-DM	1080lm	12W	4000K	DALI	Motion sensor

SIZE



LIGHT DISTRIBUTION

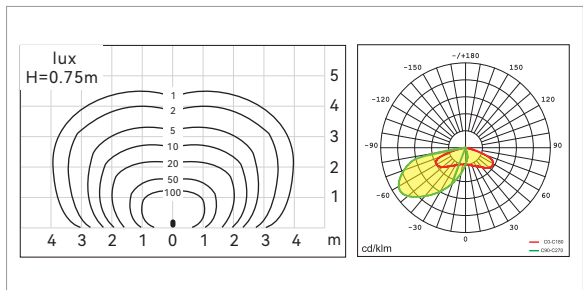


SHOW-L0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH0-05280-NN	450lm	5W	2700K	On/off	No
B1SH0-05380-NN	450lm	5W	3000K	On/off	No
B1SH0-05580-NN	450lm	5W	4000K	On/off	No
B1SH0-05280-DN	450lm	5W	2700K	On/off	No
B1SH0-05380-DN	450lm	5W	3000K	On/off	No
B1SH0-05580-DN	450lm	5W	4000K	On/off	No
B1SH0-05280-DM	450lm	5W	2700K	On/off	Motion sensor
B1SH0-05380-DM	450lm	5W	3000K	On/off	Motion sensor
B1SH0-05580-DM	450lm	5W	4000K	On/off	Motion sensor

SIZE



LIGHT DISTRIBUTION

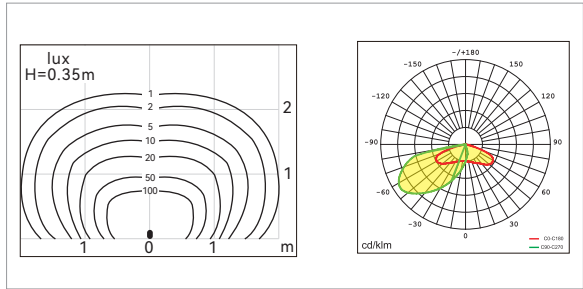


PEGO

NEW

APPLICATIONS:
Courtyards, gardens, and park pathways. Commercial buildings, corporate headquarters, and public leisure areas, etc.



- Asymmetric optics lens design, 7m(length)X3m(width) extensive coverage, excellent uniformity
- Full cutoff design, DarkSky approval
- Sleek and compact design with two height options
- 1,400hrs salt spray test

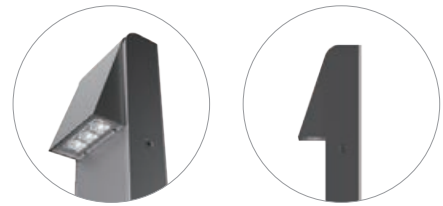


PEGO


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE1-05280-NN	450lm	5W	2700K	On/off	No
B1PE1-05380-NN	450lm	5W	3000K	On/off	No
B1PE1-05580-NN	450lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

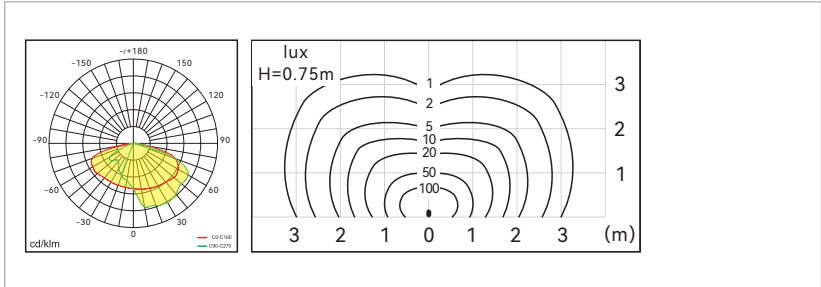

SIZE




PEGO


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE0-05280-NN	450lm	5W	2700K	On/off	No
B1PE0-05380-NN	450lm	5W	3000K	On/off	No
B1PE0-05580-NN	450lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

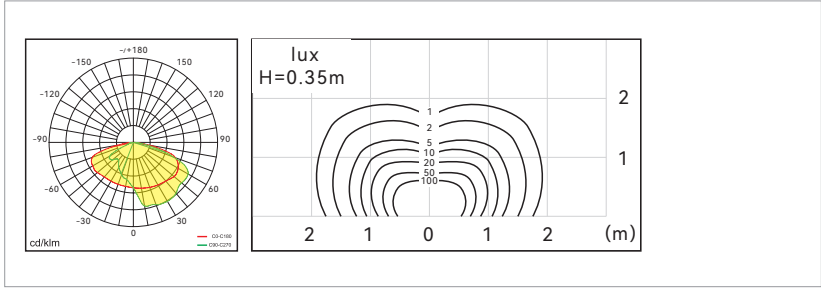

SIZE



BUTTON-L

NEW

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.



- Large angle light distribution
- No glare, long range, uniform light
- Small size




BUTTON-L1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL1-12280-NN	1050lm	12W	2700K	On/off
B1TL1-12380-NN	1050lm	12W	3000K	On/off
B1TL1-12580-NN	1050lm	12W	4000K	On/off
B1TL1-12280-DN	1050lm	12W	2700K	DALI
B1TL1-12380-DN	1050lm	12W	3000K	DALI
B1TL1-12580-DN	1050lm	12W	4000K	DALI

SIZE



LIGHT DISTRIBUTION

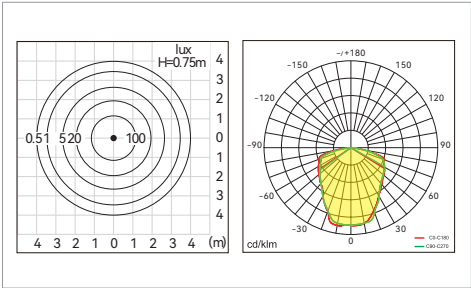


BUTTON-L0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL0-06280-NN	550lm	6.5W	2700K	On/off
B1TL0-06380-NN	550lm	6.5W	3000K	On/off
B1TL0-06580-NN	550lm	6.5W	4000K	On/off
B1TL0-06280-DN	550lm	6.5W	2700K	DALI
B1TL0-06380-DN	550lm	6.5W	3000K	DALI
B1TL0-06580-DN	550lm	6.5W	4000K	DALI

SIZE



LIGHT DISTRIBUTION

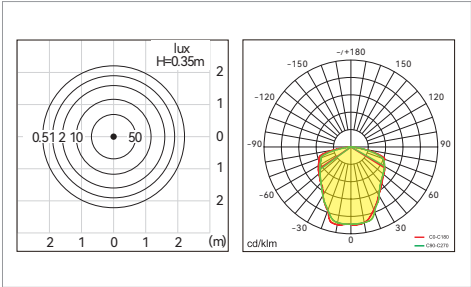

BOLE-M



APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.



- No glare/Light emission 360°
- No glare, long range, uniform light




BOLE-M1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM1-12280-NN	736lm	12W	2700K	On/off
B1BM1-12380-NN	736lm	12W	3000K	On/off
B1BM1-12580-NN	736lm	12W	4000K	On/off
B1BM1-12280-DN	736lm	12W	2700K	DALI
B1BM1-12380-DN	736lm	12W	3000K	DALI
B1BM1-12580-DN	736lm	12W	4000K	DALI

SIZE



LIGHT DISTRIBUTION

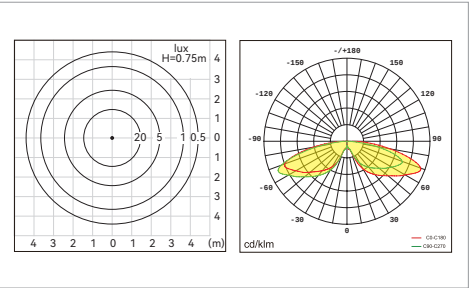


BOLE-M0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM0-06280-NN	324lm	6.5W	2700K	On/off
B1BM0-06380-NN	324lm	6.5W	3000K	On/off
B1BM0-06580-NN	324lm	6.5W	4000K	On/off
B1BM0-06280-DN	324lm	6.5W	2700K	DALI
B1BM0-06380-DN	324lm	6.5W	3000K	DALI
B1BM0-06580-DN	324lm	6.5W	4000K	DALI

SIZE




LIGHT DISTRIBUTION

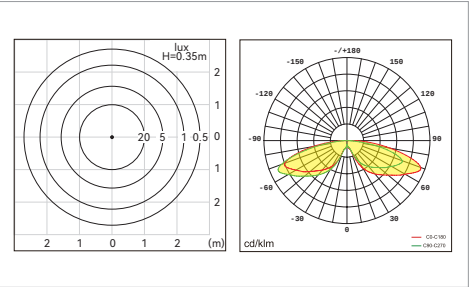

BOLE-R

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

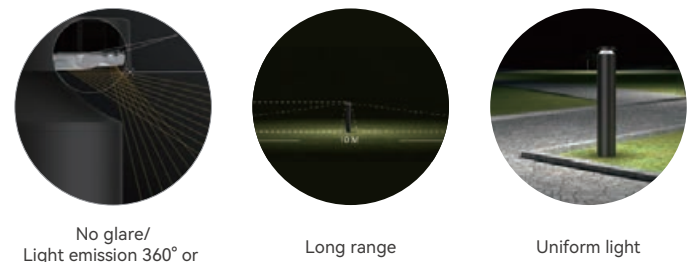

BOLE-R2


PRODUCT MODEL
Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR2-24280-NN	1124lm	24W	2700K	On/off
B1BR2-24280-DN	1124lm	24W	2700K	Dail 2
B1BR2-24280-WM	1124lm	24W	2700K	Wireless
B1BR2-24380-NN	1124lm	24W	3000K	On/off
B1BR2-24380-DN	1124lm	24W	3000K	Dail 2
B1BR2-24380-WM	1124lm	24W	3000K	Wireless
B1BR2-24580-NN	1124lm	24W	4000K	On/off
B1BR2-24580-DN	1124lm	24W	4000K	Dail 2
B1BR2-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR5-24280-NN	470lm	12W	2700K	On/off
B1BR5-24280-DN	470lm	12W	2700K	Dail 2
B1BR5-24280-WM	470lm	12W	2700K	Wireless
B1BR5-24380-NN	470lm	12W	3000K	On/off
B1BR5-24380-DN	470lm	12W	3000K	Dail 2
B1BR5-24380-WM	470lm	12W	3000K	Wireless
B1BR5-24580-NN	470lm	12W	4000K	On/off
B1BR5-24580-DN	470lm	12W	4000K	Dail 2
B1BR5-24580-WM	470lm	12W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

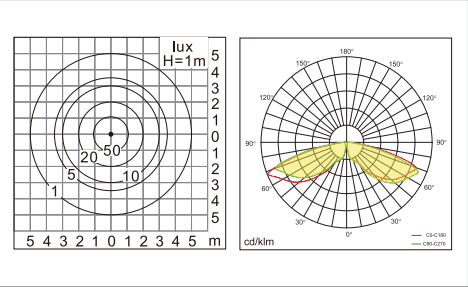

BOLE-R1


PRODUCT MODEL
Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR1-24280-NN	1124lm	24W	2700K	On/off
B1BR1-24280-DN	1124lm	24W	2700K	Dail 2
B1BR1-24280-WM	1124lm	24W	2700K	Wireless
B1BR1-24380-NN	1124lm	24W	3000K	On/off
B1BR1-24380-DN	1124lm	24W	3000K	Dail 2
B1BR1-24380-WM	1124lm	24W	3000K	Wireless
B1BR1-24580-NN	1124lm	24W	4000K	On/off
B1BR1-24580-DN	1124lm	24W	4000K	Dail 2
B1BR1-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR4-24280-NN	470lm	12W	2700K	On/off
B1BR4-24280-DN	470lm	12W	2700K	Dail 2
B1BR4-24280-WM	470lm	12W	2700K	Wireless
B1BR4-24380-NN	470lm	12W	3000K	On/off
B1BR4-24380-DN	470lm	12W	3000K	Dail 2
B1BR4-24380-WM	470lm	12W	3000K	Wireless
B1BR4-24580-NN	470lm	12W	4000K	On/off
B1BR4-24580-DN	470lm	12W	4000K	Dail 2
B1BR4-24580-WM	470lm	12W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

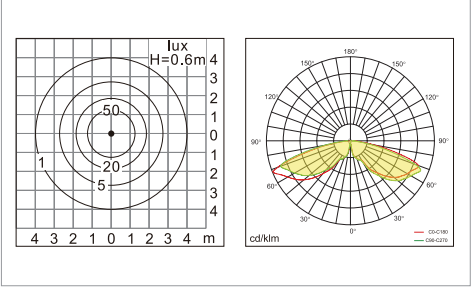

BOLE-R0

PRODUCT MODEL


Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR0-12280-NN	498lm	12W	2700K	On/off
B1BR0-12280-DN	498lm	12W	2700K	Dail 2
B1BR0-12380-NN	498lm	12W	3000K	On/off
B1BR0-12380-DN	498lm	12W	3000K	Dail 2
B1BR0-12580-NN	498lm	12W	4000K	On/off
B1BR0-12580-DN	498lm	12W	4000K	Dail 2
B1BR0-24280-NN	1124lm	24W	2700K	On/off
B1BR0-24280-DN	1124lm	24W	2700K	Dail 2
B1BR0-24380-NN	1124lm	24W	3000K	On/off
B1BR0-24380-DN	1124lm	24W	3000K	Dail 2
B1BR0-24580-NN	1124lm	24W	4000K	On/off
B1BR0-24580-DN	1124lm	24W	4000K	Dail 2


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR3-12280-NN	470lm	12W	2700K	On/off
B1BR3-12280-DN	470lm	12W	2700K	Dail 2
B1BR3-12380-NN	470lm	12W	3000K	On/off
B1BR3-12380-DN	470lm	12W	3000K	Dail 2
B1BR3-12580-NN	470lm	12W	4000K	On/off
B1BR3-12580-DN	470lm	12W	4000K	Dail 2

SIZE



LIGHT DISTRIBUTION

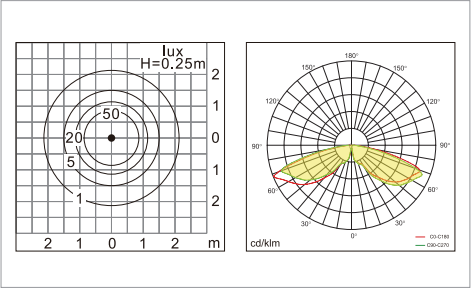

BOLE-S

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.



- No glare/Light emission 360° or optionally 270°or optionally 180°
- No glare, long range, uniform light



BOLE-S2

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS2-24280-NN	1162lm	24W	2700K	On/off
B1BS2-24280-DN	1162lm	24W	2700K	Dail 2
B1BS2-24280-WM	1162lm	24W	2700K	Wireless
B1BS2-24380-NN	1162lm	24W	3000K	On/off
B1BS2-24380-DN	1162lm	24W	3000K	Dail 2
B1BS2-24380-WM	1162lm	24W	3000K	Wireless
B1BS2-24580-NN	1162lm	24W	4000K	On/off
B1BS2-24580-DN	1162lm	24W	4000K	Dail 2
B1BS2-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS5-24280-NN	960lm	24W	2700K	On/off
B1BS5-24280-DN	960lm	24W	2700K	Dail 2
B1BS5-24280-WM	960lm	24W	2700K	Wireless
B1BS5-24380-NN	960lm	24W	3000K	On/off
B1BS5-24380-DN	960lm	24W	3000K	Dail 2
B1BS5-24380-WM	960lm	24W	3000K	Wireless
B1BS5-24580-NN	960lm	24W	4000K	On/off
B1BS5-24580-DN	960lm	24W	4000K	Dail 2
B1BS5-24580-WM	960lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS8-24280-NN	890lm	24W	2700K	On/off
B1BS8-24280-DN	890lm	24W	2700K	Dail 2
B1BS8-24280-WM	890lm	24W	2700K	Wireless
B1BS8-24380-NN	890lm	24W	3000K	On/off
B1BS8-24380-DN	890lm	24W	3000K	Dail 2
B1BS8-24380-WM	890lm	24W	3000K	Wireless
B1BS8-24580-NN	890lm	24W	4000K	On/off
B1BS8-24580-DN	890lm	24W	4000K	Dail 2
B1BS8-24580-WM	890lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

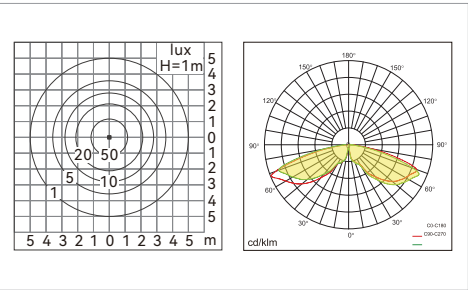

BOLE-S1

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS1-24280-NN	1162lm	24W	2700K	On/off
B1BS1-24280-DN	1162lm	24W	2700K	Dail 2
B1BS1-24280-WM	1162lm	24W	2700K	Wireless
B1BS1-24380-NN	1162lm	24W	3000K	On/off
B1BS1-24380-DN	1162lm	24W	3000K	Dail 2
B1BS1-24380-WM	1162lm	24W	3000K	Wireless
B1BS1-24580-NN	1162lm	24W	4000K	On/off
B1BS1-24580-DN	1162lm	24W	4000K	Dail 2
B1BS1-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS4-24280-NN	960lm	24W	2700K	On/off
B1BS4-24280-DN	960lm	24W	2700K	Dail 2
B1BS4-24280-WM	960lm	24W	2700K	Wireless
B1BS4-24380-NN	960lm	24W	3000K	On/off
B1BS4-24380-DN	960lm	24W	3000K	Dail 2
B1BS4-24380-WM	960lm	24W	3000K	Wireless
B1BS4-24580-NN	960lm	24W	4000K	On/off
B1BS4-24580-DN	960lm	24W	4000K	Dail 2
B1BS4-24580-WM	960lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS7-24280-NN	890lm	24W	2700K	On/off
B1BS7-24280-DN	890lm	24W	2700K	Dail 2
B1BS7-24280-WM	890lm	24W	2700K	Wireless
B1BS7-24380-NN	890lm	24W	3000K	On/off
B1BS7-24380-DN	890lm	24W	3000K	Dail 2
B1BS7-24380-WM	890lm	24W	3000K	Wireless
B1BS7-24580-NN	890lm	24W	4000K	On/off
B1BS7-24580-DN	890lm	24W	4000K	Dail 2
B1BS7-24580-WM	890lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

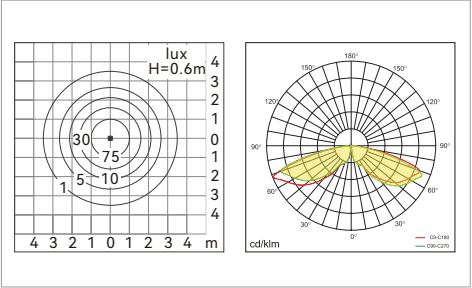

BOLE-S0

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS0-12280-NN	505lm	12W	2700K	On/off
B1BS0-12280-DN	505lm	12W	2700K	Dail 2
B1BS0-12380-NN	505lm	12W	3000K	On/off
B1BS0-12380-DN	505lm	12W	3000K	Dail 2
B1BS0-12580-NN	505lm	12W	4000K	On/off
B1BS0-12580-DN	505lm	12W	4000K	Dail 2
B1BS0-24280-NN	1162lm	24W	2700K	On/off
B1BS0-24280-DN	1162lm	24W	2700K	Dail 2
B1BS0-24380-NN	1162lm	24W	3000K	On/off
B1BS0-24380-DN	1162lm	24W	3000K	Dail 2
B1BS0-24580-NN	1162lm	24W	4000K	On/off
B1BS0-24580-DN	1162lm	24W	4000K	Dail 2


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS3-12280-NN	505lm	12W	2700K	On/off
B1BS3-12280-DN	505lm	12W	2700K	Dail 2
B1BS3-12380-NN	505lm	12W	3000K	On/off
B1BS3-12380-DN	505lm	12W	3000K	Dail 2
B1BS3-12580-NN	505lm	12W	4000K	On/off
B1BS3-12580-DN	505lm	12W	4000K	Dail 2
B1BS3-24280-NN	960lm	24W	2700K	On/off
B1BS3-24280-DN	960lm	24W	2700K	Dail 2
B1BS3-24380-NN	960lm	24W	3000K	On/off
B1BS3-24380-DN	960lm	24W	3000K	Dail 2
B1BS3-24580-NN	960lm	24W	4000K	On/off
B1BS3-24580-DN	960lm	24W	4000K	Dail 2


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS6-12280-NN	450lm	12W	2700K	On/off
B1BS6-12280-DN	450lm	12W	2700K	Dail 2
B1BS6-12380-NN	450lm	12W	3000K	On/off
B1BS6-12380-DN	450lm	12W	3000K	Dail 2
B1BS6-12580-NN	450lm	12W	4000K	On/off
B1BS6-12580-DN	450lm	12W	4000K	Dail 2
B1BS6-24280-NN	890lm	24W	2700K	On/off
B1BS6-24280-DN	890lm	24W	2700K	Dail 2
B1BS6-24380-NN	890lm	24W	3000K	On/off
B1BS6-24380-DN	890lm	24W	3000K	Dail 2
B1BS6-24580-NN	890lm	24W	4000K	On/off
B1BS6-24580-DN	890lm	24W	4000K	Dail 2

SIZE



LIGHT DISTRIBUTION

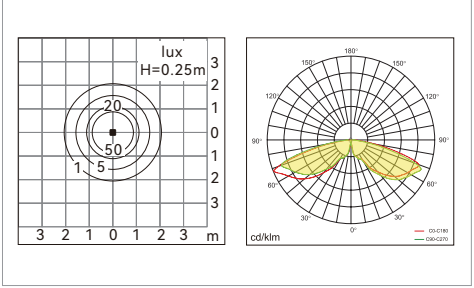


BOLE-U

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.



- No glare/Light emission 360°
- No glare, long range, uniform light

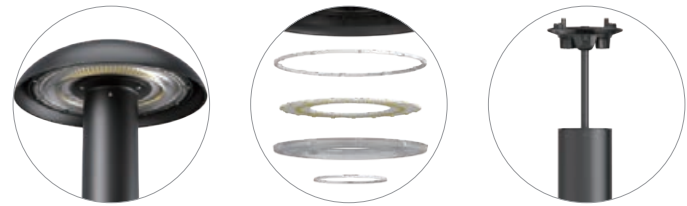


BOLE-U2


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU2-24280-NN	2087lm	24W	2700K	On/off
B1BU2-24380-NN	2087lm	24W	3000K	On/off
B1BU2-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

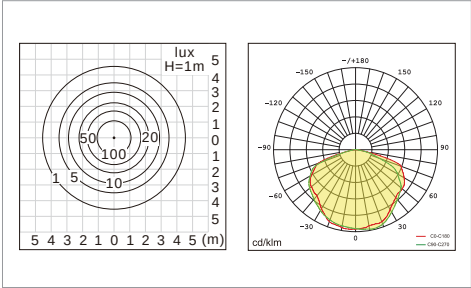


BOLE-U1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU1-24280-NN	2087lm	24W	2700K	On/off
B1BU1-24380-NN	2087lm	24W	3000K	On/off
B1BU1-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

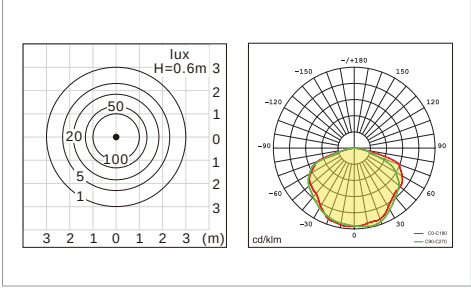


BOLE-U0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU0-10280-NN	907lm	10W	2700K	On/off
B1BU0-10380-NN	907lm	10W	3000K	On/off
B1BU0-10580-NN	907lm	10W	4000K	On/off
B1BU0-24280-NN	2087lm	24W	2700K	On/off
B1BU0-24380-NN	2087lm	24W	3000K	On/off
B1BU0-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

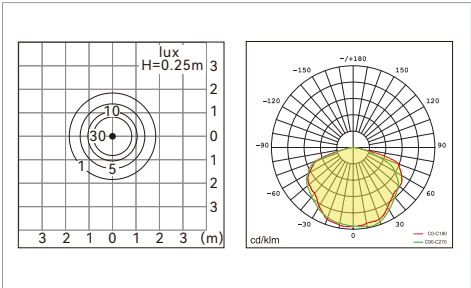


02 FLOODLIGHTS

Cica is a series of high-quality floodlights featuring a bionic, richly textured design composed of die-cast aluminum parts, a reflector, and tempered glass. With a high-quality outdoor powder-coating process, Cica offers strong weather resistance and carries an IP65 protection rating.

The Cica series adopts a one-piece die-casting process for excellent heat dissipation. It comes in four sizes and provides three beam angles to meet various lighting needs. Its deep anti-glare reflector ensures a clean light spot with an effective anti-glare effect. A variety of optical accessories and DALI-2 dimming are supported.

Cica floodlights are easy to install, with angle adjustment possible in two directions, precisely meeting the lighting requirements for trees, architecture, and sculptures. A five-year warranty is provided.

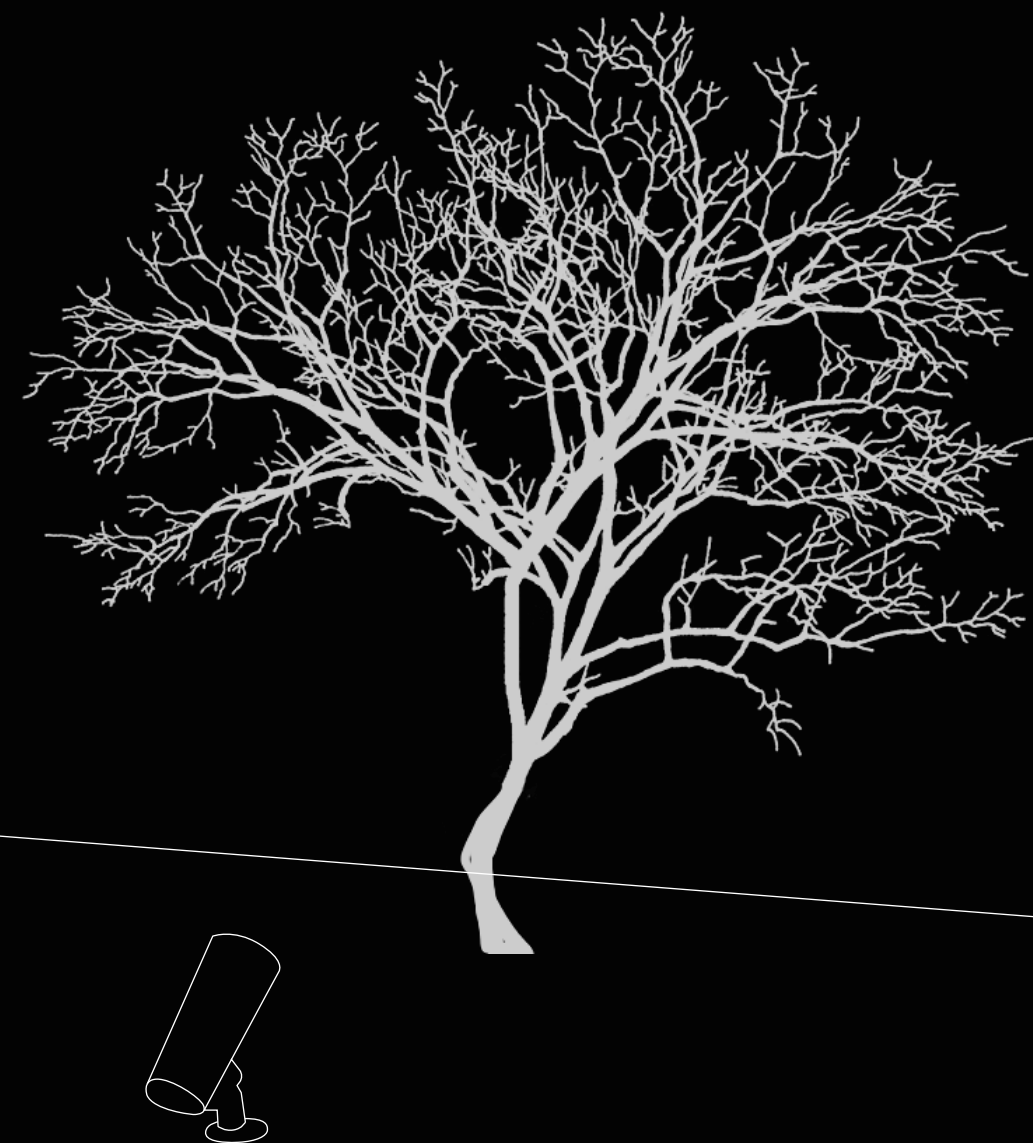

FLOODLIGHTS



CICA-X



CICA-M



CICA-S



CICA-T

Luminaire Wattage	40W	27W	10W	5W
Luminous Flux	2670lm/ 2543lm/ 2370lm	1730lm/ 2050lm/ 1810lm	685lm/ 595lm/ 706lm	1730lm/ 2050lm/ 1810lm
optics	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	24°/ 36°
CRI	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / DALI	On/off / DALI	On/off	On/off
Protection Level	IP65/ IK08	IP65/ IK08	IP65/ IK08	IP65/ IK08
Colours				

CICA

APPLICATIONS:
Trees, buildings and sculptures, etc.



- Bionic design
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming




CICA-X


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CX0-40502-NN	2670lm	40W	2700K/3000K/4000K	15°	On/off
B3CX0-40502-DN	2670lm	40W	2700K/3000K/4000K	15°	DALI 2
B3CX0-40503-NN	2543lm	40W	2700K/3000K/4000K	24°	On/off
B3CX0-40503-DN	2543lm	40W	2700K/3000K/4000K	24°	DALI 2
B3CX0-40504-NN	2370lm	40W	2700K/3000K/4000K	38°	On/off
B3CX0-40504-DN	2370lm	40W	2700K/3000K/4000K	38°	DALI 2

LIGHT DISTRIBUTION

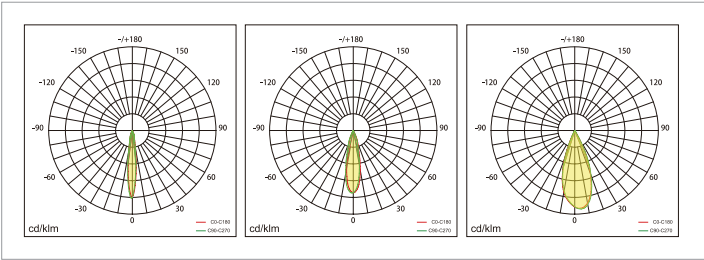

SIZE




CICA-M


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CM0-27502-NN	1730lm	27W	2700K/3000K/4000K	15°	On/off
B3CM0-27502-DN	1730lm	27W	2700K/3000K/4000K	15°	DALI 2
B3CM0-27503-NN	2050lm	27W	2700K/3000K/4000K	24°	On/off
B3CM0-27503-DN	2050lm	27W	2700K/3000K/4000K	24°	DALI 2
B3CM0-27504-NN	1810lm	27W	2700K/3000K/4000K	38°	On/off
B3CM0-27504-DN	1810lm	27W	2700K/3000K/4000K	38°	DALI 2

LIGHT DISTRIBUTION

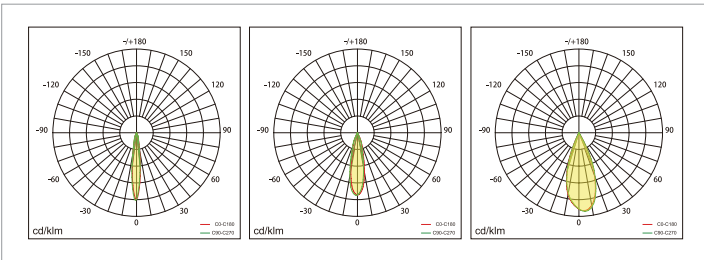

SIZE



CICA

APPLICATIONS:
Trees, buildings and sculptures, etc.



- Cica series use one piece die-casting molding process, good heat dissipation performance.
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming




CICA-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CS0-10502-NN	685lm	10W	2700K/3000K/4000K	15°	On/off
B3CS0-10503-NN	595lm	10W	2700K/3000K/4000K	24°	On/off
B3CS0-10504-NN	706lm	10W	2700K/3000K/4000K	38°	On/off

LIGHT DISTRIBUTION

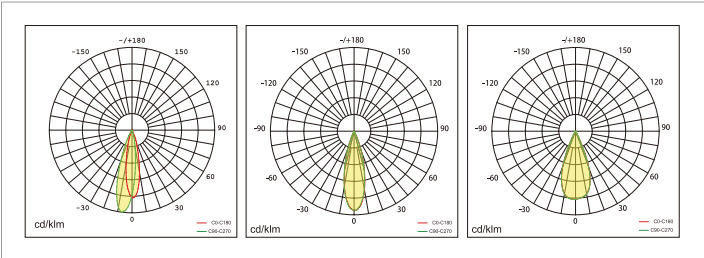

SIZE




CICA-T


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CT0-05503-NN	310lm	5W	2700K/3000K/4000K	24°	On/off
B3CT0-05504-NN	315lm	5W	2700K/3000K/4000K	36°	On/off

LIGHT DISTRIBUTION

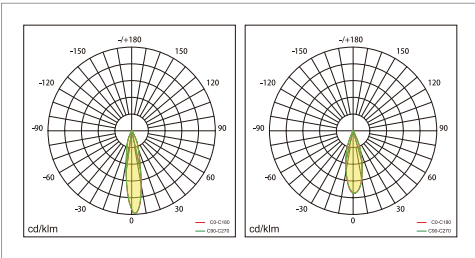

SIZE



03

WALL LUMINAIRES

Wall luminaires with simple design, composed of die-cast aluminium, reflector and tempered glass. With high-quality outdoor special powder coating, which can make the lamp have a tough weather resistance and anti-aging functions, and the protection grade is IP65.

Wall luminaires adopt deep anti-glare reflective cup, with direct and indirect light, which can provide a variety of light emission angles to meet the needs of various scenes, it is with comfortable vision and without light spot. There are optional accessories, which makes the lamp have excellent anti-glare performance. The lamp housing is with integrally die-cast aluminum, and has good heat dissipation performance. Optional DALI2, wireless intelligent dimming and other functions are optional, it is with built-in waterproof terminals, which is convenient for installation and maintenance.

We provide 5 years warranty the lamp can be used as indoor and outdoor facade lighting, architectural decorative lighting, etc.



WALL LUMINAIRES



PEGO-W



LUNA



CUBE



TIE-R



TIE-S



NATURE-W

Luminaire Wattage	5W	12W/ 24W	6W/ 12W/ 24W	24W/ 43W	24W/ 43W	10W
Luminous Flux	550lm	1300lm/ 2630lm	500lm/ 1050lm/ 2115lm	2350lm/ 3080lm	2382m/ 3120lm	963lm
optics	Asymmetric optics	130°	Asymmetric optics	↓ 18°/18°↑ / ↓ 24°/24°↑ / ↓ 36°/36°↑	↓ 18°/18°↑ / ↓ 24°/24°↑ / ↓ 36°/36°↑	360°
CRI	>80	>80	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	3000K/ 4000K CCT switchable	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off	On/off / DALI	On/off / DALI	On/off / DALI	On/off / DALI	On/off
Protection Level	IP65/ IK08	IP65/ IK06	IP65/ IK07	IP65/ IK07	IP65/ IK07	IP65/ IK08
Colours						

PEGO-W



APPLICATIONS:
Suitable for indoor and outdoor facade lighting, architectural decorative lighting, etc.



- Professional Optical Design for Outdoor Gardens
- 45° wide asymmetric beam angle
- Uniform illumination across 8x4M coverage
- 1,400hrs salt spray test




PEGO-W


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE0-05280-NN	550lm	5W	2700K	On/off	No
B1PE0-05380-NN	550lm	5W	3000K	On/off	No
B1PE0-05580-NN	550lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

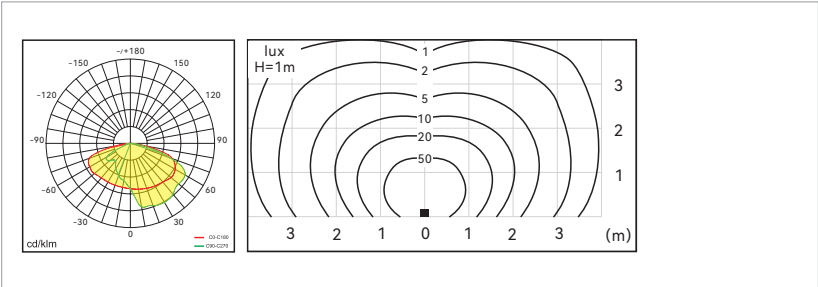

SIZE




LUNA

NEW

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.



- High-quality glass diffuser design, uniform illumination with no edge shadows
- DIP switch adjustable CCT for flexible adaptation to various applications
- 1,400hrs salt spray test

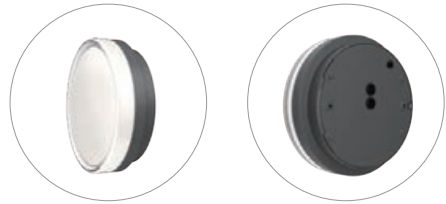


LUNA


PRODUCT MODEL

Part No.	LM	Power	CCT switchable	Dimming
B4LA0-12380-NN	1300lm	12W	4000K/3000K	On/off
B4LA0-12580-NN	1300lm	12W	4000K/3000K	On/off
B4LA0-12380-DN	1300lm	12W	4000K/3000K	DALI
B4LA0-12580-DN	1300lm	12W	4000K/3000K	DALI
B4LA0-24380-NN	2630lm	24W	4000K/3000K	On/off
B4LA0-24580-NN	2630lm	24W	4000K/3000K	On/off
B4LA0-24380-DN	2630lm	24W	4000K/3000K	DALI
B4LA0-24580-DN	2630lm	24W	4000K/3000K	DALI

LIGHT DISTRIBUTION



SIZE



CUBE



APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.



- Modular polarized lens design, various light distribution modes can be combined
- Single indirect/ direct light or both indirect and direct light optional
- Anti-glare design with large shielding angle
- IP65 protection, salt spray test more than 1400 hours




CUBE


PRODUCT MODEL

Part No.	LM	Power	CCT	Optic	Dimming
B4CU0-24366-NN	↑ 1120lm/995lm ↓	↑ 12W/12W ↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-24366-DN	↑ 1120lm/995lm ↓	↑ 12W/12W ↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12360-NN	995lm ↓	12W ↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12360-DN	995lm ↓	12W ↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12366-NN	↑ 550lm/500lm ↓	↑ 6W/6W ↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12366-DN	↑ 550lm/500lm ↓	↑ 6W/6W ↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-06360-NN	500lm ↓	6W ↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-06360-DN	500lm ↓	6W ↓	2700K/3000K/4000K	Asymmetric	DALI 2

LIGHT DISTRIBUTION



SIZE



TIE-R

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.



- Optional DALI2, wireless intelligent dimming
- Direct and indirect light




TIE-R


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TR0-24522-NN	2350lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TR0-24522-DN	2350lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TR0-24533-NN	2350lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TR0-24533-DN	2350lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TR0-24544-NN	2350lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TR0-24544-DN	2350lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2
B4TR0-43522-NN	3080lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TR0-43522-DN	3080lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TR0-43533-NN	3080lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TR0-43533-DN	3080lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TR0-43544-NN	3080lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TR0-43544-DN	3080lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2

LIGHT DISTRIBUTION

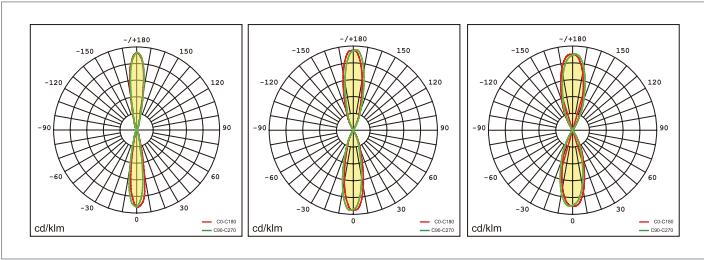

SIZE



TIE-S

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.



- Optional DALI2, wireless intelligent dimming
- Direct and indirect light




TIE-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TS0-24522-NN	2382lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TS0-24522-DN	2382lm	24W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TS0-24533-NN	2382lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TS0-24533-DN	2382lm	24W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TS0-24544-NN	2382lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TS0-24544-DN	2382lm	24W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2
B4TS0-43522-NN	3120lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	On/off
B4TS0-43522-DN	3120lm	43W	2700K/3000K/4000K	↓ 18°/18° ↑	DALI 2
B4TS0-43533-NN	3120lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	On/off
B4TS0-43533-DN	3120lm	43W	2700K/3000K/4000K	↓ 24°/24° ↑	DALI 2
B4TS0-43544-NN	3120lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	On/off
B4TS0-43544-DN	3120lm	43W	2700K/3000K/4000K	↓ 36°/36° ↑	DALI 2

LIGHT DISTRIBUTION

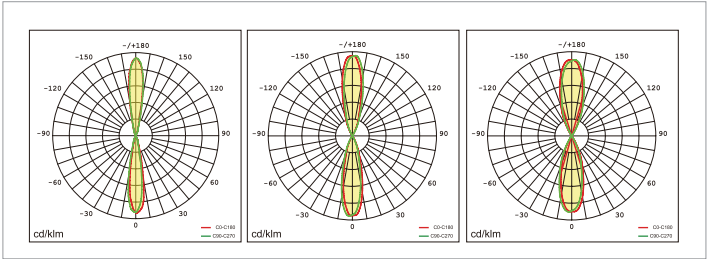

SIZE




NATURE-W

APPLICATIONS:
It can be used for indoor and outdoor facade lighting,architectural decorative lighting, etc.



No Glare



Light Emission 360°




NATURE-W


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B4NW0-10280-NN	963lm	10W	2700K	On/off
B4NW0-10380-NN	963lm	10W	3000K	On/off
B4NW0-10580-NN	963lm	10W	4000K	On/off

SIZE



LIGHT DISTRIBUTION



04 CEILING LUMINAIRES

Halo is a round ceiling lamp with simple appearance and rich texture. The main body of the lamp is die-cast and has good heat dissipation performance. With high quality outdoor powder technology, the lamp has tough weather resistance. Lamp protection grade is IP65.

Halo series have two product sizes with three beam angles to meet lighting requirements in various scenes. The optical part of the lamp is an integrated ring reflective cup design, with anti-glare hood and high quality toughened glass, so that the lamp has a good anti-glare effect and comfortable visual perception. Dali2 dimming, wireless dimming, radar sensing and other intelligent control modes can be provided.

Halo lamp is easy to install, and the optional installation accessories can meet the installation requirements in different cable outlet. The lamps have 5 years warranty.

It can be used in indoor lighting, outdoor corridor lighting, entrance lighting and other application areas.



CEILING LUMINAIRES



HALO-1



HALO-0



Luminaire Wattage	39W/ 25W	13W
Luminous Flux	2135lm/ 1987lm/ 1746lm 2600lm/ 2328lm/ 2000lm	1069lm/ 1105lm/ 1173lm
optics	20°/ 34°/ 48°	20°/ 34°/ 48°
CRI	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off/ DAIL/ Wireless	On/off
Sensor	Radar Sensor	Radar Sensor
Protection Level	IP65/ IK05	IP65/ IK05
Colours		

HALO

APPLICATIONS:
It can be used in indoor lighting, outdoor corridor lighting, entrance lighting



- The optical part is designed as a one-piece annular reflector
- Simple, easy and quick installation

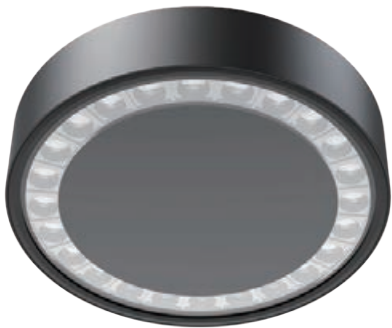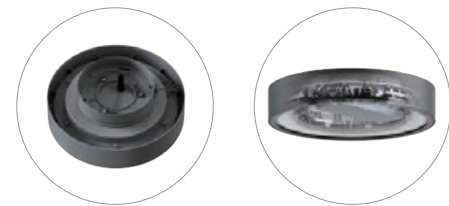


HALO-1


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA1-25520-NN	2135lm	25W	2700K/3000K/4000K	20°	On/off
B5HA1-25520-DN	2135lm	25W	2700K/3000K/4000K	20°	DALI 2
B5HA1-25520-WM	2135lm	25W	2700K/3000K/4000K	20°	Wireless
B5HA1-25540-NN	1987lm	25W	2700K/3000K/4000K	34°	On/off
B5HA1-25540-DN	1987lm	25W	2700K/3000K/4000K	34°	DALI 2
B5HA1-25540-WM	1987lm	25W	2700K/3000K/4000K	34°	Wireless
B5HA1-25550-NN	1746lm	25W	2700K/3000K/4000K	48°	On/off
B5HA1-25550-DN	1746lm	25W	2700K/3000K/4000K	48°	DALI 2
B5HA1-25550-WM	1746lm	25W	2700K/3000K/4000K	48°	Wireless
B5HA1-39520-NN	2600lm	39W	2700K/3000K/4000K	20°	On/off
B5HA1-39520-DN	2600lm	39W	2700K/3000K/4000K	20°	DALI 2
B5HA1-39520-WN	2600lm	39W	2700K/3000K/4000K	20°	Wireless
B5HA1-39540-NN	2328lm	39W	2700K/3000K/4000K	34°	On/off
B5HA1-39540-DN	2328lm	39W	2700K/3000K/4000K	34°	DALI 2
B5HA1-39540-WN	2328lm	39W	2700K/3000K/4000K	34°	Wireless
B5HA1-39550-NN	2000lm	39W	2700K/3000K/4000K	48°	On/off
B5HA1-39550-DN	2000lm	39W	2700K/3000K/4000K	48°	DALI 2
B5HA1-39550-WN	2000lm	39W	2700K/3000K/4000K	48°	Wireless

SIZE

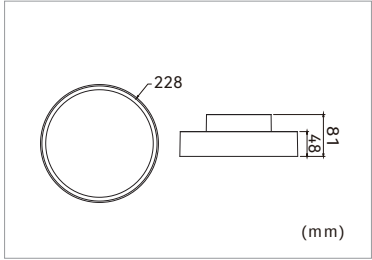

LIGHT DISTRIBUTION

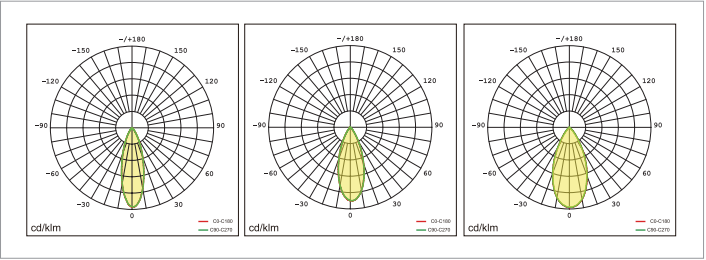


HALO-0


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA0-13520-NN	1069lm	13W	2700K/3000K/4000K	20°	On/off
B5HA0-13540-NN	1105lm	13W	2700K/3000K/4000K	34°	On/off
B5HA0-13550-NN	1173lm	13W	2700K/3000K/4000K	48°	On/off

LIGHT DISTRIBUTION

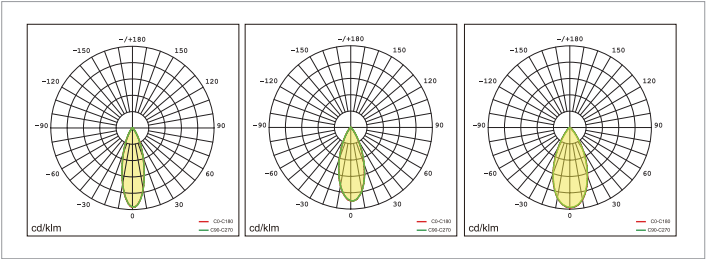

SIZE







05

WALL RECESSED LUMINAIRES

Safe series is a step lamp with a special optical design, and with a simple shape and rich texture. It is composed of die-casting aluminium parts, PC lenses and engineering plastic parts. The special surface treatment process for outdoor lamps makes the lamps have good weather resistance, and the protection grade is IP65.

Safe Step Light Series is available in square and rectangular shapes. The unique optical design makes the light outlet of the lamp small. With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity. It supports 1-10V dimming and Dali2 dimming.

We offer 5-year warranty. It can be applicable for indoor and outdoor use lighting purpose, wall path lighting, etc.



WALL RECESSED LUMINAIRES



SAFE-S



SAFE-O


Luminaire Wattage	4W	7W/ 8W
Luminous Flux	296lm	360lm
optics	Asymmetric optics	Asymmetric optics
CRI	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Sensor	No	No
Protection Level	IP65/ IK08	IP65/ IK05
Colours		

SAFE-S

APPLICATIONS:
It can be applicable for indoor and outdoor lighting purpose,wall path lighting, etc.



- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.

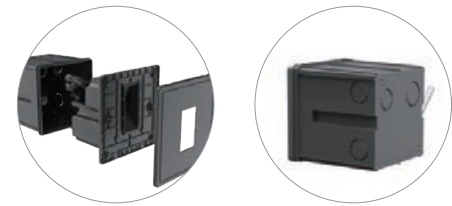


SAFE-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SS0-04250-NN	296lm	4W	2700K	On/off
B2SS0-04350-NN	296lm	4W	3000K	On/off
B2SS0-04550-NN	296lm	4W	4000K	On/off
B2SS0-04250-VN	296lm	4W	2700K	1-10V
B2SS0-04350-VN	296lm	4W	3000K	1-10V
B2SS0-04550-VN	296lm	4W	4000K	1-10V
B2SS0-04250-DN	296lm	4W	2700K	DALI 2
B2SS0-04350-DN	296lm	4W	3000K	DALI 2
B2SS0-04550-DN	296lm	4W	4000K	DALI 2

LIGHT DISTRIBUTION

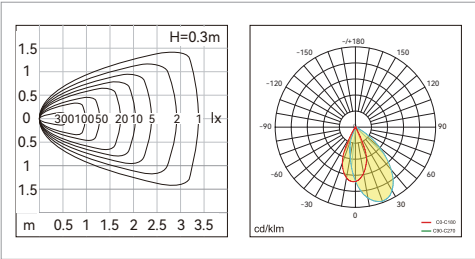

SIZE




SAFE-O

APPLICATIONS:
It can be applicable for indoor and outdoor lighting purpose.wall path lighting, etc.



- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.
- Sufficient position of knock-out holes ensure different wiring directions

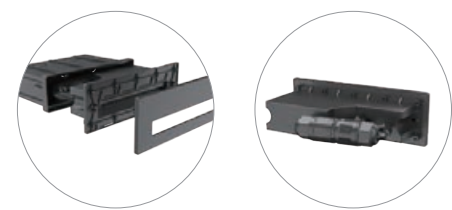


SAFE-O


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SO0-07250-NN	360lm	7W	2700K	On/off
B2SO0-07350-NN	360lm	7W	3000K	On/off
B2SO0-07550-NN	360lm	7W	4000K	On/off
B2SO0-08250-VN	360lm	8W	2700K	1-10V
B2SO0-08350-VN	360lm	8W	3000K	1-10V
B2SO0-08550-VN	360lm	8W	4000K	1-10V
B2SO0-08250-DN	360lm	8W	2700K	DALI 2
B2SO0-08350-DN	360lm	8W	3000K	DALI 2
B2SO0-08550-DN	360lm	8W	4000K	DALI 2

LIGHT DISTRIBUTION

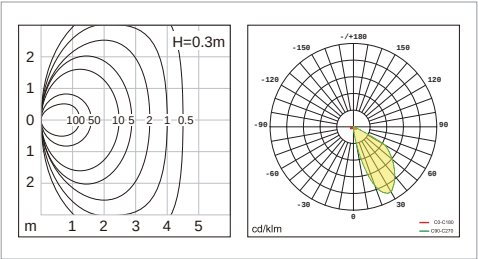

SIZE



06

TABLE LAMPS

NATURE T is a portable and rechargeable desk lamp with a compact and exquisite design that can last for 8 hours (± 1 hours) at full power.

It is controlled by the touch button on the top of the lamp to switch on and switch off the lamp and adjust its brightness.

NATURE T's excellent optical design with a wide range of irradiation, IP65/IK08, meets various indoor and outdoor lighting needs


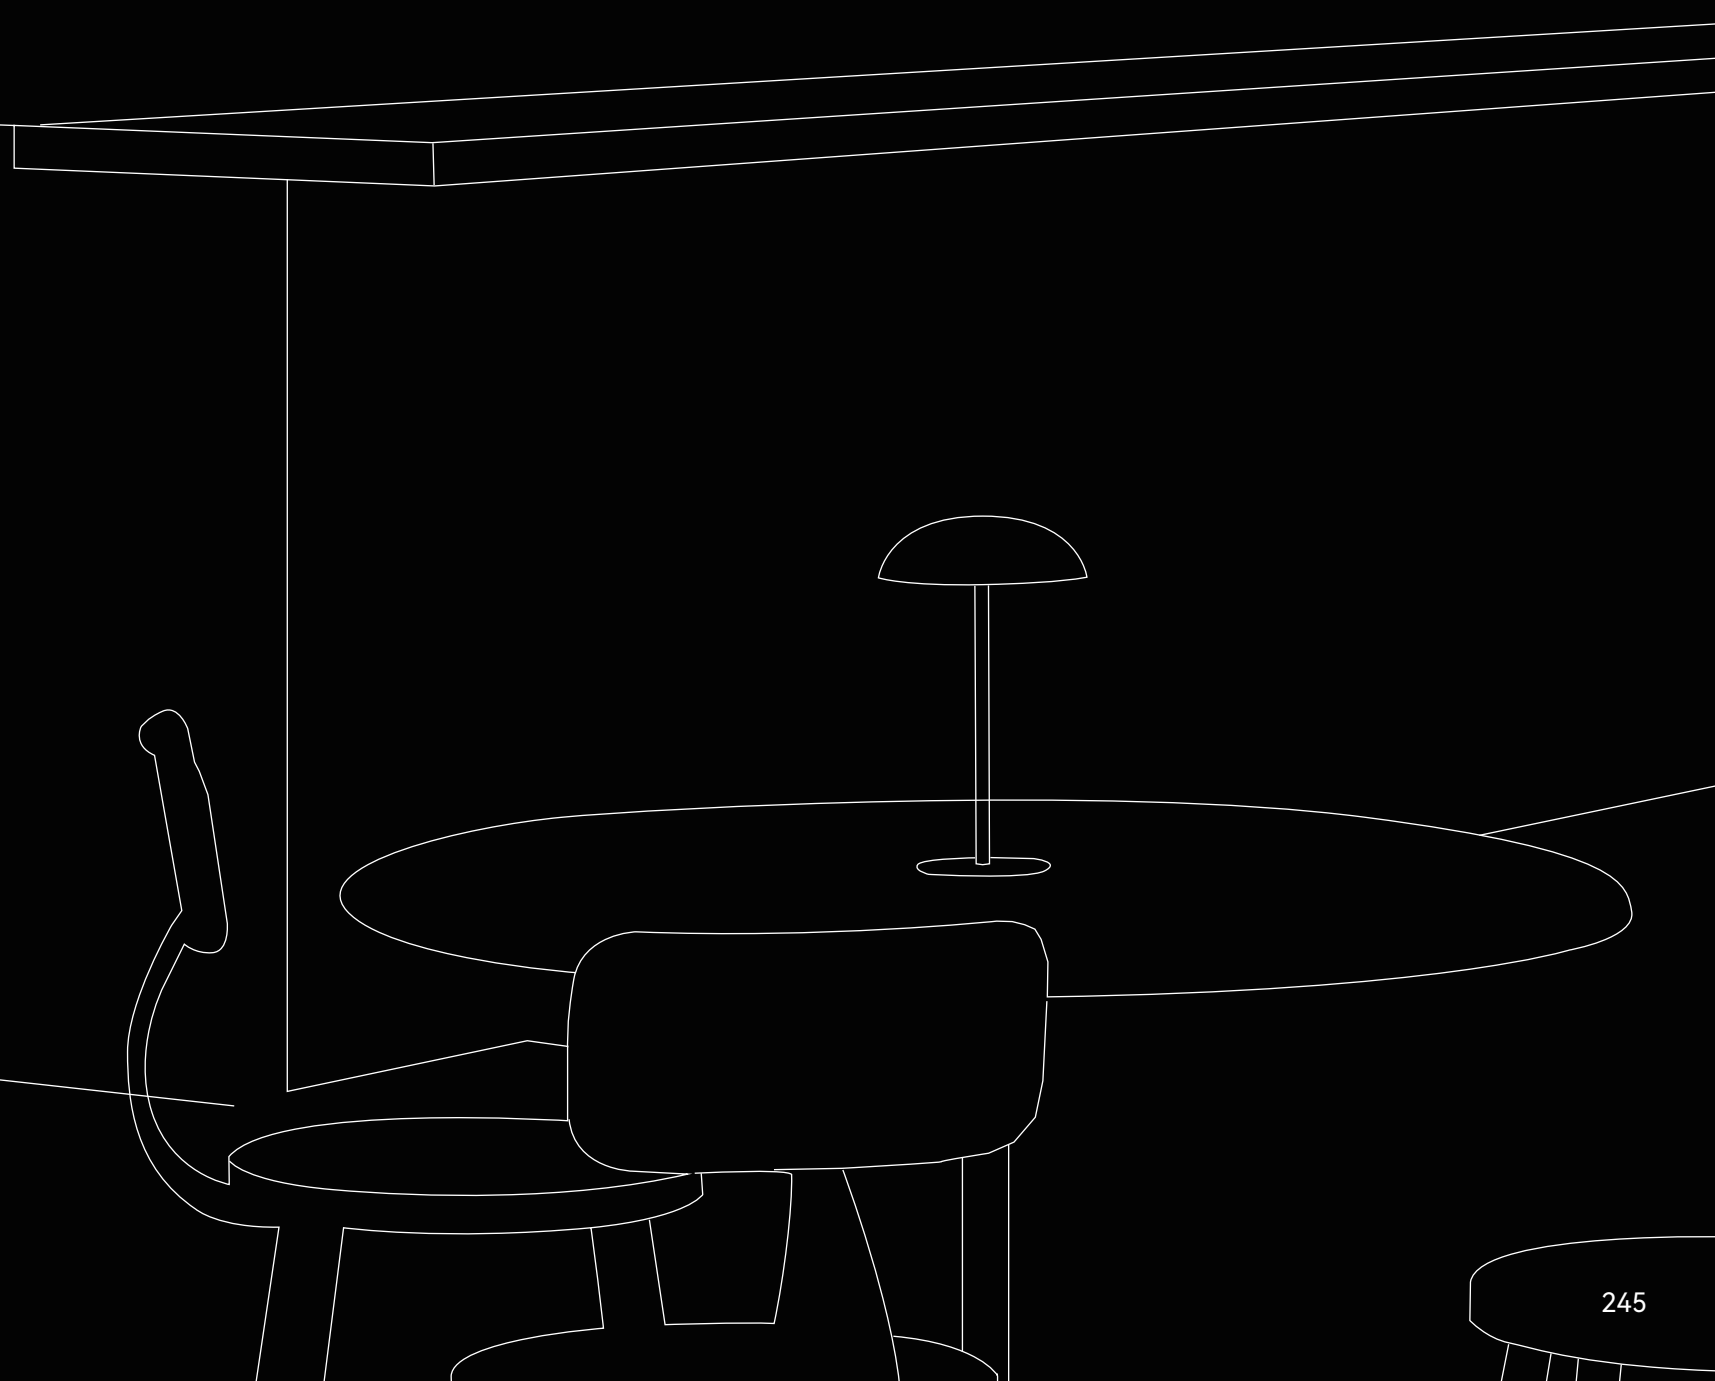


TABLE LAMPS



PUDDING

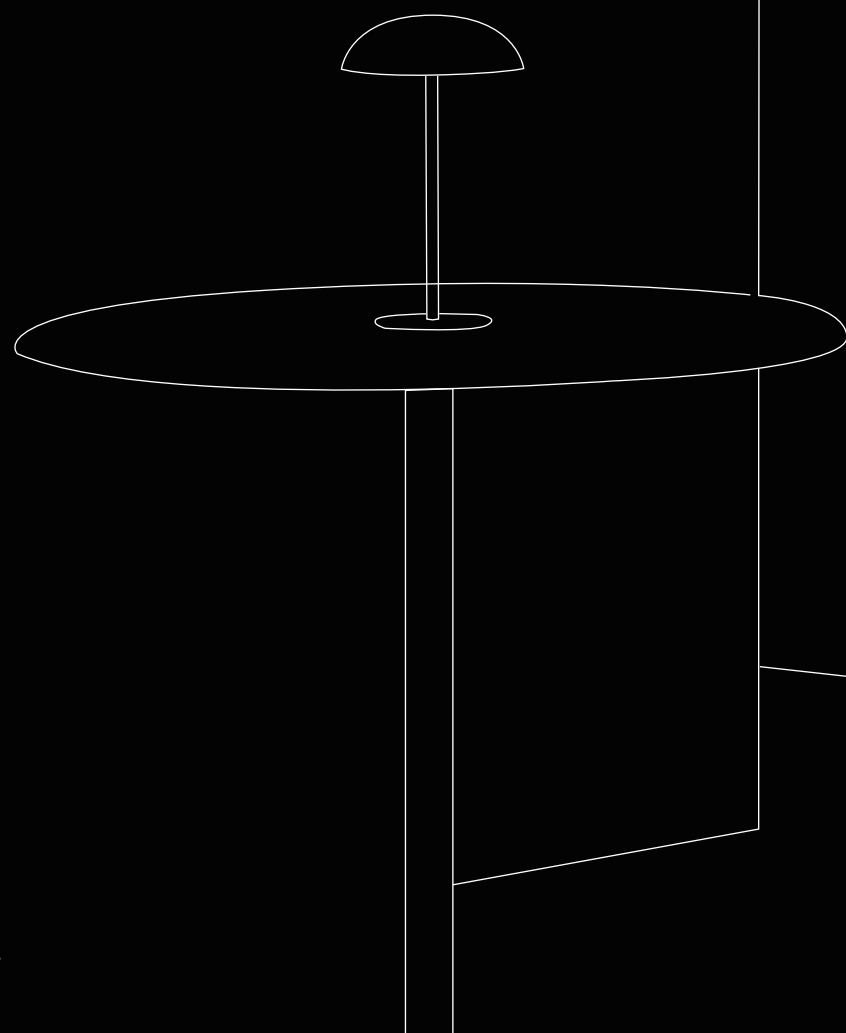

NATURE-T

Luminaire Wattage	4W	4W
Luminous Flux	400lm	344lm
optics	130°	145°
CRI	>90	>90
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Dimming	Touch dimming	Touch dimming
Batte Run time	6-8 hours	8 hours
Protection Level	IP65/ IK06	IP65/ IK08
Colours		

PUDDING



APPLICATIONS:
Meet various indoor and outdoor lighting needs

IP54 IK06

- Specially designed for courtyard gatherings;
- Magnetic mounting with multiple installation for indoor/outdoor applications;
- Optical lens with subtle sidelight emission, deliver comfortable light;
- 4.75 hours quick-charging battery delivering 6-8 hours of continuous operation;




PUDDING

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9PU0-04280-TN	400lm	4W	2700K	Touch dimming
B9PU0-04380-TN	400lm	4W	3000K	Touch dimming
B9PU0-04580-TN	400lm	4W	4000K	Touch dimming

SIZE



NATURE-T



APPLICATIONS:
Meet various indoor and outdoor lighting needs



- At full power can be used for 8 hours (±1 hours)
- 145°Wide beam angle, Provide wide light distribution
- charge with a Type C cable
- Lamp head is detachable




NATURE-T

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9NT0-04280-TN	344lm	4W	2700K	Touch dimming
B9NT0-04380-TN	344lm	4W	3000K	Touch dimming
B9NT0-04580-TN	344lm	4W	4000K	Touch dimming

SIZE



LIGHT DISTRIBUTION

