
NEXOL
NEW EXPERIENCE OF LIGHTING

LIGHT+
SMART+
MODULE+

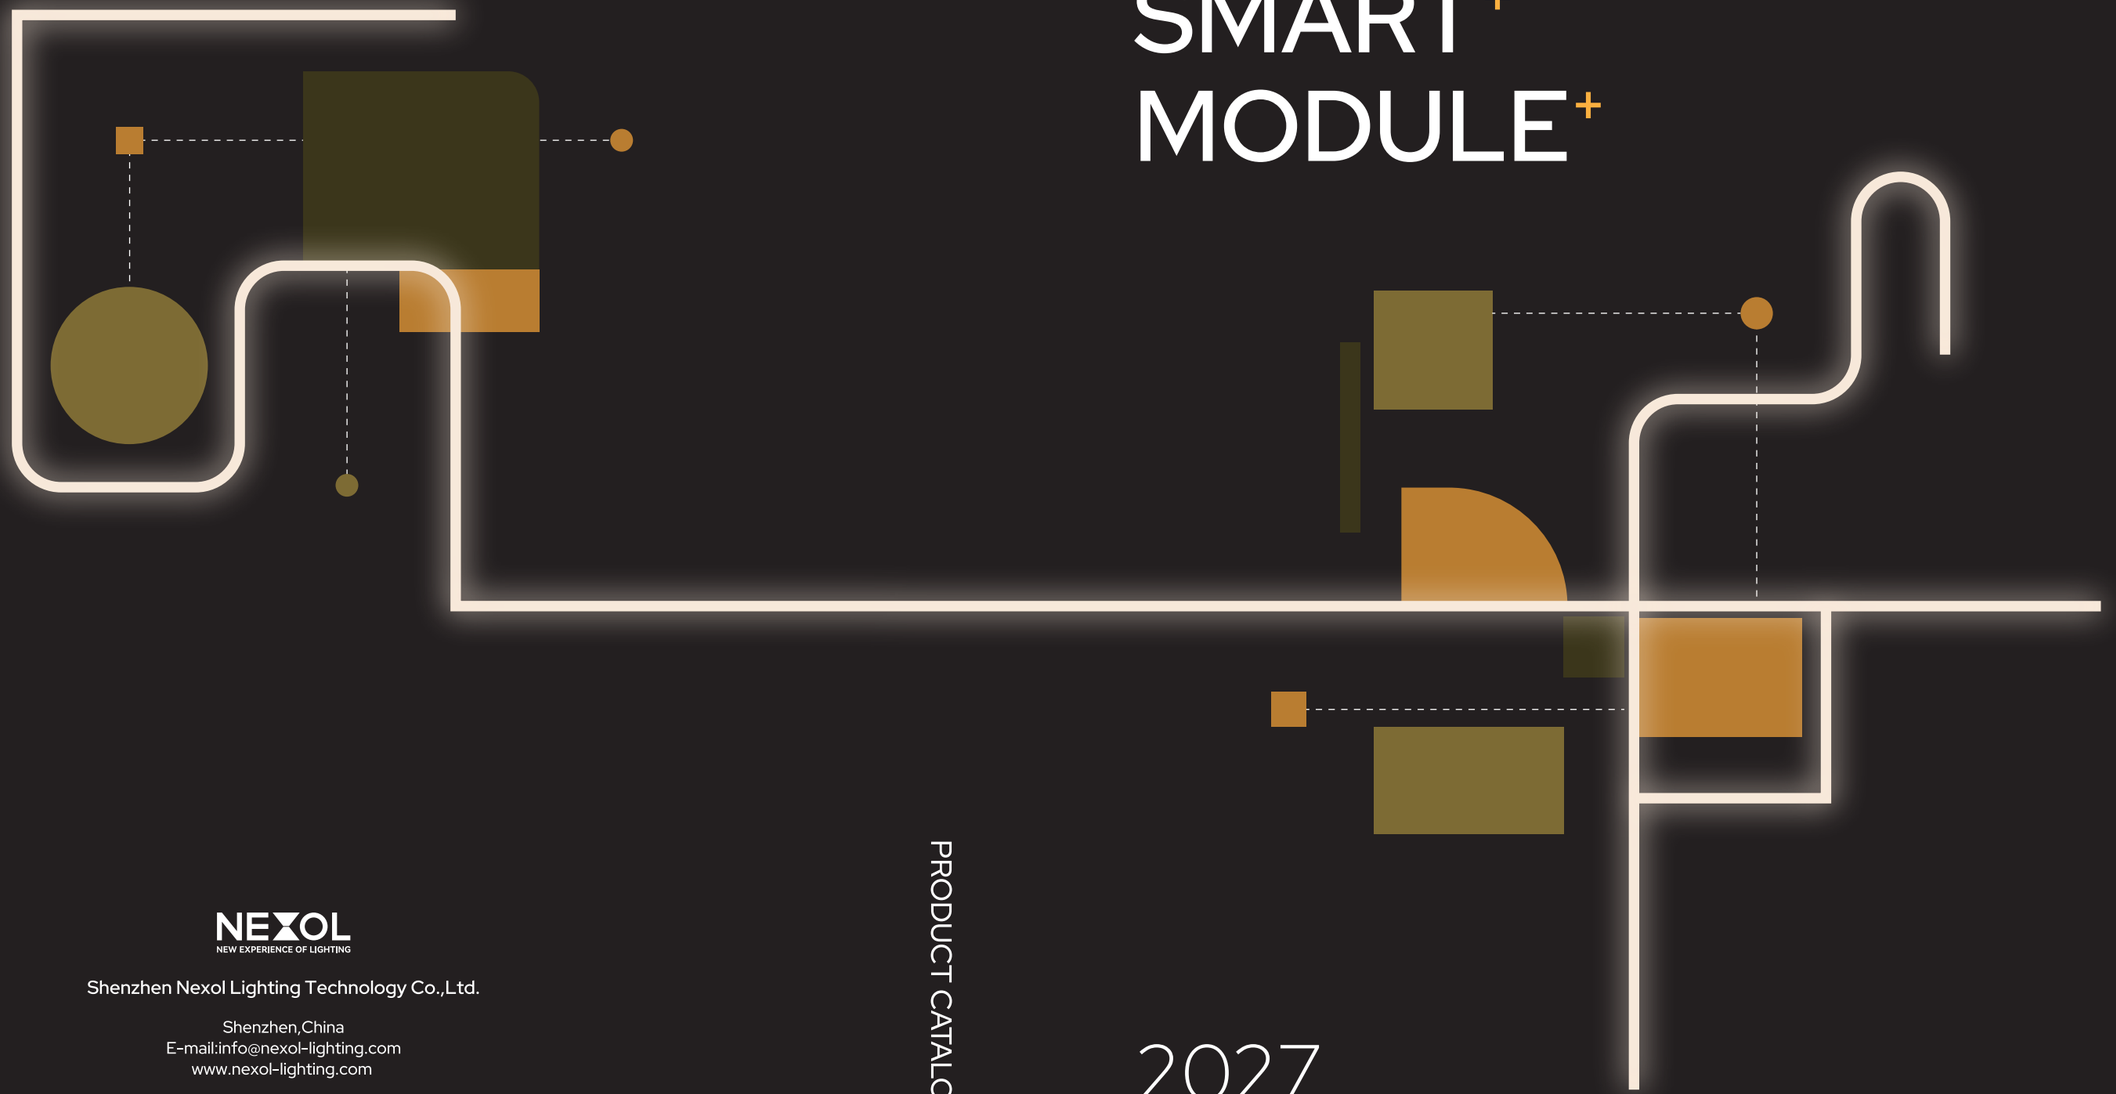

2027

SPECIFIC OFFICE & ARCHITECTURE GARDEN LIGHTING

PRODUCT CATALOGUE 2027

NEXOL
NEW EXPERIENCE OF LIGHTING

Shenzhen Nexol Lighting Technology Co.,Ltd.


Shenzhen,China
E-mail:info@nexol-lighting.com
www.nexol-lighting.com

All parameters in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.
Information provided is subject to change without notice. Please verify all details with NEXOL Lighting. Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 200K. Product illustrations serve as examples and may differ from the original. No liability is assumed for typographical or printing errors. We reserve the right to make alterations in the interest of improving our products.


NEW
EXPERIENCE
OF
LIGHTING

HISTORY

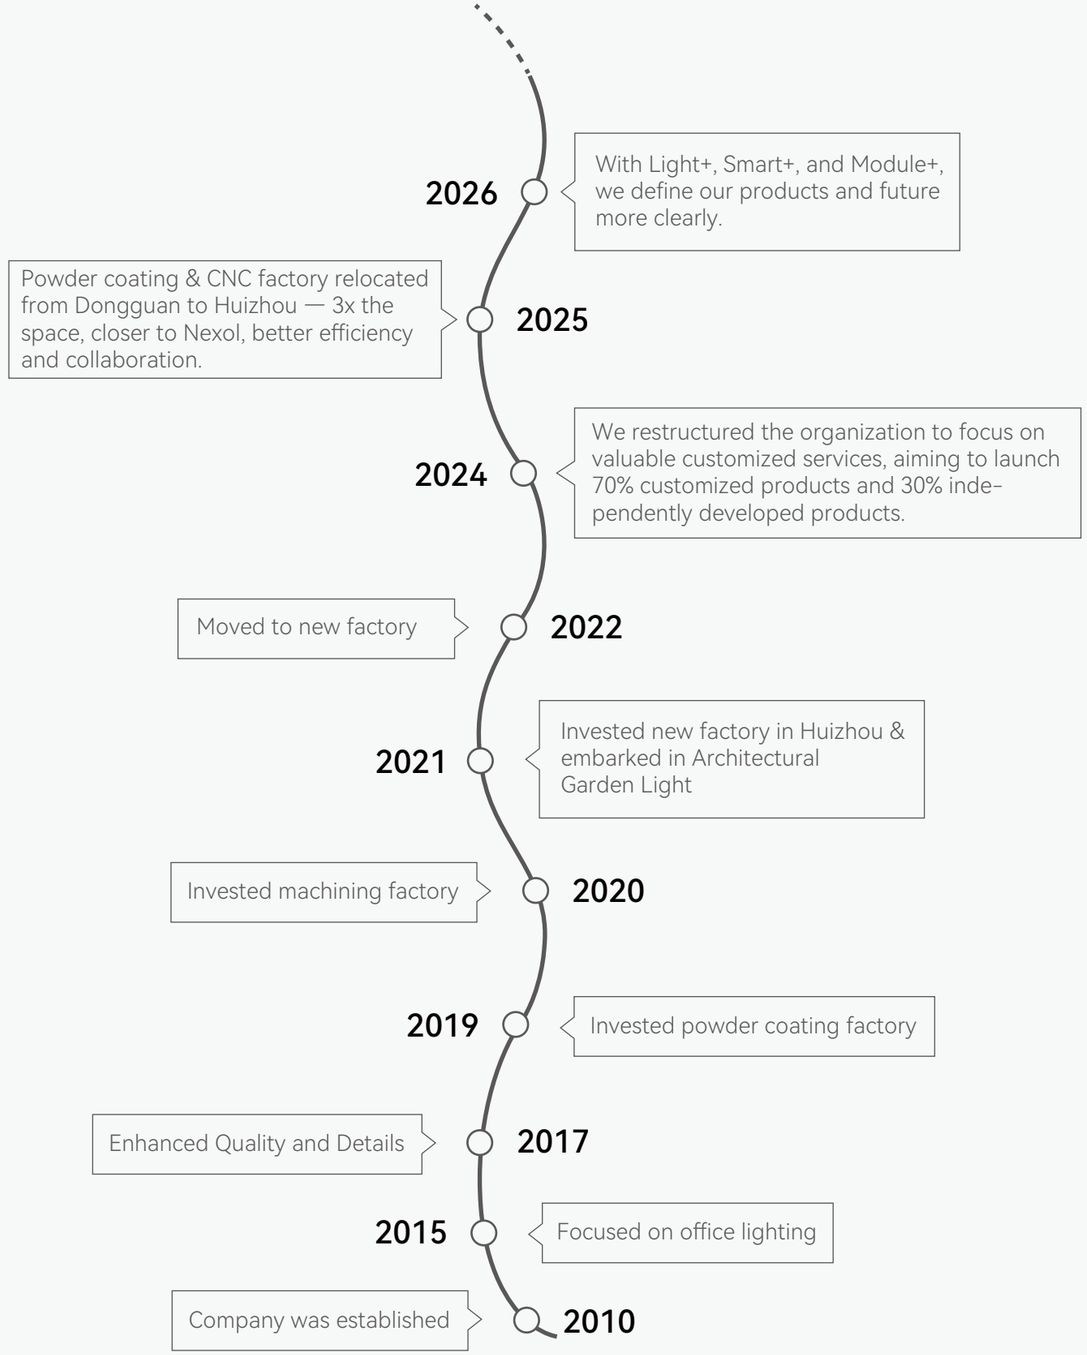
2026
With Light+, Smart+, and Module+, we define our products and future more clearly.
Powder coating & CNC factory relocated from Dongguan to Huizhou — 3x the space, closer to Nexol, better efficiency and collaboration.
2025
2024
We restructured the organization to focus on valuable customized services, aiming to launch 70% customized products and 30% inde-pendently developed products.
Moved to new factory
2022
2021
Invested new factory in Huizhou & embarked in Architectural Garden Light
Invested machining factory
2020
2019
Invested powder coating factory
Enhanced Quality and Details
2017
2015
Focused on office lighting
Company was established
2010

COMPANY PROFILE

NEXOL lighting established in 2010, has production bases and offices in Huizhou, Shenzhen. The company currently has 215+ employees, and its factory buildings cover a total area of 20,000 square meters, obtained ISO9001, ISO14001, and ISO45001 certifications.

The name of NEXOL comes from “New Experience of Lighting”, aims to offer a new concept of lighting with well thought intelligent & healthy lighting having the environment in mind and provide a high-quality lighting to create a positive atmo-sphere, adhering to a business strategy focused on customer centric, product leadership, quality assurance, outstanding details, and customization support.



What We Do

We are a full-process supplier specializing in office lighting and garden lighting, covering the entire chain from R&D and production to sales.

We focus on being a reliable OEM/ODM partner for our customers, offering custom-ized product solutions tailored to their specific needs.

Our core market is currently the German-speaking region. Building on this foundation, we aim to further expand into Europe, the Middle East, and other interna-tional markets.

Why Choose Us

A complete system built for customized solutions
We have established a comprehensive organization-al structure, technical platform, R&D capability, and process management system specifically designed to support customized projects. This enables us to respond quickly, execute smoothly, and reduce risks for our customers throughout the entire process.

Proven expertise in product design and innovation
Our extensive experience in product design and innovation allows us to develop practical, differenti-ated solutions that meet diverse market require-ments. As a result, our customers gain products that are not only functional, but also competitive and distinctive.

Market-driven insight and detail-oriented execution
We study the market, understand real customer needs, and pay close attention to every detail. This approach allows us to deliver solutions that truly match our customers’ expectations — on time, on spec, and with the right level of support.

CULTURE

Mission

Bring new lighting experience to end-users with healthy, comfortable, intelligent and eco-friendly lighting.

Provide customers with leading and innovative office & architecture garden luminaires and lighting solutions .

Vision

To be the global leading player in specific office lighting and architecture lighting field

Let the company's strivers live a decent life

To be the long lasting player who can run healthy

Values

Simplicity

Perfection

Openness

Progression

Business Strategies

Customer Centric

Product Leadership

Quality Assurance

Outstanding Details

Customization Support

FACTORY CAPABILITY

R&D CAPABILITY

R&D Investment

Invest >7% of the turnover for R&D every year.

ODM service

Provide professional & efficient customization support

New product


Deliver 40–60 customized products for customers each year, Independently develop 2–3 product families annually.

Patents

Own more than 100 patents.

ORIGINAL DESIGN

More than 100 patents

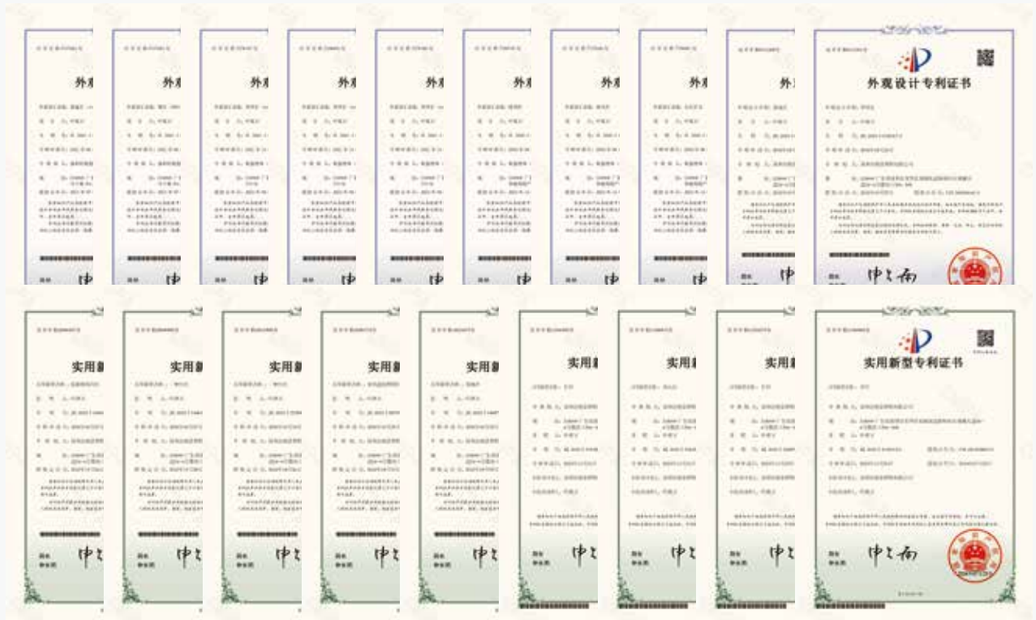

LABORATORY





EFFICIENT PRODUCTION BASE

10,000 ㎡ of Modern Factory; 120+ Workers;
15 luminaire production lines





CERTIFICATES

Nexol has ISO Certificates:
ISO9001:2015
ISO14001
ISO45001

We collaborate with qualified third-party testing Lab only (TUV, WALTEK, NTEK, CTI, LCS)
Products certifications（TUV ENEC, TUV GS, ERP, CE, ROHS)



MARKETING ACTIVITIES

Guangzhou International Lighting Exhibition, Hong Kong International Lighting Exhibition (Autumn Edition), Light+ Building Messe Frankfurt, Light+ Intelligent Building Middle East Dubai, Brazil EXPOLUX Lighting Fair...


NEXOL Lighting has been invited to participate in many large-scale exhibitions in lighting industry domestically and abroad. Stunning appearance with professional lighting product line and scenario-based booth design has been made in involved fairs, which vividly interpretes the new experience of healthy, comfortable, intelligent and environmentally friendly lighting. Various on-site visitors, industry professionals and media are attracted to stop by to visit and report.



SHOWROOM

Combining product functionality with application of aesthetics, NEXOL has created a large-scale, immersive lighting display and experience space in Huizhou that covers all scenarios.

With 1:1 restoration of product usage in multiple different styles, such as offices, courtyards, and residences, delivers a wonderful experience of what you see is what you get and what you get is what you feel.

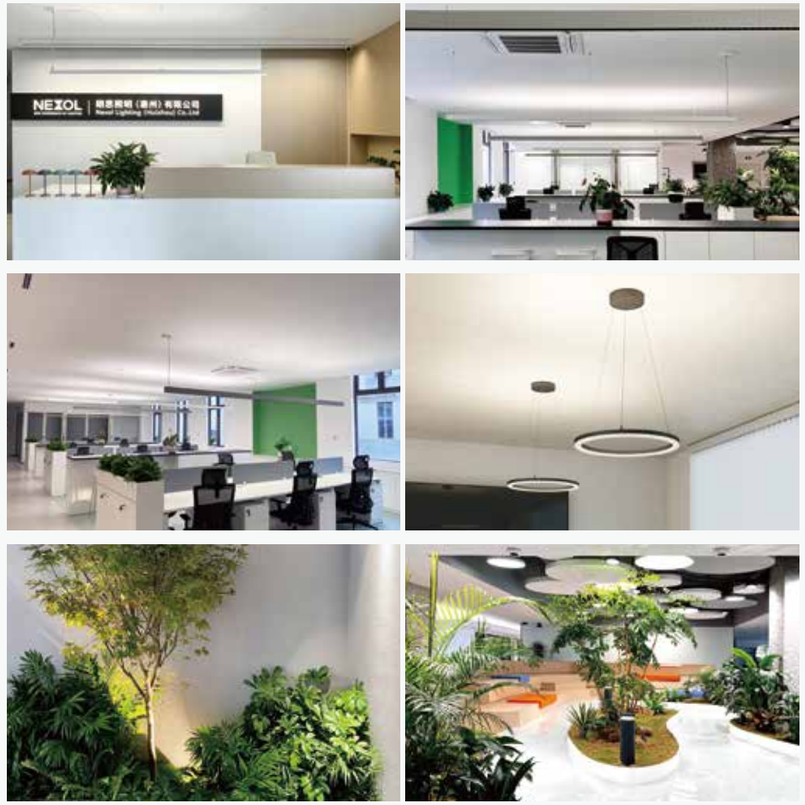

PRODUCT CODE

SPECIFIC OFFICE LIGHTING

X XX X - XX XXX XX - X X

- **Project source**
  B: R&D design
- **Product Name**
  MR: MAYE-R
  EF: ELFOO
  WA: WASE
  And so on
- **Mounting Solution**
  F: Floor lamp
  J: Floor lamp(cut on the pole)
  D: Double-head floor lamp
  And so on
- **Product size**
  Linear lamp(By length)
  Round lamp(By diameter)
  Floor lamp(By height)
  12:The length is about 1.2 meters
  15:The length is about 1.5 meters
- **Total power**
  060 : 60W
  080 : 80W
- **Direct power**
  20 : 20W
  30 : 30W
- **CCT Dimmable**
  (Free standing luminaires)
  B: Basic Function
  C: CCT Change
- **Dimmable function**
  (Other types of luminaires)
  N: On/Off
  D: Dali Dimming
  V: 1-10V/PWM Dimming
  T: Triac Dimming
  W: Wireless
- **Sensor**
  N: On/Off
  M: Motion Sensor
  D: Daylight Sensor
  E: Emergency

ARCHITECTURE GARDEN LIGHTING

X X XX X - XX X XX - X X

- **Project source**
  B: R&D design
- **Installation**
  Bollards
  Flood lights
  Wall luminaires
  And so on
- **Product Name**
  BR: Bole-R
  TR: TIS-R
  NT: Nature-T
  And so on
- **Serial code**
- **Luminaire Wattage**
  05 : 5W
  10 : 10W
  20 : 20W
  And so on
- **CCT**
  0 : Tunable white
  1 : 2500K
  2 : 2700K
  3 : 3000K
  4 : 3500K
  5 : 4000K
  6 : 4500K
  7 : 5000K
  8 : >5000K
  9 : Color
- **Beam Angle**
  1 : 5°~10°
  2 : 11°~20°
  3 : 21°~30°
  4 : 31°~40°
  5 : 41°~60°
  6 : 61°~90°
  7 : 91°~120°
  8 : > 120°
  0 : non-luminous
- **Dimmable function**
  (Other types of luminaires)
  N: On/Off
  D: Dali Dimming
  V: 1-10V/PWM Dimming
  T: Touch Dimming
  W: Wireless
- **Sensor**
  N: On/Off
  M: Motion Sensor
  D: Daylight Sensor

CONTENTS

01 **SPECIFIC OFFICE LIGHTING** ---- **17**

FREE STANDING LUMINAIRES ---- 19

DESK FIXED LUMINAIRES ---- 51

PENDANT LUMINAIRES ---- 67

SURFACE MOUNTED LUMINAIRES ---- 99

RECESSED LUMINAIRES ---- 113

WALL MOUNTED LUMINAIRES ---- 123

02 **ARCHITECTURE GARDEN LIGHTING** ---- **131**

BOLLARDS ---- 133

FLOODLIGHTS ---- 153

SURFACE MOUNTING LUMINAIRES ---- 157

WALL RECESSED LUMINAIRES ---- 175

TABLE LAMPS ---- 179

SPECIFIC OFFICE LIGHTING

01 FREE STANDING LUMINAIRES



Dawn-F2 23 NOVA-F1 25 ROMAN-F1 27 Equo-F 29 ELFOO-F 2.0 31 LENO-F 2.0 33 NEAT-F 35 MAYE-FR 2.0 MAYE-FS 2.0 37



FREE-F 39 HOMEC 3.0 HOMEO 3.0 41 NITEC 3.0 NITEO 3.0 43 ROMI-F 45 FIT-F 47 COFFEE-R 49

02 DESK FIXED LUMINAIRES



Equo-T 53 ELFOO-T 2.0 55 LENO-T 2.0 57 MAYE-TR 2.0 MAYE-TS 2.0 59 HOMET 3.0 61 NITET 3.0 63 FIT-T 65

03 PENDANT LUMINAIRES



Linx 50 71 Dawn-P0 75 Dawn-P1 77 Equo-P 79 MAYE Pro-PS 81 ROMAN-P0 83 ROMAN-P1 85 EZY-P 87



ROMI-P 89 FREE-P 2.0 91 KEY-P 93 ELFOO-P 95 LENO-P2 97

04 SURFACE MOUNTED LUMINAIRES



Equo-C 101 FREE-C 2.0 103 EZY-C 105 ROMI-C 2.0 107 KEY-C 109 ELFOO-C 111

05 RECESSED LUMINAIRES



Linear XS 20 115 REP 117 EZY-R 119 KEY-R 121

06 WALL MOUNTED LUMINAIRES



MEDI-W 125 MAYE-WS 2.0 127 POD 129

ARCHITECTURE GARDEN LIGHTING

01 BOLLARDS









SHOW-L 135 PEGO 137 BUTTON-L 139 BOLE-M 141 BOLE-R 143 BOLE-S 147 BOLE-U 151

02 FLOODLIGHTS



CICA 155

03 SURFACE MOUNTING LUMINAIRES










AERIS 159 AERIS 161 HALO 163 LUNA 165 PEGO 167 CUBE 169 TIE 171 NATURE-W 173

04 WALL RECESSED LUMINAIRES



SAFE 177

05 TABLE LAMPS




PUDDING 181 NATURE-T 183



SPECIFIC OFFICE LIGHTING

SPECIFIC OFFICE LIGHTING

01.

FREE STANDING LUMINAIRES - - - - - - - - - - - - - - - - 19

DESK FIXED LUMINAIRES - - - - - - - - - - - - - - - - - - - 51

PENDANT LUMINAIRES - - - - - - - - - - - - - - - - - - - 67

SURFACE MOUNTED LUMINAIRES - - - - - - - - - - - - - 99

RECESSED LUMINAIRES - - - - - - - - - - - - - - - - - - - 113

WALL MOUNTED LUMINAIRES - - - - - - - - - - - - - - - 123

FREE STANDING LUMINAIRES



Dawn-F2



Nova-F1



ROMAN-F1



Equo-F



ELFOO-F 2.0



LENO-F 2.0



NEAT-F

Luminaire Wattage	80W	80W/ 100W/ 90W (Casambi)	80W	80W	80W	80W	60W
Luminous Flux	11040lm	11200lm/ 14000lm	11800lm	10800lm	10800lm	11600lm	7500lm
UGR	<14	<14	<11	<12	<12	<6	<18
optics	↑150° / 70°↓	Asymmetric optics	↑115° / 60°↓	↑155° / 75°↓	↑155° / 75°↓ or ↑155° / 50°↓	↑115° / 50°↓	↑115° / 80°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Knob dimming
Sensor	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor/ Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor/ Casambi / Meshle	NO
Colours	● ○ ●	● ○ ●	● ○ ●	● ○ ●	● ○ ●	● ○ ●	● ○ ●

SPECIFIC OFFICE LIGHTING

FREE STANDING LUMINAIRES



MAYE-FR 2.0
MAYE-FS 2.0



FREE-F




HOMEC 3.0
HOMEO 3.0



NITEC 3.0
NITEO 3.0



ROMI-F

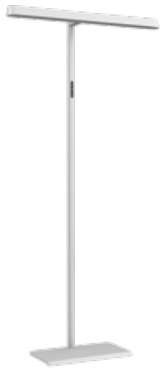


FIT-F



COFFEE-R

	MAYE-FR 2.0 MAYE-FS 2.0	FREE-F	HOMEC 3.0 HOMEO 3.0	NITEC 3.0 NITEO 3.0	ROMI-F	FIT-F	COFFEE-R
Luminaire Wattage	80W/ 100W	80W/ 100W	60W/ 80W	60W/ 80W	80W	60W	45W
Luminous Flux	11200lm/ 11516lm/ 15000lm	10400lm/ 13300lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	9645lm	5530lm	6400lm
UGR	<18/ <14/ <13	<14	<16/ <19/ <11	<16/ <19/ <11	<16	<18	<10
optics	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 90°↓	↑100°/70°↓	↑115°
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white
Dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Knob dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	NO	Motion sensor	NO
Colours	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●



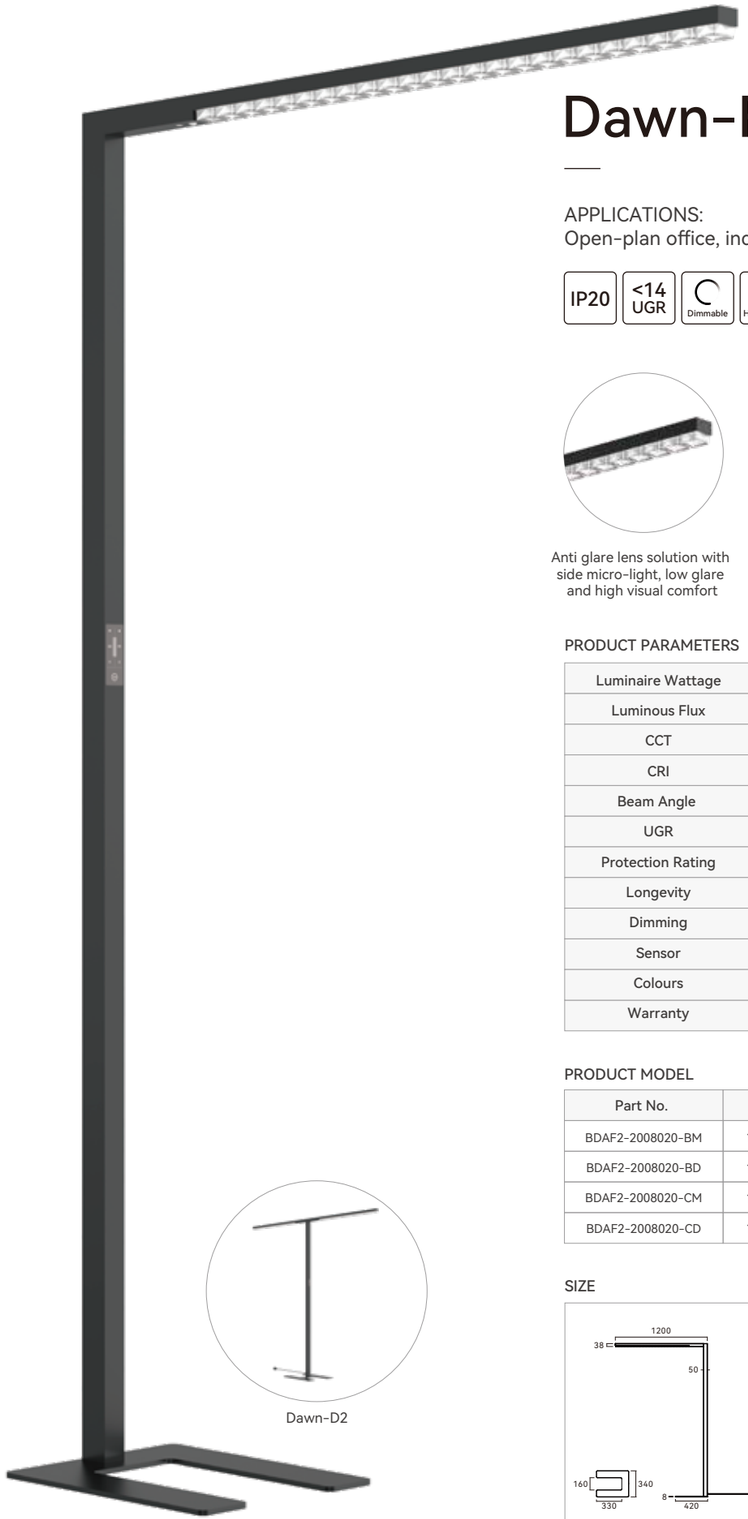

Dawn-F2


APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <14 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS

Anti glare lens solution with side micro-light, low glare and high visual comfort



150° wide beam angle lens for indirect light



4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;

PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11040lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑150° / 70°↓
UGR	<14
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BDAF2-2008020-BM	↑8640lm/2400lm↓	↑60W/20W↓	3000/4000/6000K
BDAF2-2008020-BD	↑8640lm/2400lm↓	↑60W/20W↓	3000/4000/6000K
BDAF2-2008020-CM	↑8100lm/2300lm↓	↑60W/20W↓	3000~5700K
BDAF2-2008020-CD	↑8100lm/2300lm↓	↑60W/20W↓	3000~5700K


Dawn-D2

SIZE

LIGHT DISTRIBUTION







Casambi smart module
enables app control
with Swarm, HCL

NOVA-D1

NOVA-F1

APPLICATIONS:
Open-plan office, individual office, etc.


IP20 | <14 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS



Asymmetric optics
Desktop uniformity
U0 >0.75



Integrated die-cast and 23mm
ultra-thin lamp head, good
heat dissipation performance



Daylight sensor &
Presence sensor


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W	90W (Casambi)
Luminous Flux	11200lm	14000lm	11200lm
CCT	3000K / 4000K / 6000K / Tunable white		
CRI	>80		
Optic	Asymmetric optics		
UGR	<14		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor & Motion sensor/Presence sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNOF1-2008012-BD	↑9580lm/1620lm↓	↑68W/12W↓	3000/4000/6000K
BNOF1-2008012-CD	↑8900lm/1500lm↓	↑68W/12W↓	3000~5700K
BNOF1-2010012-BD	↑12380lm/1620lm↓	↑88W/12W↓	3000/4000/6000K
BNOF1-2010012-CD	↑11500lm/1500lm↓	↑88W/12W↓	3000~5700K
BNOF1-2009012-CC	↑9828lm/1372lm↓	↑78W/12W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION








ROMAN-D1 & ROMAN-F2

ROMAN-F1

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <11 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS



Large angle cut-off, effective control of light glare Anti-glare modules



Light efficiency up to 148LM/W



Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑115° / 60°↓
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BROF1-1908020-BD	↑9350lm/2450lm↓	↑60W/20W↓	3000/4000/6000K
BROF1-1908020-CD	↑8800lm/2000lm↓	↑60W/20W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION







Equo-F

APPLICATIONS:
Open-plan office, individual office, etc.



Ultimate uniform and quality lighting effects with professional glare control, UGR <12



155° wide beam angle lens for indirect light



4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑155° / 75°↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BEQF-1908020-BD	↑8500lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BEQF-1908020-CD	↑7500lm/2100lm↓	↑60W/20W↓	3000~5700K

SIZE




LIGHT DISTRIBUTION







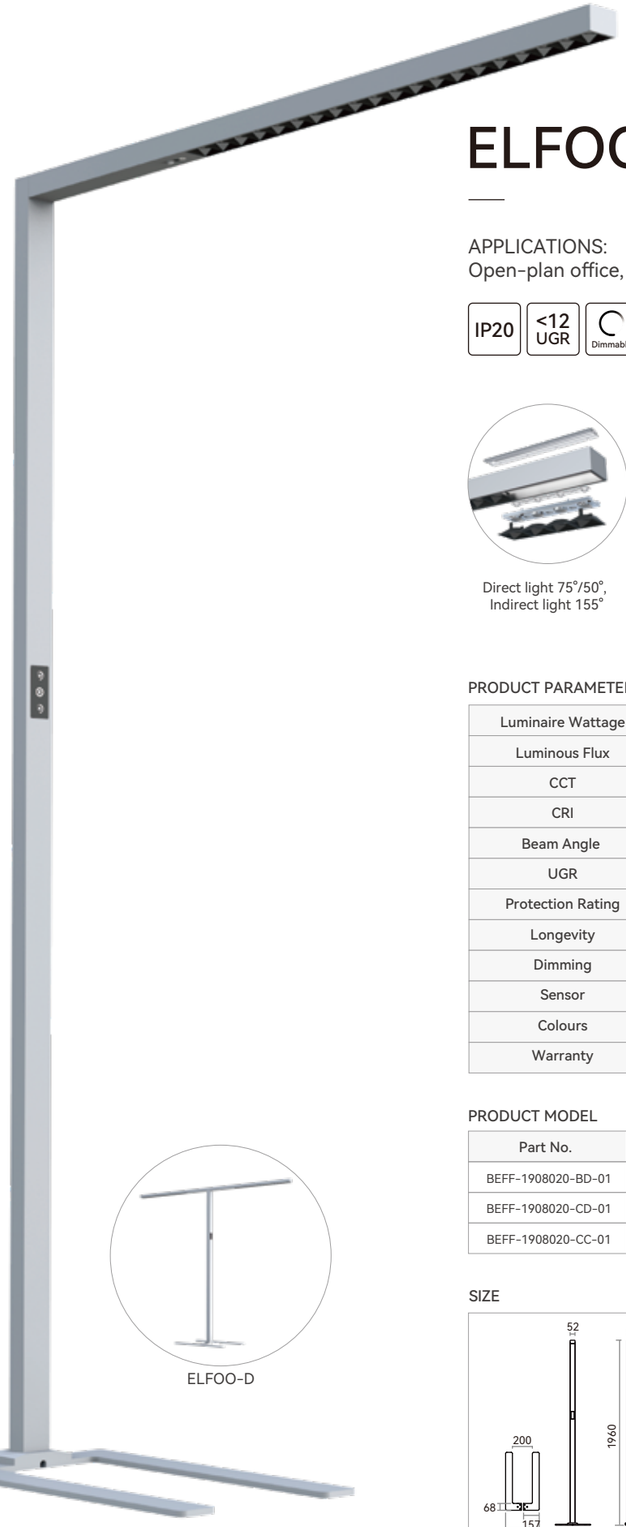

ELFOO-D

ELFOO-F 2.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <12 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS

Direct light 75°/50°,
Indirect light 155°



Daylight sensor
Motion sensor



Casambi smart module
enables app control
with Swarm, HCL


PRODUCT PARAMETERS

Luminaire Wattage	80W		
Luminous Flux	10800lm	9600lm	9600lm
CCT	3000/4000/6000K	3000~5700K	3000~5700K
CRI	>80		
Beam Angle	↑155° / 75°↓ or ↑155° / 50°↓		
UGR	<12		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor	Casambi	
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BEFF-1908020-BD-01	↑8500lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BEFF-1908020-CD-01	↑7500lm/2100lm↓	↑60W/20W↓	3000~5700K
BEFF-1908020-CC-01	↑7500lm/2100lm↓	↑60W/20W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION









LENO-F 2.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <6 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS



Micro reflector design
UGR<6



Daylight sensor
Presence sensor



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W	
Luminous Flux	11600lm	11200lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
Beam Angle	↑115° / 50°↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Motion sensor / Presence sensor or Daylight sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BLEF-1908020-BD-01	↑9300lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BLEF-1908020-BD-02	↑9300lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BLEF-1908020-CD-01	↑8950lm/2250lm↓	↑60W/20W↓	3000~5700K
BLEF-1908020-CD-02	↑8950lm/2250lm↓	↑60W/20W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION





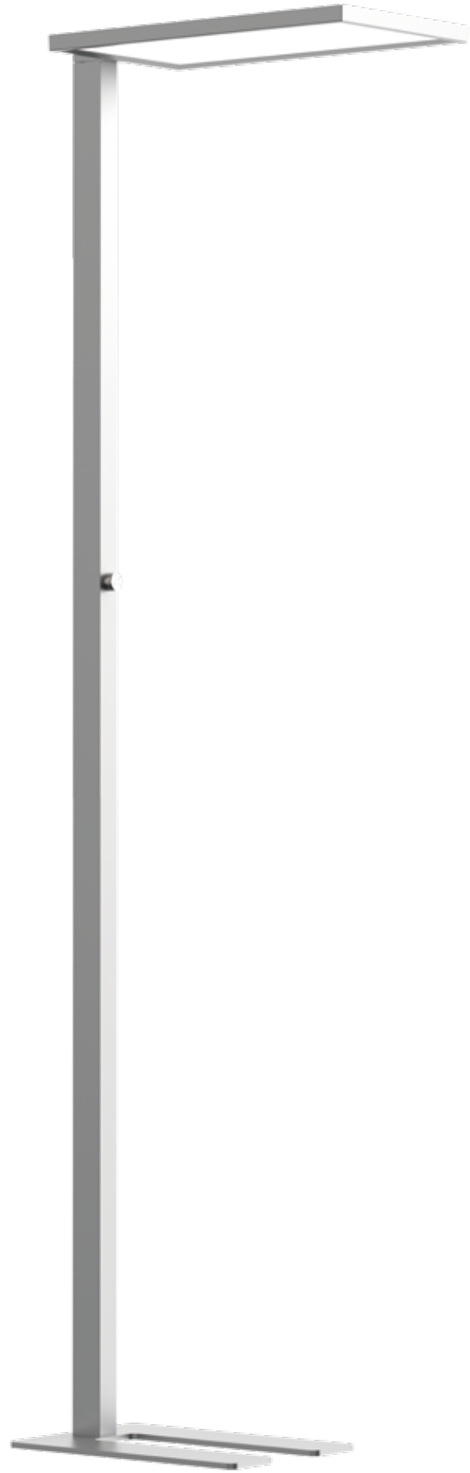

NEAT-F

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | CE | RoHS



Integrated die-cast and 22mm ultra-thin lamp head



Competitive price



Microprismatic diffuser design with low glare


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7500lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	↑115° / 80°↓
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	NO
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BNEJ-1906030-BN	↑4200lm/3300lm↓	↑30W/30W↓	3000/4000/6000K

SIZE




LIGHT DISTRIBUTION







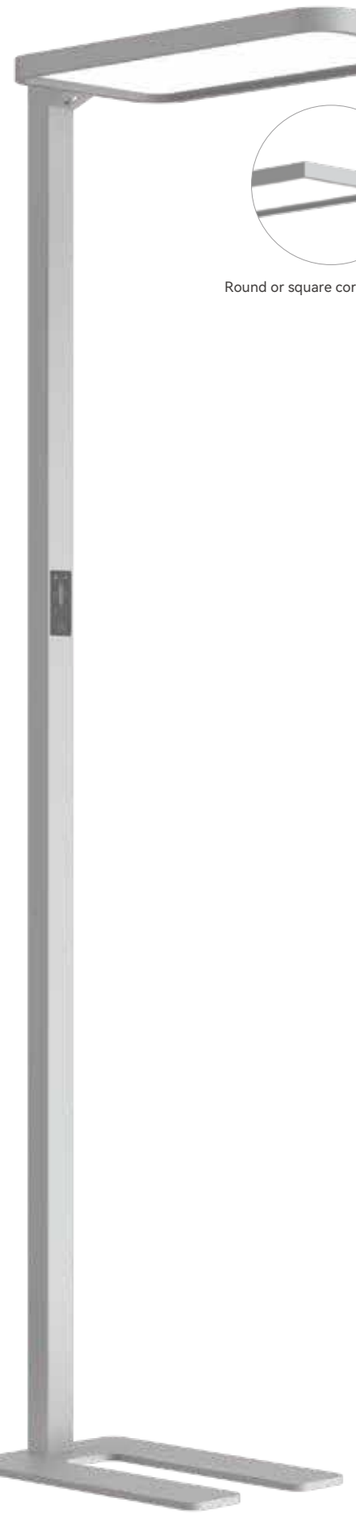

Round or square corners optional

MAYE-FR/MAYE-FS 2.0

APPLICATIONS:
Open-plan office, individual office, etc.





High light efficiency reach 150LM/W



Daylight sensor Motion sensor



Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BMRF-1908040-BN-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRF-1908040-BM-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRF-1908040-BD-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRF-1908022-BN	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRF-1908022-BM	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRF-1908022-BD	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRF-1908022-CD	↑8200lm/2200lm↓	↑58W/22W↓	3000~5700K
BMRF-1910020-BN	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRF-1910020-BM	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRF-1910020-BD	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRF-1910020-CD	↑11050lm/2500lm↓	↑80W/20W↓	3000~5700K

SIZE




LIGHT DISTRIBUTION







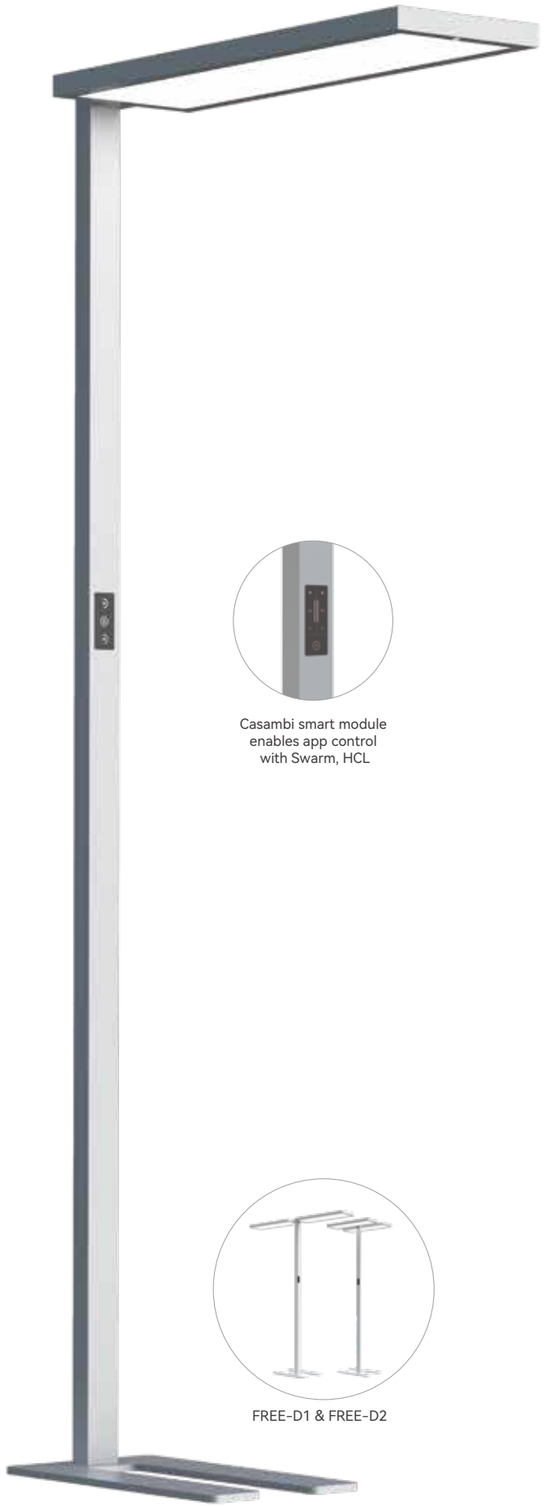

Casambi smart module
enables app control
with Swarm, HCL

FREE-D1 & FREE-D2

FREE-F

APPLICATIONS:
Open-plan office, individual office, etc.



Patent design, simple
design style, rich texture



Light efficiency
up to 135LM/W



Casambi smart module
enables app control
with Swarm, HCL


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W
Luminous Flux	10400lm	13300lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BFRF-1908024-BN	↑7280lm/3120lm↓	↑56W/24W↓	3000/4000/6000K
BFRF-1908024-BD	↑7280lm/3120lm↓	↑56W/24W↓	3000/4000/6000K
BFRF-1910020-BN	↑10500lm/2800lm↓	↑80W/20W↓	3000/4000/6000K
BFRF-1910020-BD	↑10500lm/2800lm↓	↑80W/20W↓	3000/4000/6000K
BFRF-1910020-CD	↑10500lm/1900lm↓	↑80W/20W↓	3000~5700K
BFRF-1910020-CC	↑10500lm/1900lm↓	↑80W/20W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION



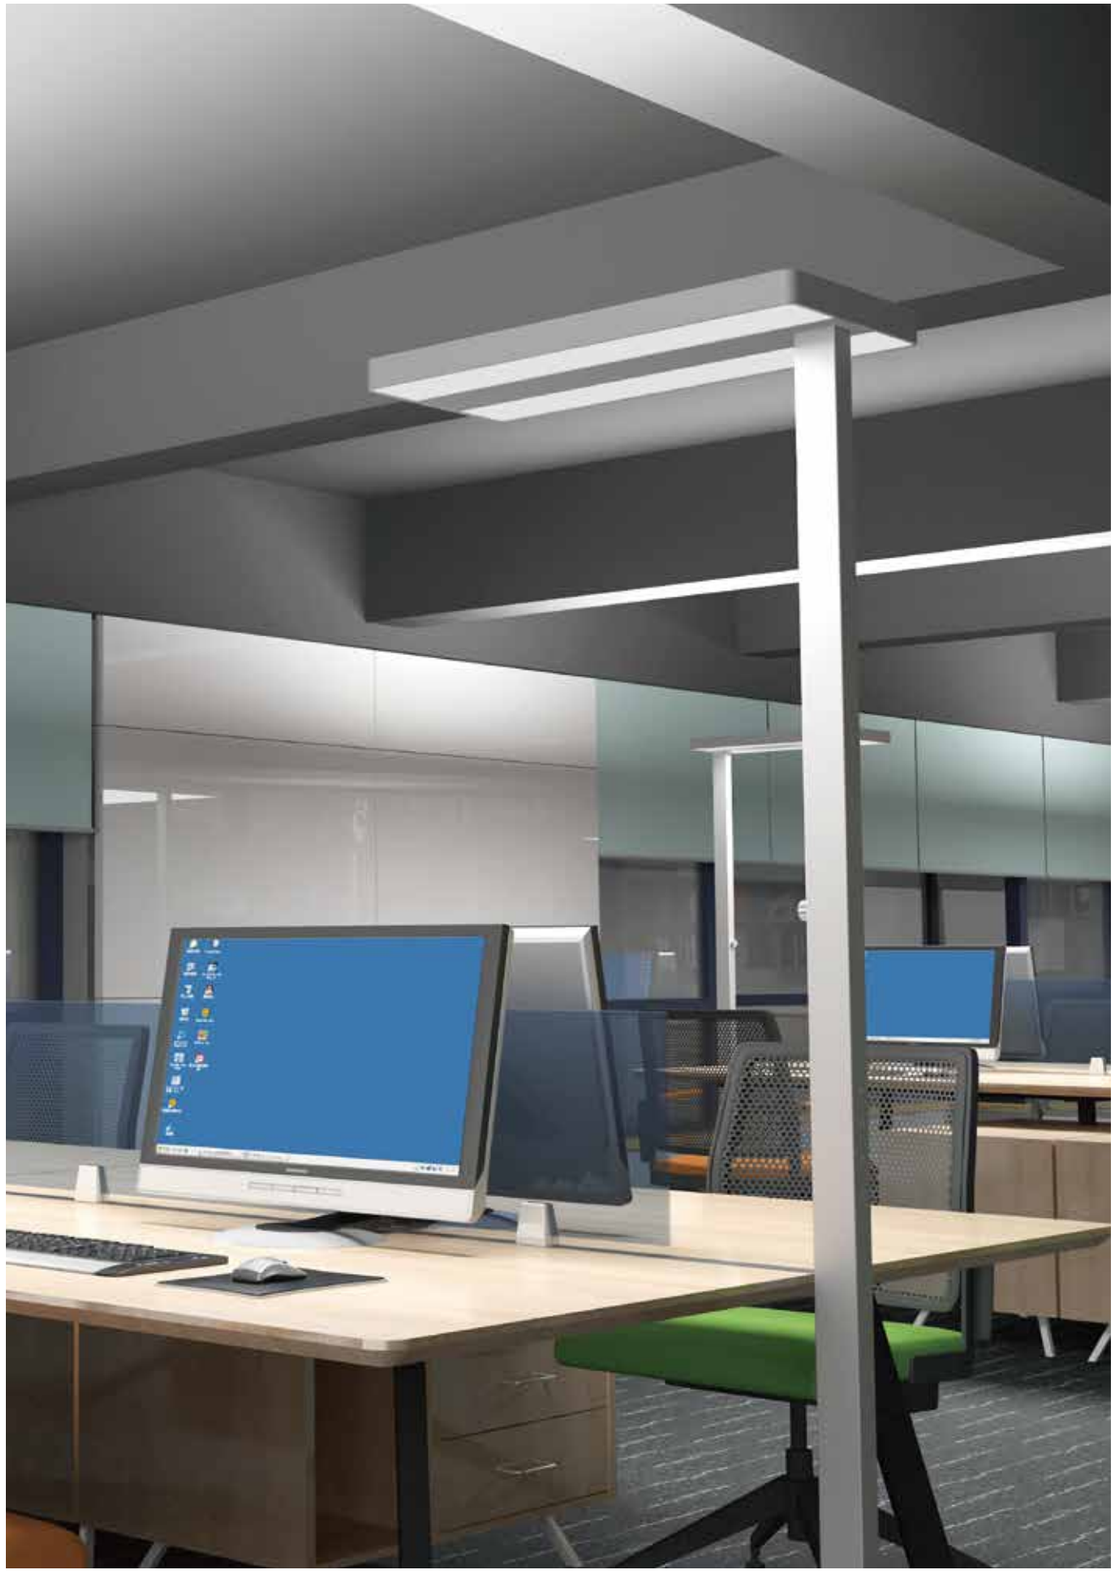

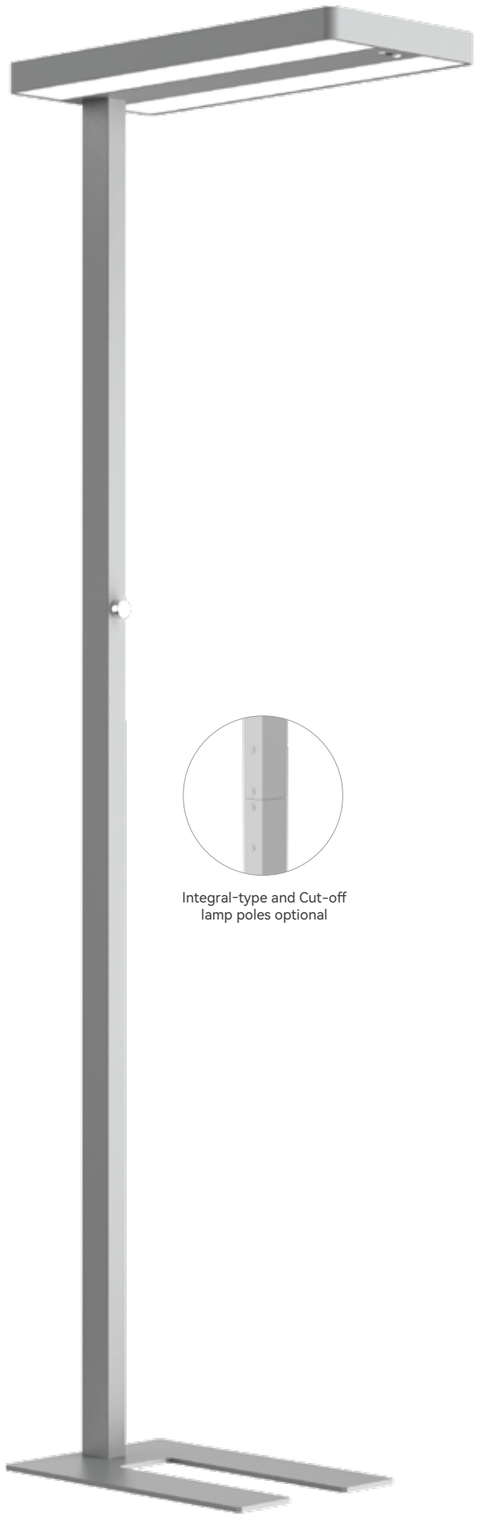

Integral-type and Cut-off lamp poles optional

HOMEC 3.0/HOMEO 3.0

APPLICATIONS:
Open-plan office, individual office, etc.


IP20 | <19 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH LE | CE | RoHS



High light efficiency reach 145LM/W



Daylight sensor Motion sensor



Cut-Off Pole, Good for shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BHOJ-1906030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOJ-1906030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOJ-1906030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOJ-1908040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOJ-1908040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOJ-1908040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOJ-1908020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOJ-1908020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOJ-1908020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION









Integral-type and Cut-off lamp poles optional

NITEC 3.0/NITEO 3.0

APPLICATIONS:
Open-plan office, individual office, etc.


IP20 | <19 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS



High light efficiency reach 145LM/W



UGR<19, uniform and healthy lighting



Cut-Off Pole, Good for shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNIJ-1906030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIJ-1906030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIJ-1906030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIJ-1908040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIJ-1908040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIJ-1908040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIJ-1908020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIJ-1908020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIJ-1908020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION










ROMI-F

APPLICATIONS:
Open-plan office, individual office, etc.

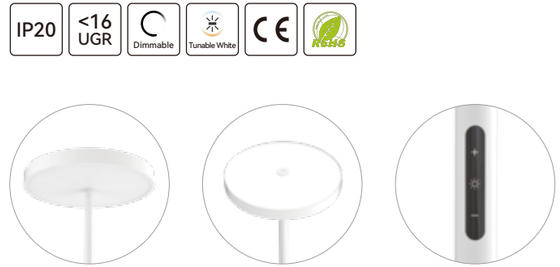

Microprism diffuser
UGR<16

Lumen efficiency
up to 120LM/W

Touch panel dimming


PRODUCT PARAMETERS

Luminaire Wattage	80W	
Luminous Flux	9645lm	9122lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	CCT
BROF-1908040-BN	↑6105lm/3540lm↓	↑40W/40W↓	3000/4000/6000K
BROF-1908040-CN	↑5750lm/3372lm↓	↑40W/40W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION



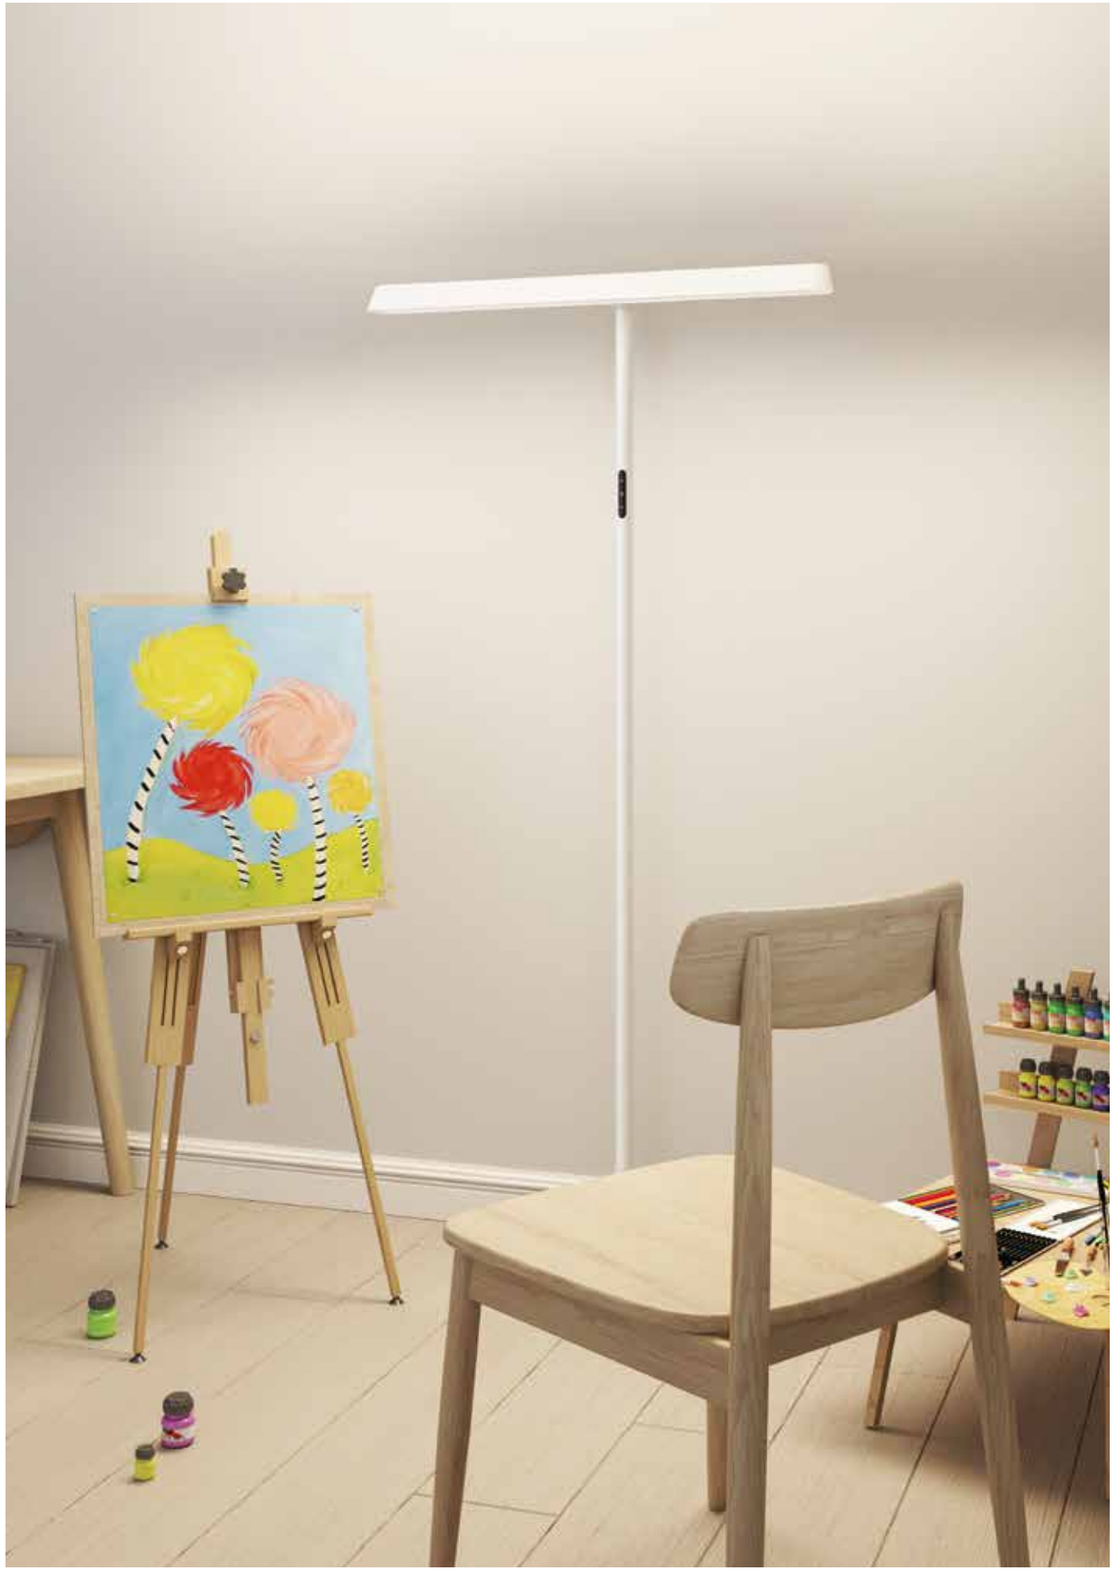



FIT-F

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | CE | RoHS



Direct and indirect light, with full-reflective polarized optic solution, UGR<18 anti-glare design;



78cm lamp head design, delivers superior workplane illuminance uniformity;



Independent touch panel dimming control for direct and indirect light, smooth and comfortable;


PRODUCT PARAMETERS

Luminaire Wattage	60W	
Luminous Flux	5530lm	
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	NO	Motion sensor
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFAJ-1606030-BN-02	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K
BFAJ-1606030-BM-02	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION



SPECIFIC OFFICE LIGHTING








COFFEE-R

APPLICATIONS:
Negotiation rooms, small meeting rooms,
breakout areas and other office areas.
Living room, bedrooms and study rooms.

IP20 | <10 UGR | Dimmable | Tunable White | TUYA | CE | ROHS



95% Indirect light,
lumen efficiency
up to 135LM/W



Convenient installation



Cut-Off Pole (Optional)


PRODUCT PARAMETERS

Luminaire Wattage	45W	
Luminous Flux	6400lm	5850lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming / Bluetooth dimming (TUYA)(optional)	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BCRJ-1904500-BN-03	↑6400lm	↑45W	3000/4000/6000K
BCRJ-1904500-CN-03	↑5850lm	↑45W	3000~5700K
BCRJ-1904500-WN-03	↑6400lm	↑45W	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION



DESK FIXED LUMINAIRES



Equo-T



ELFOO-T 2.0



LENO-T 2.0



MAYE-TR 2.0
MAYE-TS 2.0



HOMET 3.0




NITET 3.0



FIT-T

Luminaire Wattage	80W	80W	80W	80W/ 100W	60W/ 80W	60W/ 80W	60W
Luminous Flux	10800lm	10800lm	11600lm	11200lm/ 11516lm/ 15000lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	5530lm
UGR	<12	<12	<6	<18/ <14/ <13	<16/ <19/ <11	<16/ <19/ <11	<18
optics	↑155° / 75°↓	↑155° / 75°↓or ↑155° / 50°↓	↑115° / 50°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑100°/70°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Knob dimming	Touch panel dimming
Sensor	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor/ Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Daylight sensor & Motion sensor Casambi / Meshle	Motion sensor
Colours							



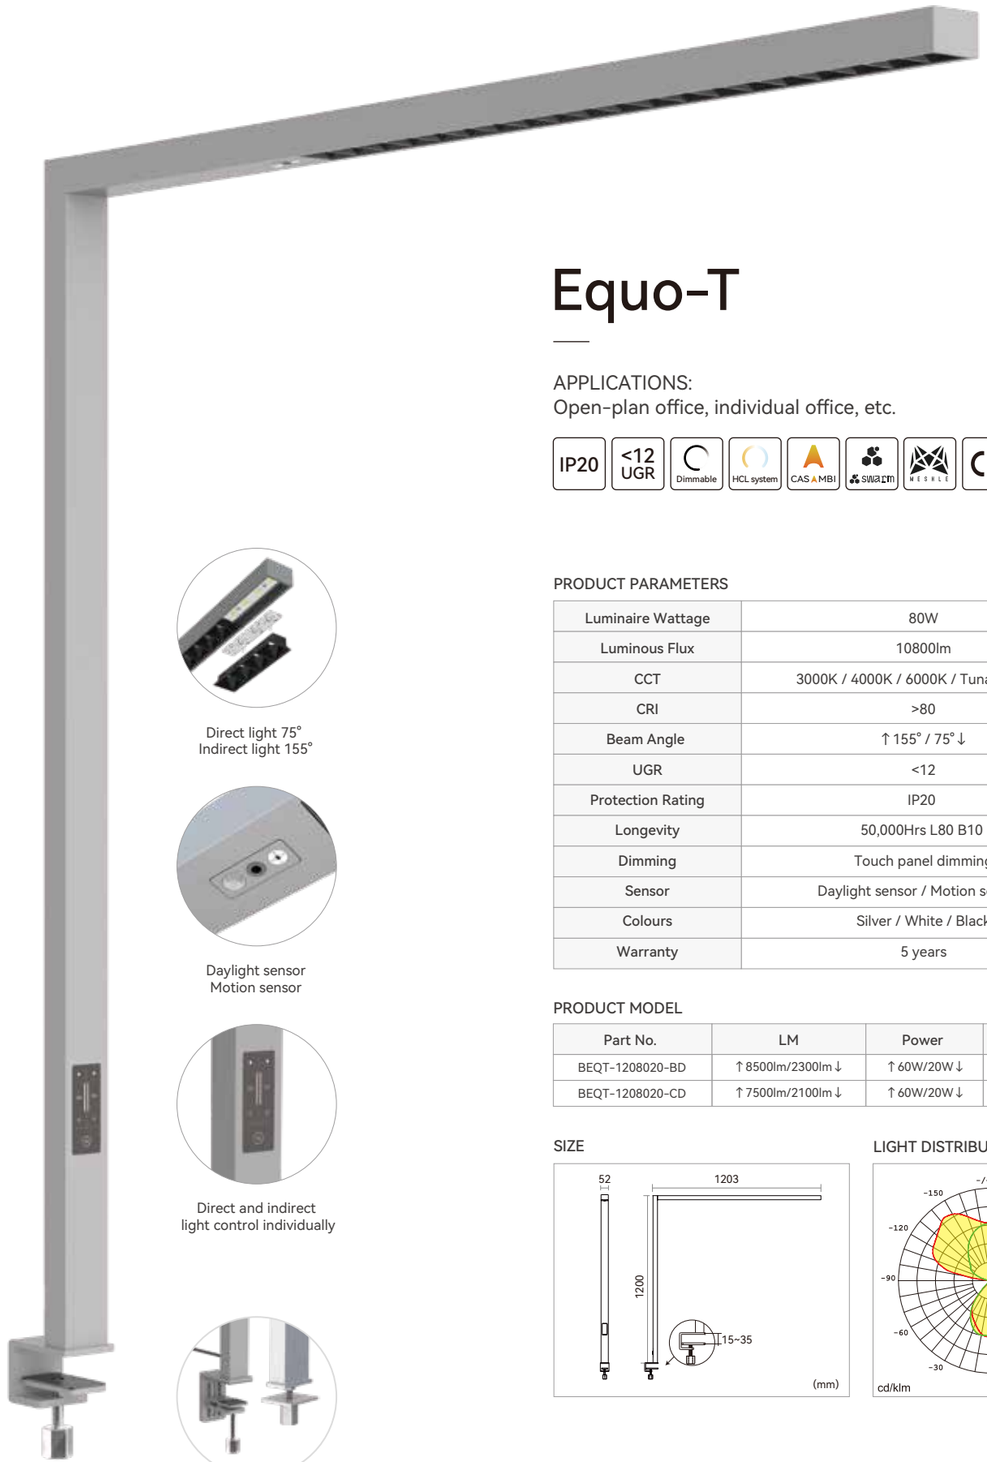

Equo-T

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <12 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS

Direct light 75°
Indirect light 155°

Daylight sensor
Motion sensor

Direct and indirect
light control individually

PRODUCT PARAMETERS


Luminaire Wattage	80W
Luminous Flux	10800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑155° / 75°↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL


Part No.	LM	Power	CCT
BEQT-1208020-BD	↑8500lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BEQT-1208020-CD	↑7500lm/2100lm↓	↑60W/20W↓	3000~5700K

SIZE

LIGHT DISTRIBUTION





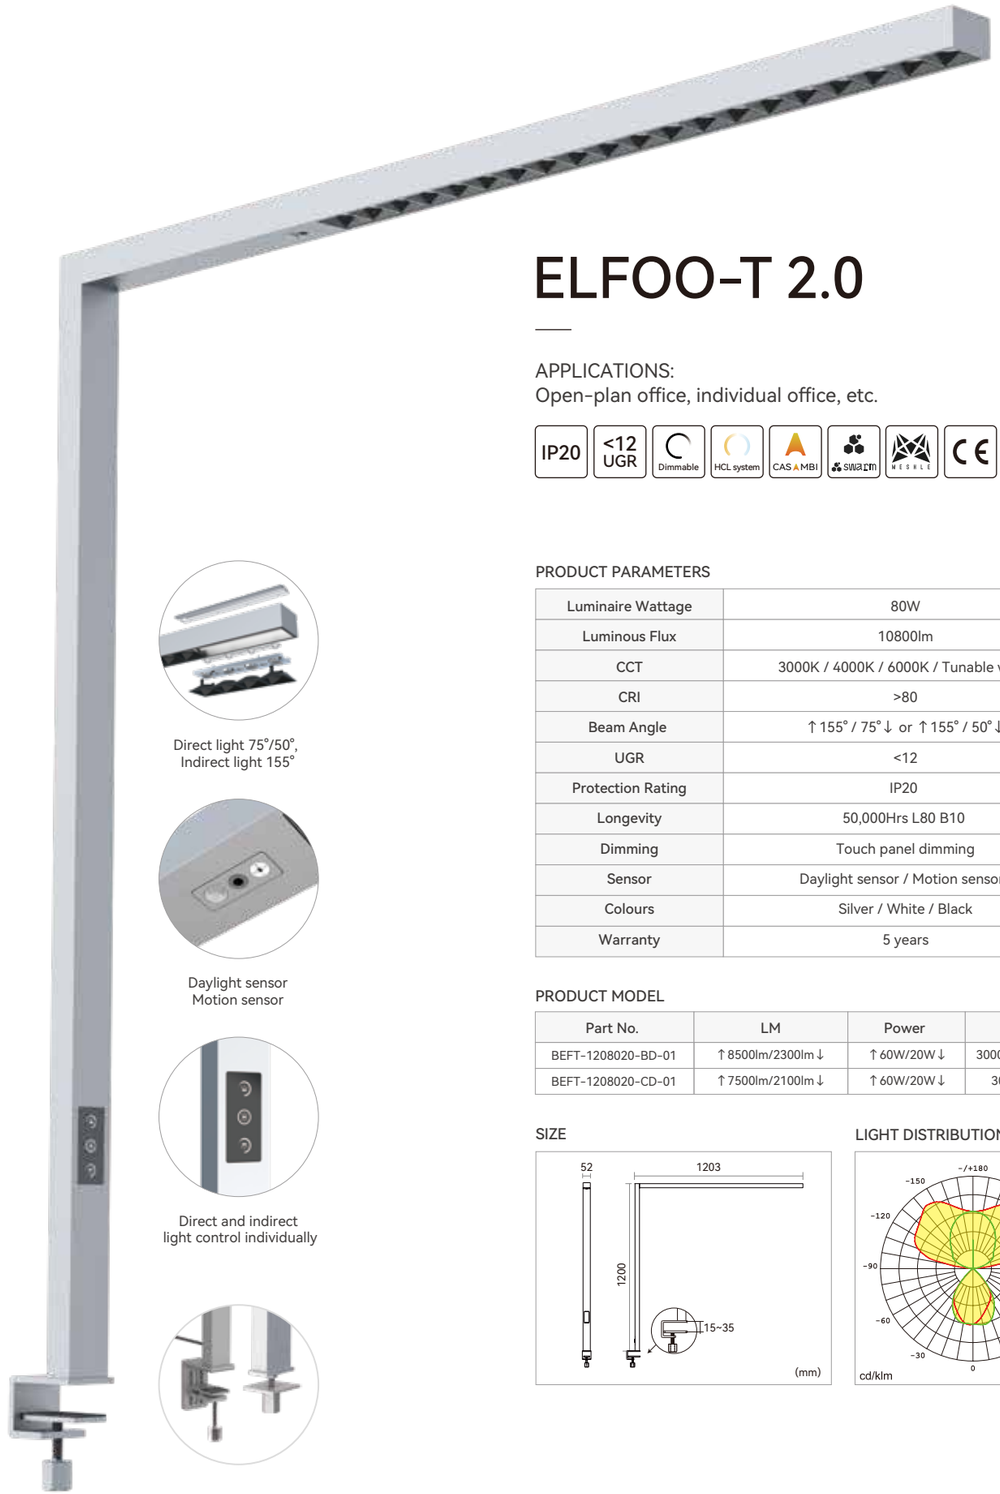

ELFOO-T 2.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <12 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS

Direct light 75°/50°,
Indirect light 155°

Daylight sensor
Motion sensor

Direct and indirect
light control individually

PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑155° / 75°↓ or ↑155° / 50°↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL


Part No.	LM	Power	CCT
BEFT-1208020-BD-01	↑8500lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BEFT-1208020-CD-01	↑7500lm/2100lm↓	↑60W/20W↓	3000~5700K

SIZE

LIGHT DISTRIBUTION

SPECIFIC OFFICE LIGHTING



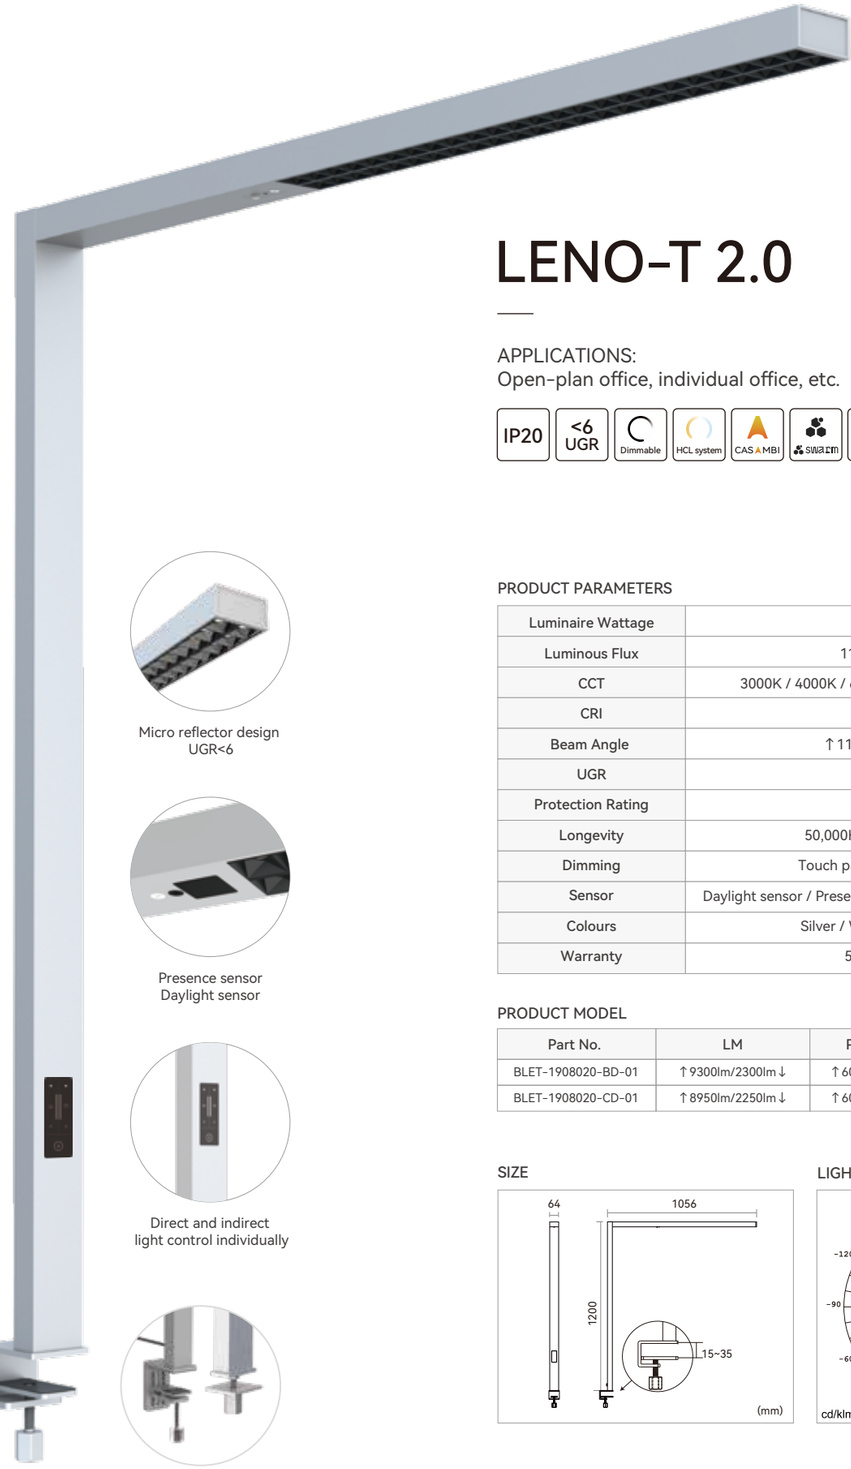

LENO-T 2.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <6 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS

Micro reflector design
UGR<6

Presence sensor
Daylight sensor

Direct and indirect
light control individually

PRODUCT PARAMETERS


Luminaire Wattage	80W
Luminous Flux	11600lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑115° / 50°↓
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Presence sensor or Motion sensor
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL


Part No.	LM	Power	CCT
BLET-1908020-BD-01	↑9300lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BLET-1908020-CD-01	↑8950lm/2250lm↓	↑60W/20W↓	3000~5700K

SIZE

LIGHT DISTRIBUTION





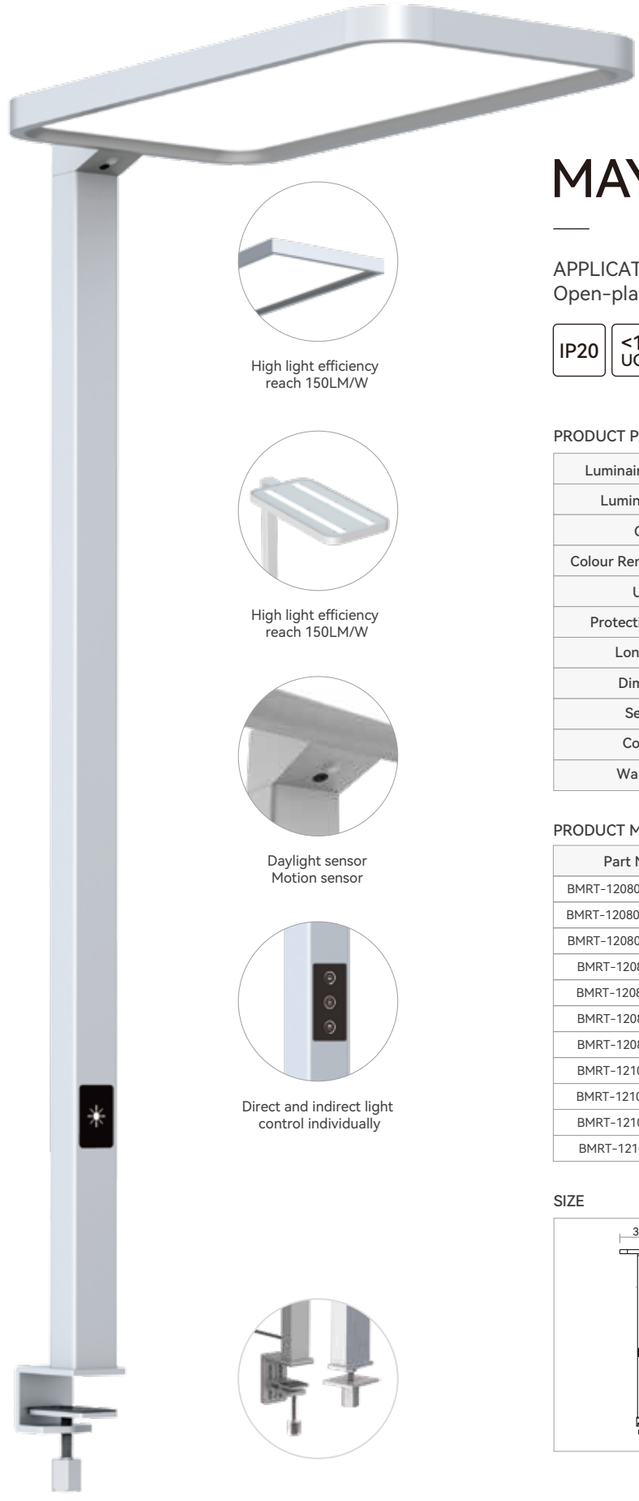

High light efficiency
reach 150LM/W

High light efficiency
reach 150LM/W

Daylight sensor
Motion sensor

Direct and indirect light
control individually

MAYE-TR/MAYE-TS 2.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BMRT-1208040-BN-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRT-1208040-BM-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRT-1208040-BD-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRT-1208022-BN	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRT-1208022-BM	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRT-1208022-BD	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRT-1208022-CD	↑8200lm/2200lm↓	↑58W/22W↓	3000~5700K
BMRT-1210020-BN	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRT-1210020-BM	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRT-1210020-BD	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRT-1210020-CD	↑11050lm/2500lm↓	↑80W/20W↓	3000~5700K

SIZE




LIGHT DISTRIBUTION







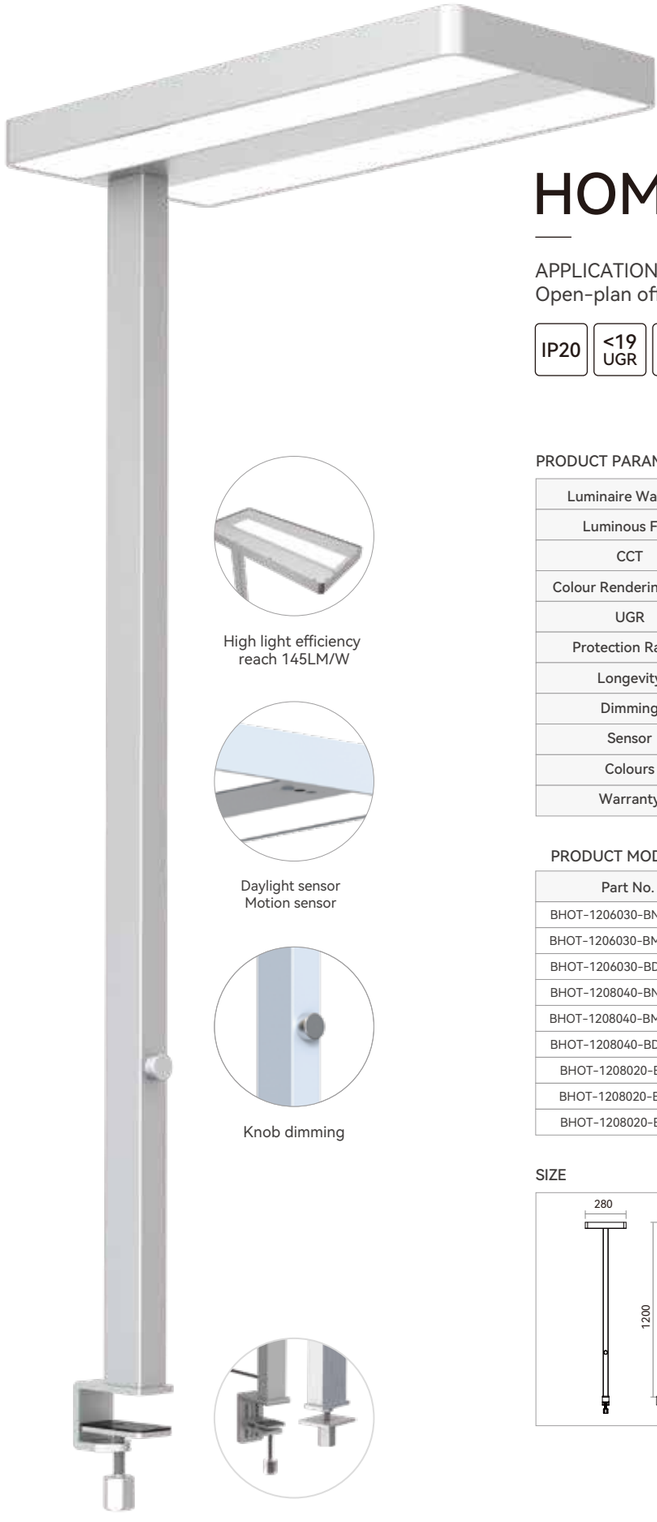

High light efficiency
reach 145LM/W

Daylight sensor
Motion sensor

Knob dimming

HOMET 3.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <19 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BHOT-1206030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOT-1206030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOT-1206030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOT-1208040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOT-1208040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOT-1208040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOT-1208020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOT-1208020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOT-1208020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K


SIZE



LIGHT DISTRIBUTION





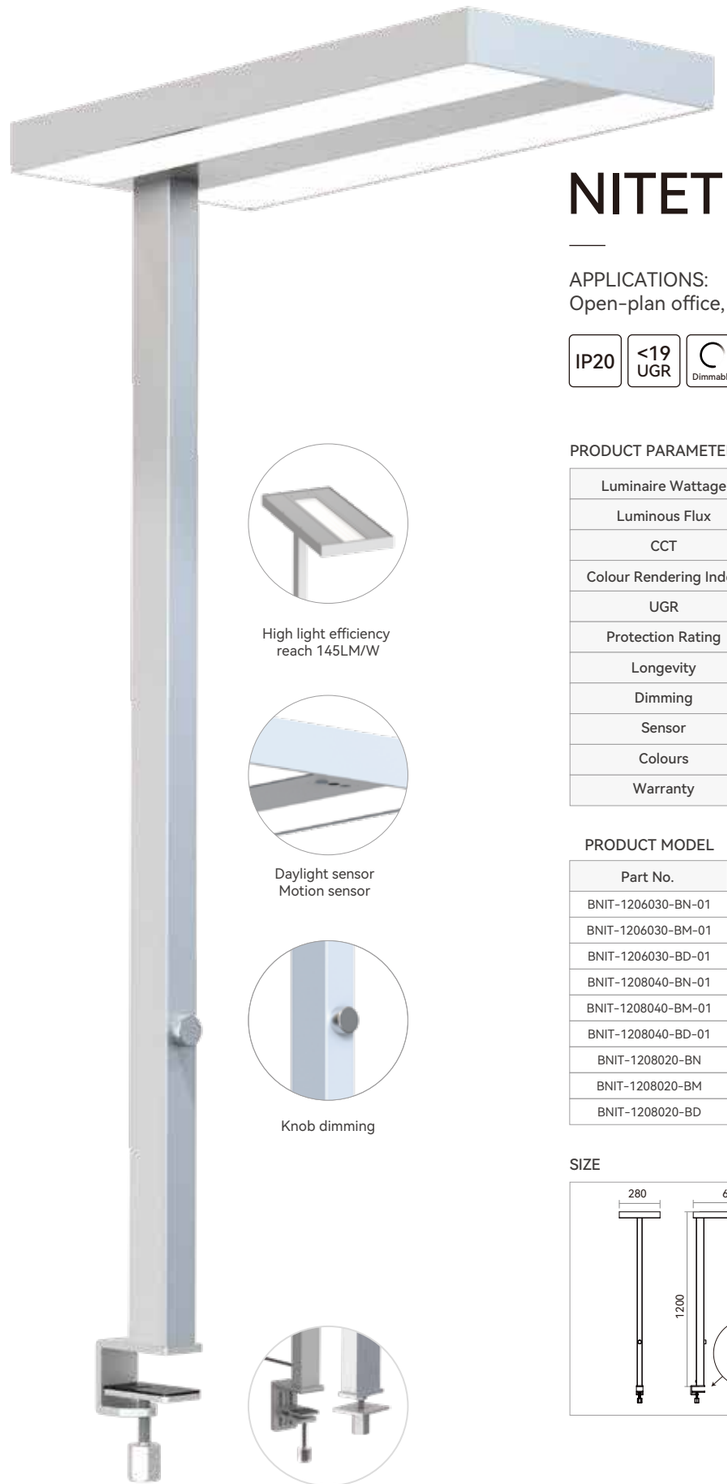

High light efficiency
reach 145LM/W

Daylight sensor
Motion sensor

Knob dimming

NITET 3.0

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <19 UGR | Dimmable | HCL system | CASAMBI | SWARM | MESH | CE | RoHS

PRODUCT PARAMETERS


Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BNIT-1206030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIT-1206030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIT-1206030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIT-1208040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIT-1208040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIT-1208040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIT-1208020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIT-1208020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIT-1208020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K

SIZE

LIGHT DISTRIBUTION



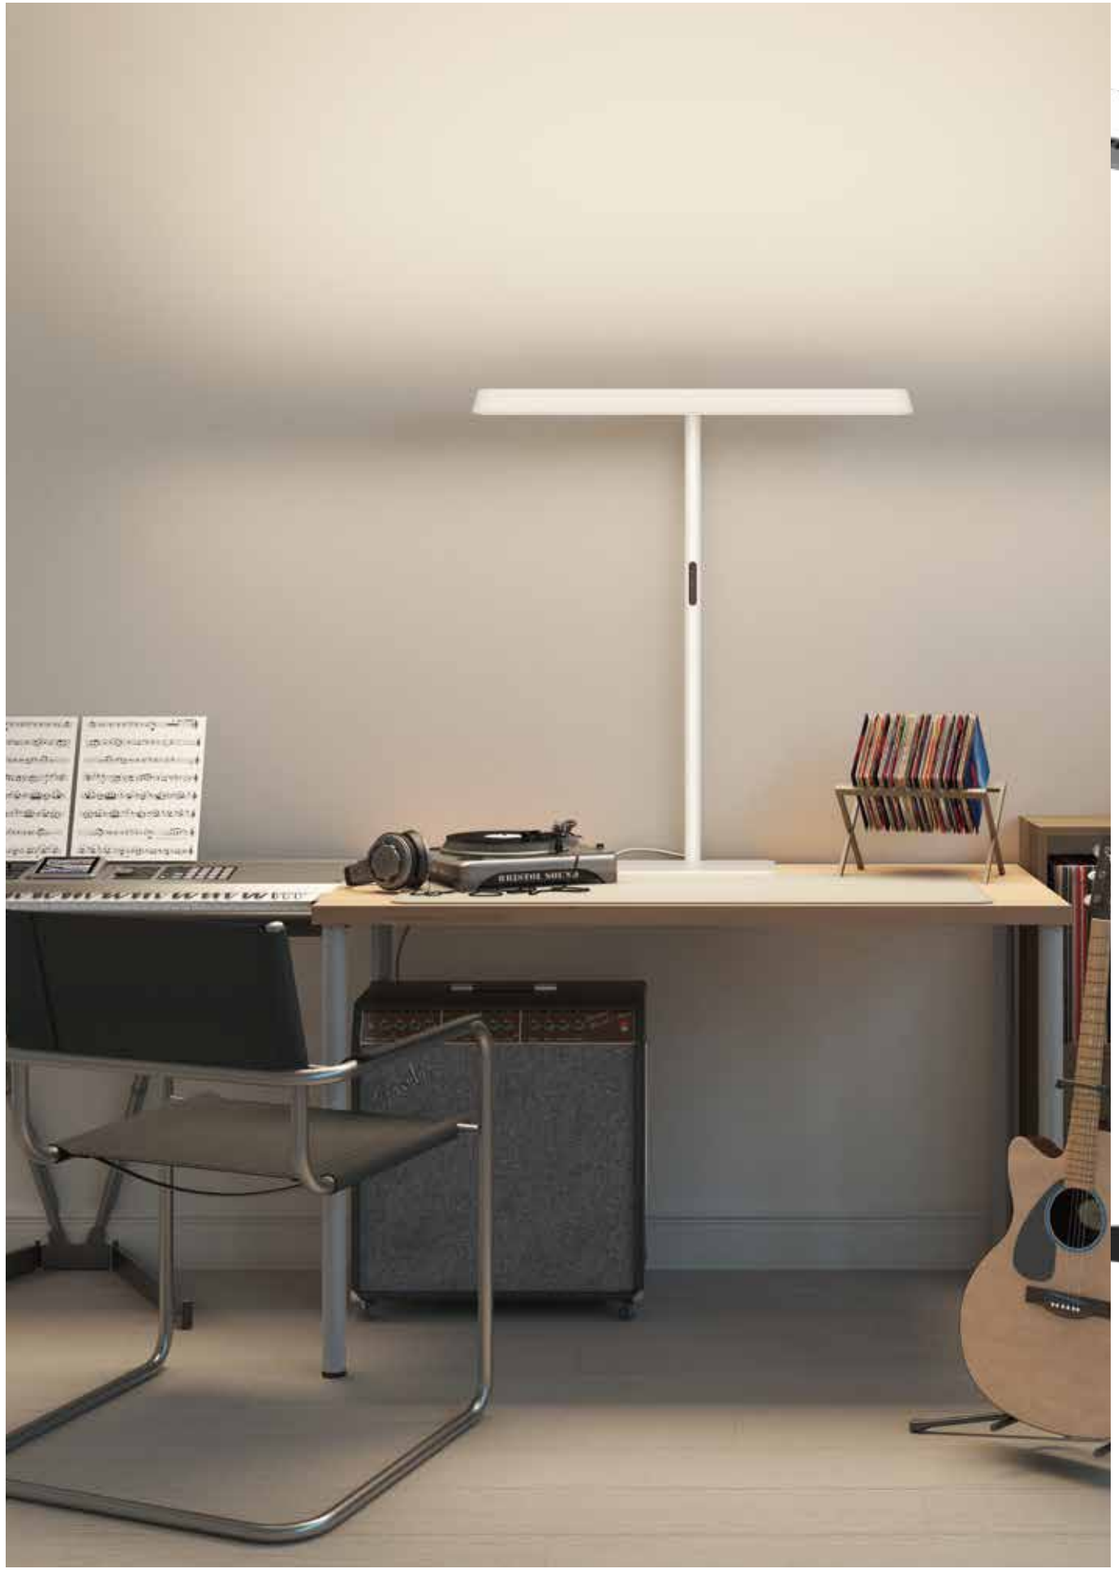

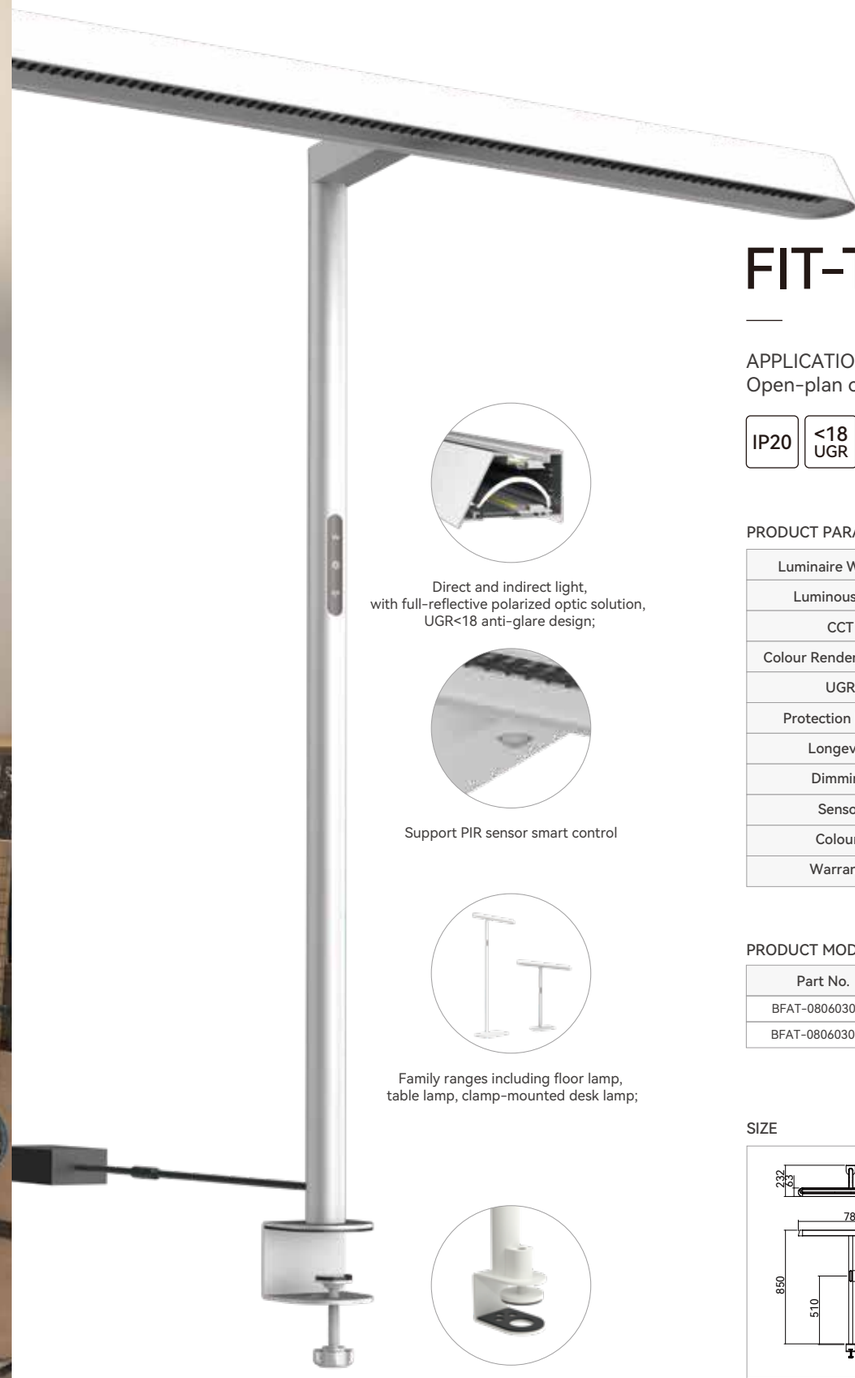

Direct and indirect light,
with full-reflective polarized optic solution,
UGR<18 anti-glare design;

Support PIR sensor smart control

Family ranges including floor lamp,
table lamp, clamp-mounted desk lamp;

FIT-T

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | CE | RG1&6


PRODUCT PARAMETERS

Luminaire Wattage	60W	
Luminous Flux	5530lm	
CCT	3000K / 4000K / 6000K	
Colour Rendering Index	>80	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	NO	Motion sensor
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFAT-0806030-BN	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K
BFAT-0806030-BM	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION



PENDANT LUMINAIRES



Linx 50



Dawn-P0



Dawn-P1



Equo-P



MAYE Pro-PS



ROMAN-P0



ROMAN-P1

Luminaire Wattage	20W↓ / 25W↓ 50W / 60W	60W/ 80W	60W/ 70W	50W / 60W power switchable 60W / 70W power switchable	60W/ 70W	60W/ 70W	60W/ 80W/ 120W
Luminous Flux	2600lm↓ / 3250lm↓ 7100lm / 8520lm	10000lm/ 12800lm	9600lm/ 10700lm	6750lm (50W) / 8000lm (60W) 8100lm (60W) / 9300lm (70W)	8850lm/ 9600lm/ 11200lm	8910lm/ 10400lm	9000lm/ 12000lm/ 18000lm
UGR	<19 / <22 / <24	<13	<17	<13	<16	<15	<6
optics	Lens / Prismatic / Diffuser	↑115° / 70°↓	↑115° / 70°↓	↑155° / 75°↓	↑115° / 80°↓	↑115° / 60°↓	↑115° / 60°↓
CRI	>80 / >90	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K(CCT switchable) 2700-6500K	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / DALI	On/off / DALI	On/off / DALI	On/off / DALI	On/off / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours							


PENDANT LUMINAIRES



EZY-P



ROMI-P 2.0




FREE-P 2.0



KEY-P



ELFOO-P




LENO-P2

Luminaire Wattage	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable	50W/ 60W	30W/ 40W/ 50W/ 60W	50W/ 60W	50W/ 60W
Luminous Flux	2500lm/ 3240lm 4000lm/ 5300lm 6720lm/ 8400lm	2160lm/ 2880lm 3900lm/ 5200lm 6720lm/ 8400lm	6400lm/ 7200lm	3600lm/ 4800lm/ 6250lm/ 7500lm/ 6500lm/ 7800lm	6300lm/ 7400lm	6250lm/ 7500lm
UGR	<19/ <22	<19	<15	<19/ >19	<15	<6
optics	↑110° / 90°↓	↑95°/ 95°↓	↑115° / 80°↓	↑110° / 90°↓	↑140° / 75°↓ or ↑140° / 50°↓	↑115° / 50°↓
CRI	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / DALI	On/off / DALI	On/off / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours						

LINX 50

Linx linear series is a linear lighting system that is highly modularized; Modules are connected via interlocking terminals, allowing for rapid structural and electrical link without light leakage. This series offers flexible applications, with multiple optical options available for light modules lamp modules and various linkable modules to meet diverse linkable requirements. Equipped with intelligent Sensor modules and emergency lighting functions, it is ideal for efficient and intelligent lighting applications in modern office environments.

A variety of linkable accessories are available, making linkable applications highly flexible.



NO LIGHT LEAKAGE



SMART PLUG & PLAY


DALI / Casambi / Meshle modular sensor





HIGHLY MODULAR

Full-Range Solutions

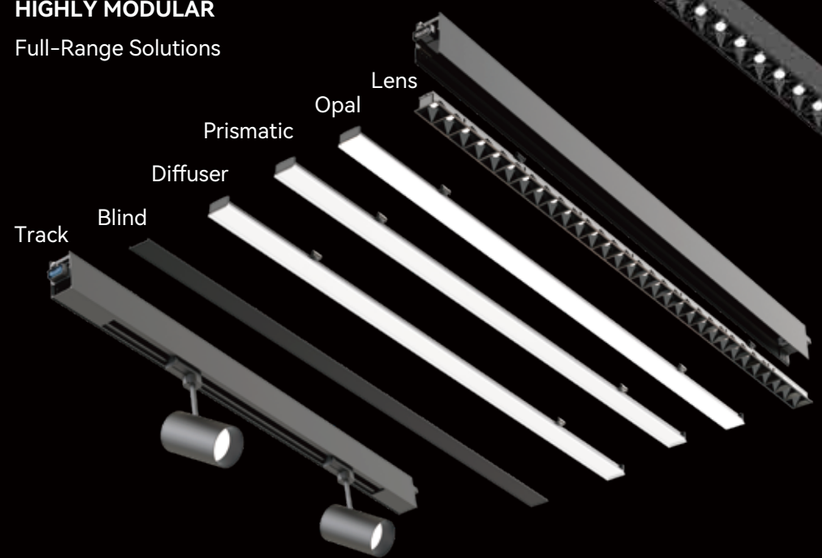



FAST LINK

Electrical & structural integration for rapid cascading.





SPECIFIC OFFICE LIGHTING

LINX 50


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Modularization + rapid link;
- Seamless linkable light leakage.
- The optical module can be detached independently for easy maintenance. The standard track module offers strong expandability.
- A variety of linkable accessories are available, making linkable applications highly flexible.

SIZE



PRODUCT PARAMETERS

Luminaire Wattage	20W↓	25W↓	50W	60W
Luminous Flux	2600lm↓	3250lm↓	7100lm	8520lm
CCT	3000K/4000K(CCT switchable) / 2700~6500K			
CRI	>80/>90			
optics	Lens / Prismatic / Diffuser			
UGR	<19 / <22 / <24			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

PRODUCT MODEL

Part No.	LM	Power	Function
LN5L-122020-O-218401	2600lm↓	20W↓	On/off
LN5L-122020-D-218401	2600lm↓	20W↓	DALI dimming
LN5L-152525-O-218401	3250lm↓	25W↓	On/off
LN5L-152525-D-218401	3250lm↓	25W↓	DALI dimming
LN5L-125020-O-218401	↑4500lm/2600lm↓	↑30W/20W↓	On/off
LN5L-125020-D-218401	↑4500lm/2600lm↓	↑30W/20W↓	DALI dimming
LN5L-156025-O-218401	↑4970lm/3550lm↓	↑35W/25W↓	On/off
LN5L-156025-D-218401	↑4970lm/3550lm↓	↑35W/25W↓	DALI dimming



Dawn-P0


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <13 UGR | Dimmable | CE | RoHS



- Up to 160 lm/W for greater energy savings.
- Anti glare lens solution with side micro-light, low glare and high visual comfort
- UGR < 13， compliant with professional lighting design requirements;
- 4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;








PRODUCT PARAMETERS

Luminaire Wattage	60W	80W
Luminous Flux	10000lm	12800lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑115° / 70°↓	
UGR	<13	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BDAP0-6506024-NN	↑6700lm/3300lm↓	↑36W/24W↓	On/off
BDAP0-6506024-DN	↑6700lm/3300lm↓	↑36W/24W↓	DALI dimming
BDAP0-9008032-NN	↑7800lm/5000lm↓	↑48W/32W↓	On/off
BDAP0-9008032-DN	↑7800lm/5000lm↓	↑48W/32W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION





Dawn-P1

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <17 UGR | Dimmable | CE | RoHS



- Up to 160 lm/W for greater energy savings.
- Anti glare lens solution with side micro-light, low glare and high visual comfort
- UGR < 17， compliant with professional lighting design requirements;
- 4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;




PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	9600lm	10700lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑115° / 70°↓	
UGR	<17	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BDAP1-1206024-NN	↑5450lm/4150lm↓	↑36W/24W↓	On/off
BDAP1-1206024-DN	↑5450lm/4150lm↓	↑36W/24W↓	DALI dimming
BDAP1-1507028-NN	↑6000lm/4700lm↓	↑42W/28W↓	On/off
BDAP1-1507028-DN	↑6000lm/4700lm↓	↑42W/28W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION







Equo-P

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <13 UGR | Dimmable | CE | RoHS

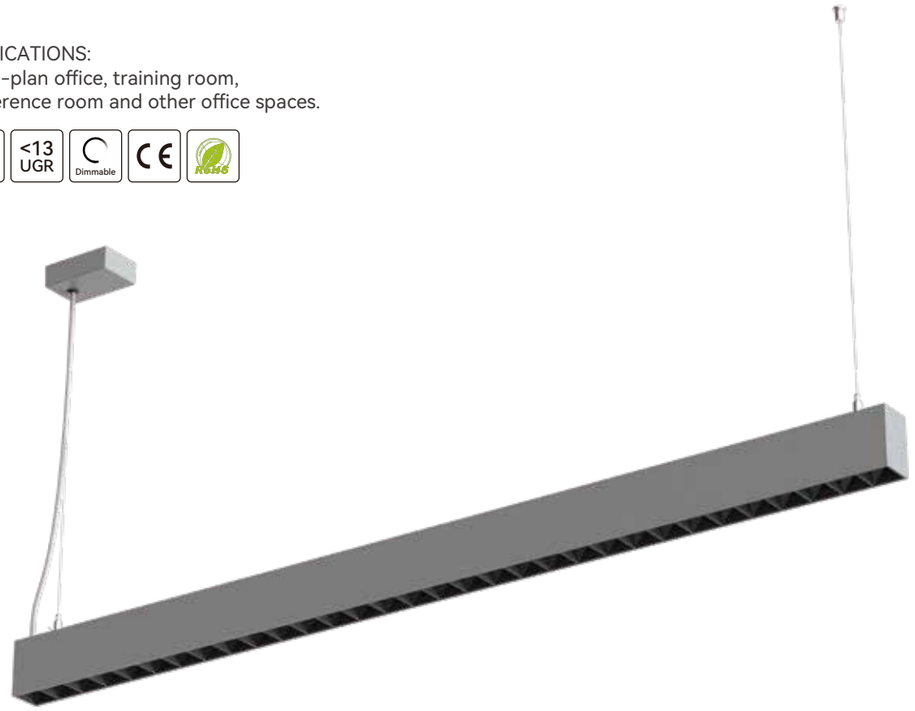

- Indirect light with 155° wide beam angle lens for uniform illumination
- Direct light with 75° wide beam angle lens and anti-glare shield design, symmetrical and well-mixed lighting effect
- CCT switchable and Wattage switchable
- Seamless linkable design with no light leakage



PRODUCT PARAMETERS

Luminaire Wattage	50W/ 60W power switchable	60W/ 70W power switchable
Luminous Flux	6750lm/ 8000lm	8100lm/ 9300lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑155° / 75°↓	
UGR	<13	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEQP-1206024-NN	↑4350lm/2400lm↓	50W(↑30W/20W↓)	On/off
BEQP-1206024-DN	↑5200lm/2800lm↓	60W(↑36W/ 24W↓)	DALI dimming
BEQP-1507028-NN	↑5400lm/2700lm↓	60W(↑36W/ 24W↓)	On/off
BEQP-1507028-DN	↑6150lm/3150lm↓	70W(↑42W/ 28W↓)	DALI dimming

SIZE



LIGHT DISTRIBUTION






MAYE Pro-PS


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

150 LM/W | <16 UGR | Dimmable

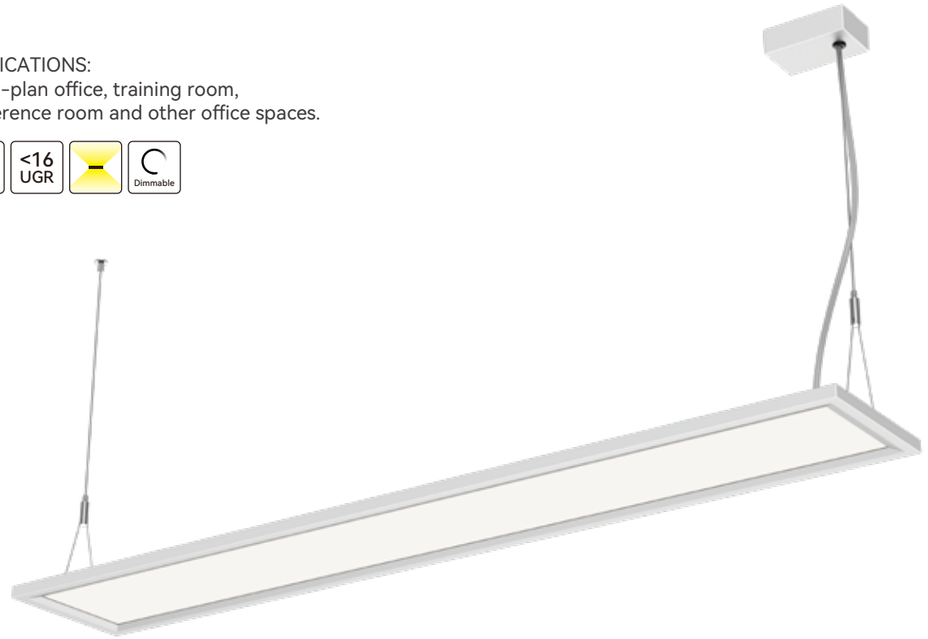



Large light-distribution area for direct light 15mm ultra-thin edge design



Structural polarization design for indirect light



Support linkable luminaires


PRODUCT PARAMETERS

Luminaire Wattage	60W	60W	70W
Luminous Flux	8850lm	9600lm	11200lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑115° / 80°↓		
UGR	<16		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	Function
BMPP-1206030-NN	↑5080lm/3770lm↓	↑30W/30W↓	On/off
BMPP-1206030-DN	↑5080lm/3770lm↓	↑30W/30W↓	DALI dimming
BMPP-1206020-NN	↑7180lm/2420lm↓	↑40W/20W↓	On/off
BMPP-1206020-DN	↑7180lm/2420lm↓	↑40W/20W↓	DALI dimming
BMPP-1507028-NN	↑7600lm/3600lm↓	↑42W/28W↓	On/off
BMPP-1507028-DN	↑7600lm/3600lm↓	↑42W/28W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



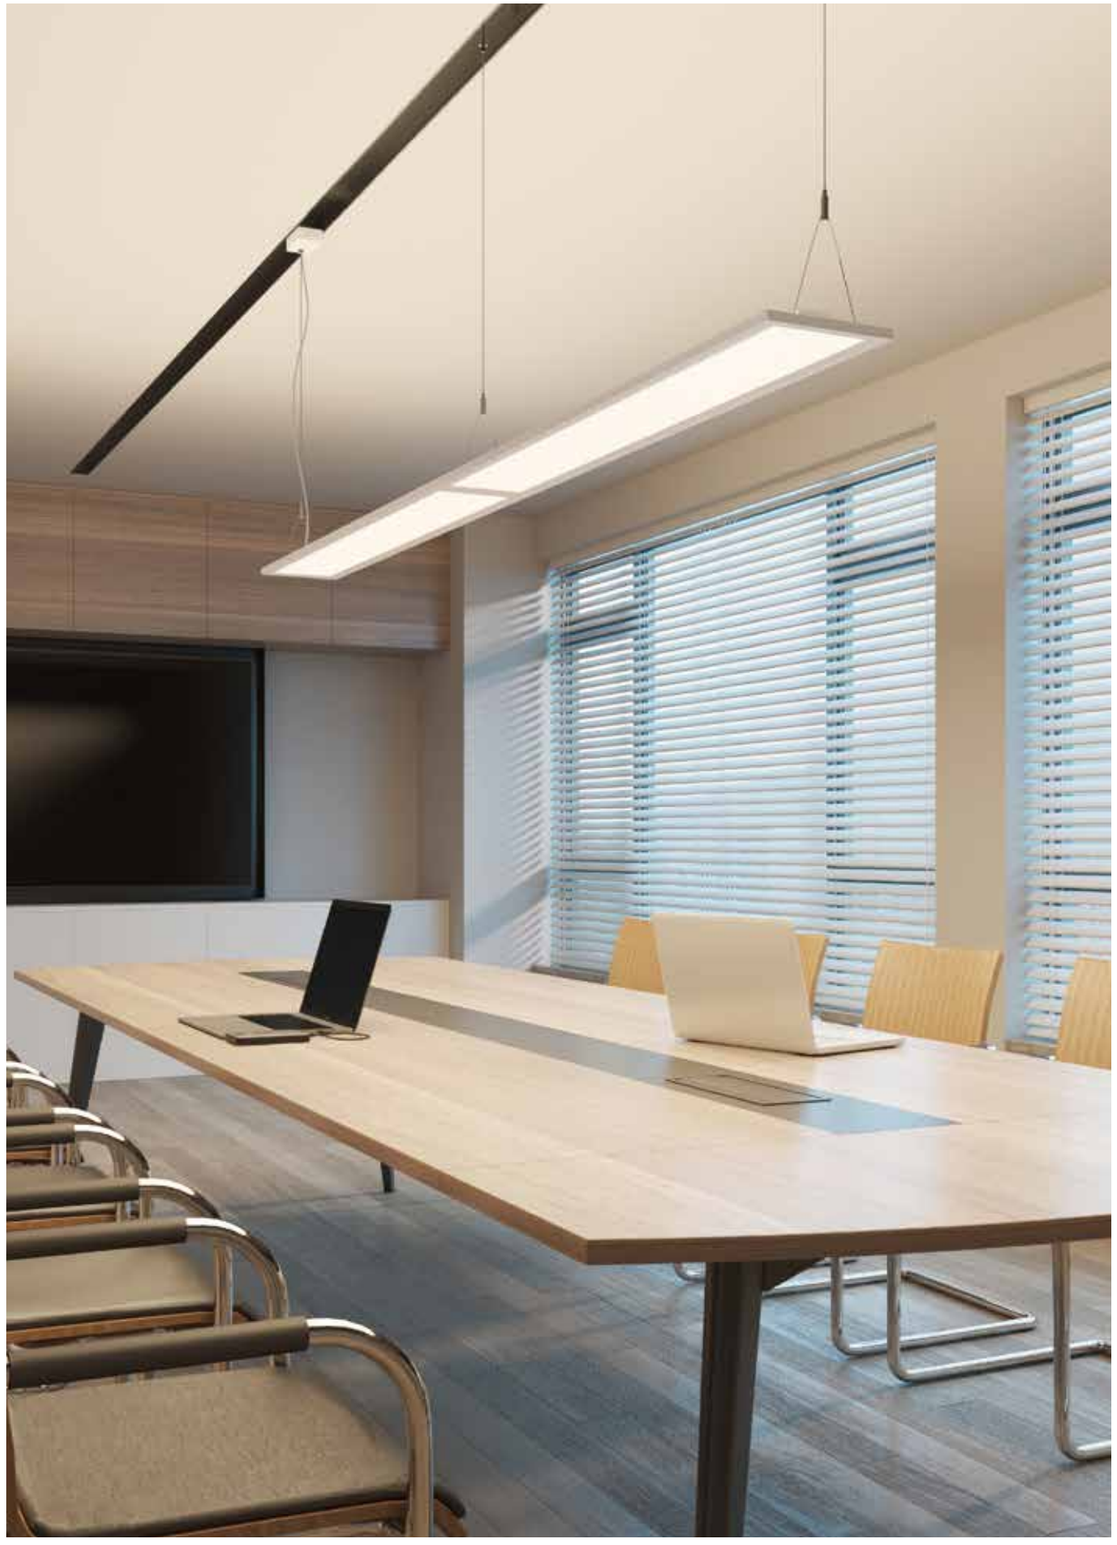


SPECIFIC OFFICE LIGHTING

ROMAN-P0

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <15 UGR | Dimmable | CE | RoHS

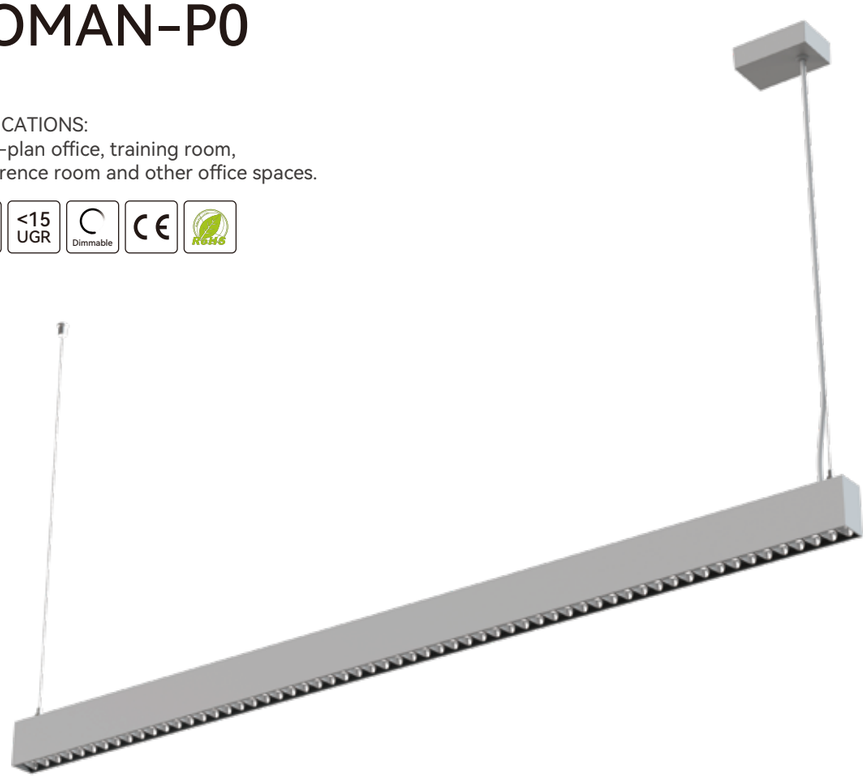

- Simple design style, rich texture
- Light efficiency up to 148lm/W
- Support DALI and 1-10V dimming






PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	8910lm	10400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑115° / 60°↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	Function
BROP0-1206024-NN	↑6010lm/2900lm↓	↑36W/24W↓	On/off
BROP0-1206024-VN	↑6010lm/2900lm↓	↑36W/24W↓	1-10V dimming
BROP0-1206024-DN	↑6010lm/2900lm↓	↑36W/24W↓	DALI dimming
BROP0-1507028-NN	↑7000lm/3400lm↓	↑42W/28W↓	On/off
BROP0-1507028-VN	↑7000lm/3400lm↓	↑42W/28W↓	1-10V dimming
BROP0-1507028-DN	↑7000lm/3400lm↓	↑42W/28W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



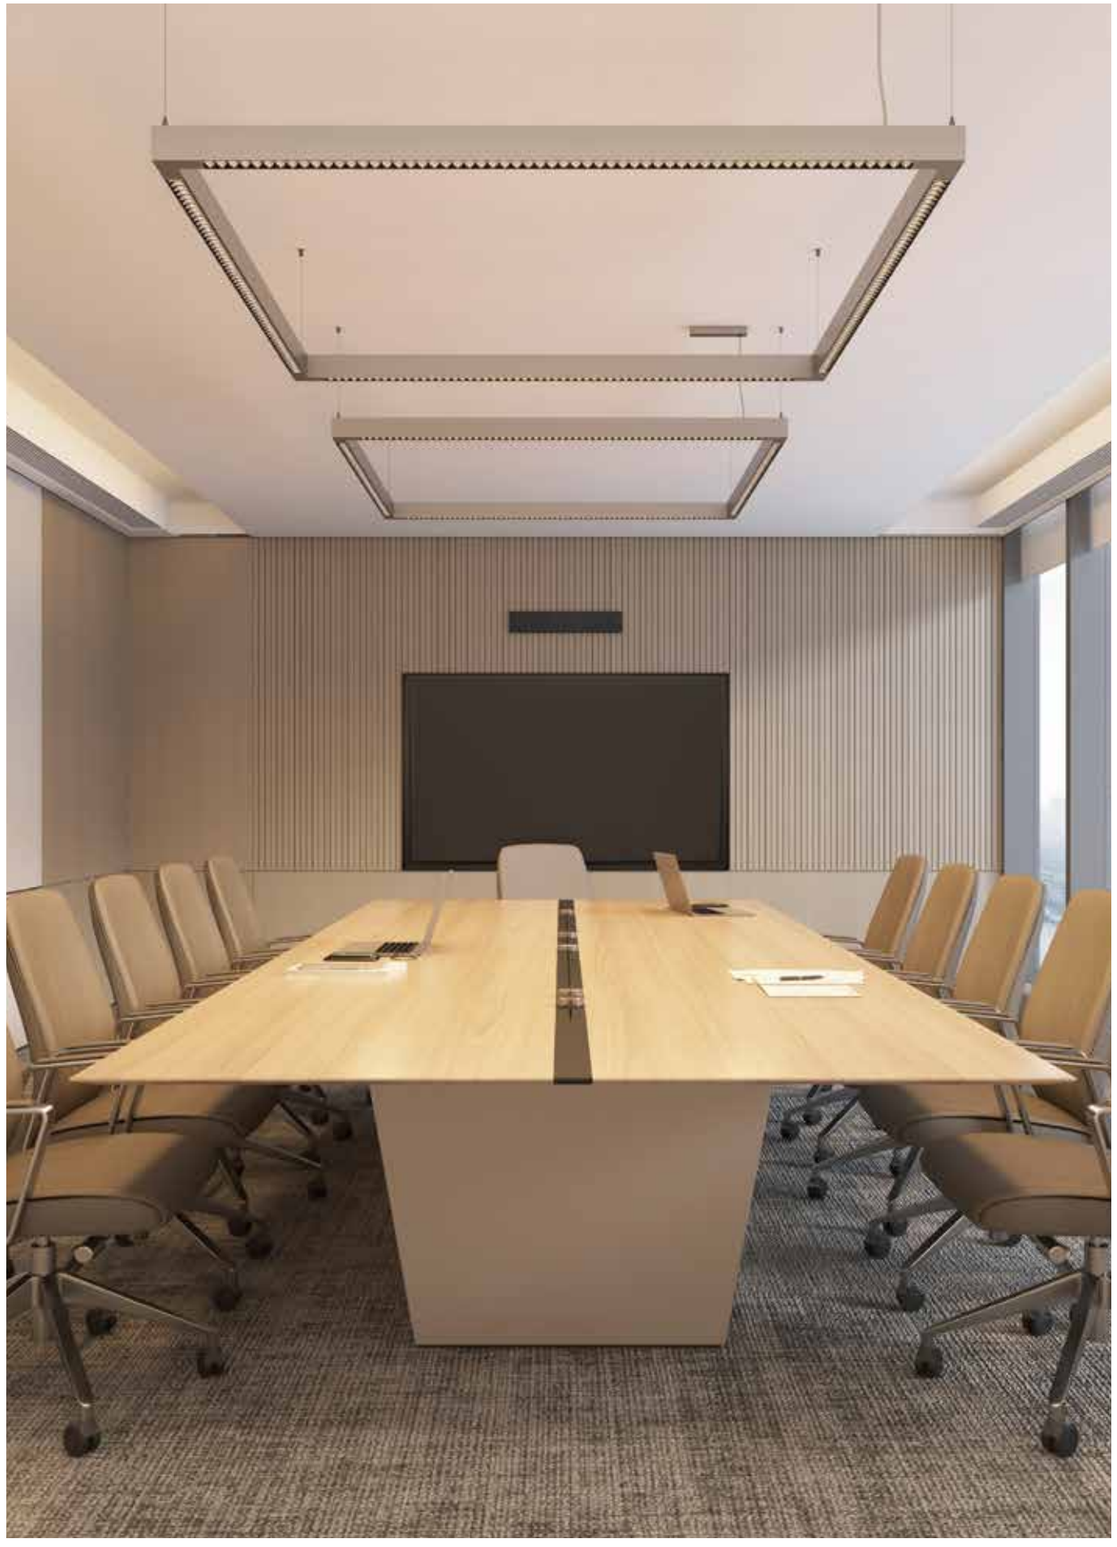

ROMAN-P1

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | <6 UGR | Dimmable | CE | RoHS



- Simple design style, rich texture
- Light efficiency up to 150lm/W
- Support DALI and 1-10V dimming






PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	120W
Luminous Flux	9000lm	12000lm	18000lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑115° / 60°↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / 1-10V dimming / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
BROP1-6506024-NN	↑5900lm/3100lm↓	↑36W/24W↓	On/off
BROP1-6506024-VN	↑5900lm/3100lm↓	↑36W/24W↓	1-10V dimming
BROP1-6506024-DN	↑5900lm/3100lm↓	↑36W/24W↓	DALI dimming
BROP1-9008032-NN	↑7800lm/4200lm↓	↑48W/32W↓	On/off
BROP1-9008032-VN	↑7800lm/4200lm↓	↑48W/32W↓	1-10V dimming
BROP1-9008032-DN	↑7800lm/4200lm↓	↑48W/32W↓	DALI dimming
BROP1-1212048-NN	↑12000lm/6000lm↓	↑72W/48W↓	On/off
BROP1-1212048-VN	↑12000lm/6000lm↓	↑72W/48W↓	1-10V dimming
BROP1-1212048-DN	↑12000lm/6000lm↓	↑72W/48W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



SPECIFIC OFFICE LIGHTING



EZY-P

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Individual uplight module design, flexible and easy to manage inventory
- CCT switchable and Wattage switchable
- Up to 140 lm/W for greater energy savings.
- 350/450/600mm diameter available
- Pole-pendant / wire-pendant optional







LIGHT DISTRIBUTION

Luminaire Wattage	18W/ 24W power switchable	30W/ 40W power switchable	48W/ 60W power switchable
Luminous Flux	2500lm/ 3240lm	4000lm/ 5300lm	6720lm/ 8400lm
CCT	3000K / 4000K CCT switchable		
CRI	>80		
UGR	<19/ <22		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL
UGR<19

Part No.	LM	Power	Function
BEZP-3502417-NN-01	↑990lm/ 1510lm↓	18W(↑6W/12W↓)	On/off
BEZP-3502417-DN-01	↑1140lm/ 2100lm↓	24W(↑7W/ 17W↓)	DALI dimming
BEZP-4504028-NN-01	↑1250lm/ 2750lm↓	30W(↑9W/ 21W↓)	On/off
BEZP-4504028-DN-01	↑1600lm/ 3700lm↓	40W(↑12W/ 28W↓)	DALI dimming
BEZP-6006042-NN-01	↑1500lm/ 5220lm↓	48W(↑14W/ 34W↓)	On/off
BEZP-6006042-DN-01	↑2400lm/ 6000lm↓	60W(↑18W/ 42W↓)	DALI dimming


PRODUCT MODEL
UGR<22

Part No.	LM	Power	Function
BEZP-3502424-NN-01	2250lm↓/ 3000lm↓	18W↓/ 24W↓	On/off
BEZP-3502424-DN-01			DALI dimming
BEZP-4504040-NN-01	3900lm↓/ 5200lm↓	30W↓/ 40W↓	On/off
BEZP-4504040-DN-01			DALI dimming
BEZP-6006060-NN-01	6480lm↓/ 8100lm↓	48W↓/ 60W↓	On/off
BEZP-6006060-DN-01			DALI dimming

SIZE



LIGHT DISTRIBUTION



SPECIFIC OFFICE LIGHTING



ROMI-P 2.0

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Light efficiency up to 140lm/W
- The upper light section can be switched off independently
- Microprism, UGR<19
- Extremely simple for installation and maintenance
- Come with several size Ø350 / Ø450 / Ø600




PRODUCT PARAMETERS

Luminaire Wattage	18W/ 24W power switchable	30W/ 40W power switchable	48W/ 60W power switchable
Luminous Flux	2160lm/2880lm	3900lm/5200lm	6720lm/8400lm
CCT	3000K/ 4000K (CCT switchable)		
CRI	>80		
UGR	<19		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
BROP-3502417-NN-01	↑800lm/ 1360lm↓	↑6W/ 12W↓	On/off
BROP-3502417-DN-01	↑950lm/ 1930lm↓	↑7W/ 17W↓	DALI dimming
BROP-4504028-NN-01	↑1300lm/ 2600lm↓	↑9W/ 21W↓	On/off
BROP-4504028-DN-01	↑1700lm/ 3500lm↓	↑12W/ 28W↓	DALI dimming
BROP-6006042-NN-01	↑1800lm/ 3940lm↓	↑14W/ 34W↓	On/off
BROP-6006042-DN-01	↑2300lm/ 6100lm↓	↑18W/ 42W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION








FREE-P 2.0

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <15 UGR | Dimmable | CE | RoHS

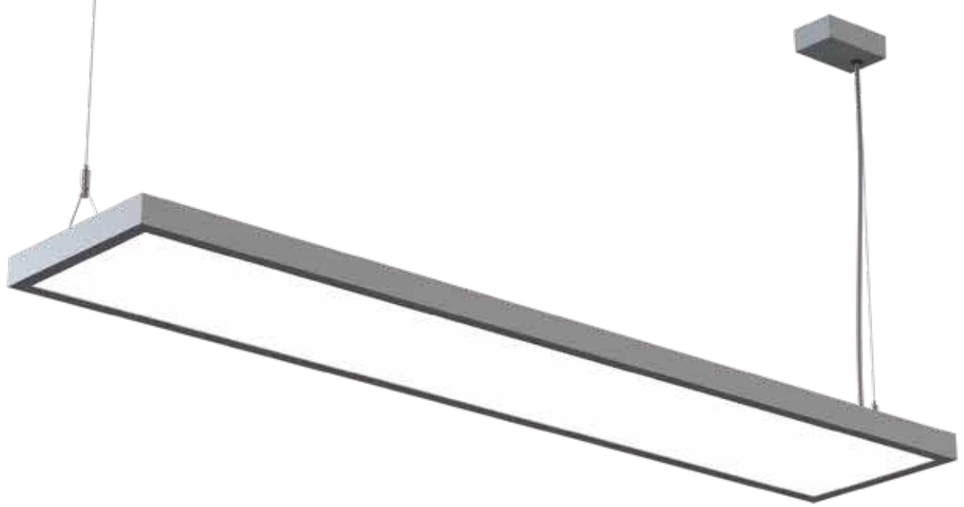



Microprism
UGR<15



Direct and indirect lighting with impressive light uniformity



CCT switchable


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6400lm	7200lm
CCT	3000/4000K(CCT switchable)	
CRI	>80	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BFRP-1205030-NN-01	↑3400lm/3000lm↓	↑20W/30W↓	On/off
BFRP-1205030-DN-01	↑3000lm/3000lm↓	↑20W/30W↓	DALI dimming
BFRP-1506036-NN-01	↑3900lm/3300lm↓	↑24W/36W↓	On/off
BFRP-1506036-DN-01	↑3900lm/3300lm↓	↑24W/36W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION









KEY-P

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | Dimmable | CE | RoHS

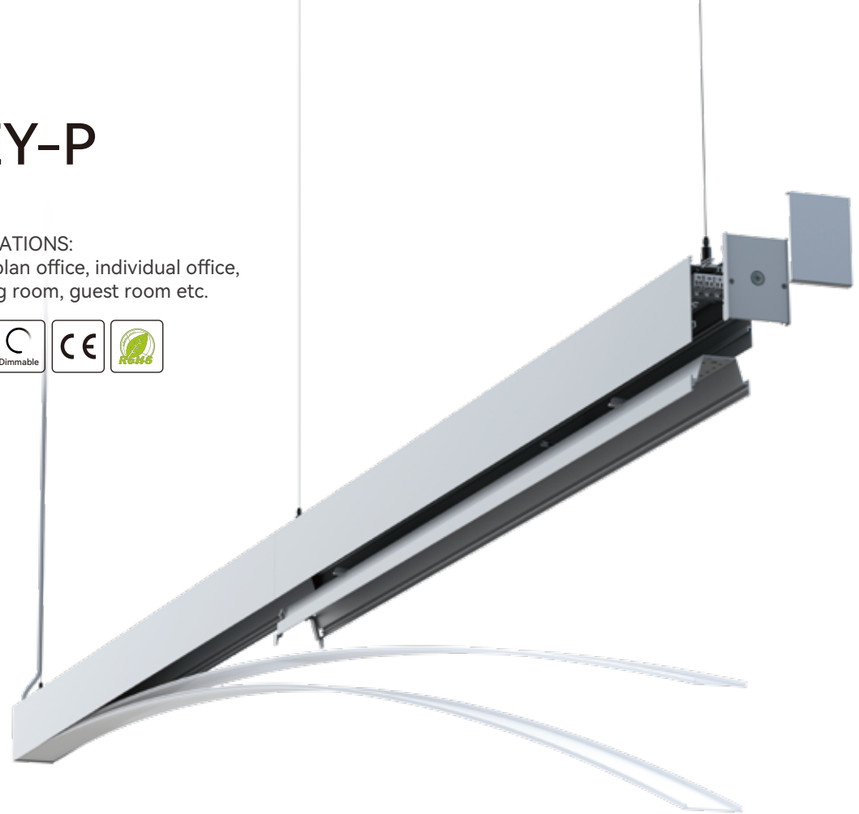



Light efficiency could be 130LM/W



Flexible microprism plate
Flexible diffuser




Linkable and no light leakage


PRODUCT PARAMETERS

Luminaire Wattage	30W	40W	50W		60W	
Luminous Flux	3600lm	4800lm	6250lm	6500lm	7500lm	7800lm
CCT	3000K / 4000K / 6000K					
CRI	>80					
Protection Rating	IP20					
Longevity	50,000Hrs L80 B10					
Function	On/off / 1-10V dimming / DALI dimming					
Colours	Silver / White / Black					
Warranty	5 years					

SIZE



LIGHT DISTRIBUTION



PRODUCT MODEL

UGR: <19

Part No.	LM	Power	Function
BKEP-1205015-NN	↑4550lm/1950lm↓	↑35W/15W↓	On/off
BKEP-1205015-VN	↑4550lm/1950lm↓	↑35W/15W↓	1-10V dimming
BKEP-1205015-DN	↑4550lm/1950lm↓	↑35W/15W↓	DALI dimming
BKEP-1506018-NN	↑5460lm/2340lm↓	↑42W/18W↓	On/off
BKEP-1506018-VN	↑5460lm/2340lm↓	↑42W/18W↓	1-10V dimming
BKEP-1506018-DN	↑5460lm/2340lm↓	↑42W/18W↓	DALI dimming

UGR: >19

Part No.	LM	Power	Function
BKEP-1205030-NN	↑2500lm/3750lm↓	↑20W/30W↓	On/off
BKEP-1205030-VN	↑2500lm/3750lm↓	↑20W/30W↓	1-10V dimming
BKEP-1205030-DN	↑2500lm/3750lm↓	↑20W/30W↓	DALI dimming
BKEP-1506036-NN	↑3000lm/4500lm↓	↑24W/36W↓	On/off
BKEP-1506036-VN	↑3000lm/4500lm↓	↑24W/36W↓	1-10V dimming
BKEP-1506036-DN	↑3000lm/4500lm↓	↑24W/36W↓	DALI dimming
BKEP-1203030-NN	3600lm↓	30W↓	On/off
BKEP-1203030-VN	3600lm↓	30W↓	1-10V dimming
BKEP-1203030-DN	3600lm↓	30W↓	DALI dimming
BKEP-1504040-NN	4800lm↓	40W↓	On/off
BKEP-1504040-VN	4800lm↓	40W↓	1-10V dimming
BKEP-1504040-DN	4800lm↓	40W↓	DALI dimming







ELFOO-P


APPLICATIONS:
Open-plan office, individual office,
cafetoria, training room, classroom, etc.

IP20 | <15 UGR | Dimmable | CE | RoHS

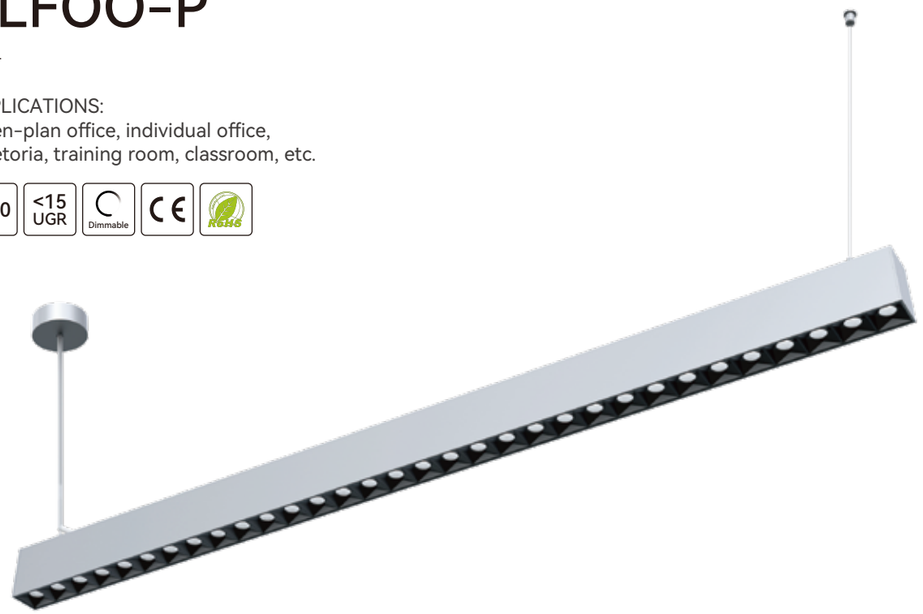




Wide beam angle with professional glare control design, UGR<15



140° upward light output to provide comfortable lighting for the space



No gap and no light come out from connection parts when linked together


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6300lm	7400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑140° / 75°↓ or ↑140° / 50°↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFP-1206024-NN	↑3500lm/2800lm↓	↑36W/24W↓	On/off
BEFP-1206024-VN	↑3500lm/2800lm↓	↑36W/24W↓	1-10V dimming
BEFP-1206024-DN	↑3500lm/2800lm↓	↑36W/24W↓	DALI dimming
BEFP-1507028-NN	↑4100lm/3300lm↓	↑42W/28W↓	On/off
BEFP-1507028-VN	↑4100lm/3300lm↓	↑42W/28W↓	1-10V dimming
BEFP-1507028-DN	↑4100lm/3300lm↓	↑42W/28W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION









LENO-P2

APPLICATIONS:
Open-plan office, individual office,
small meeting room, reception, etc.

IP20 | <6 UGR | Dimmable | CE | RoHS

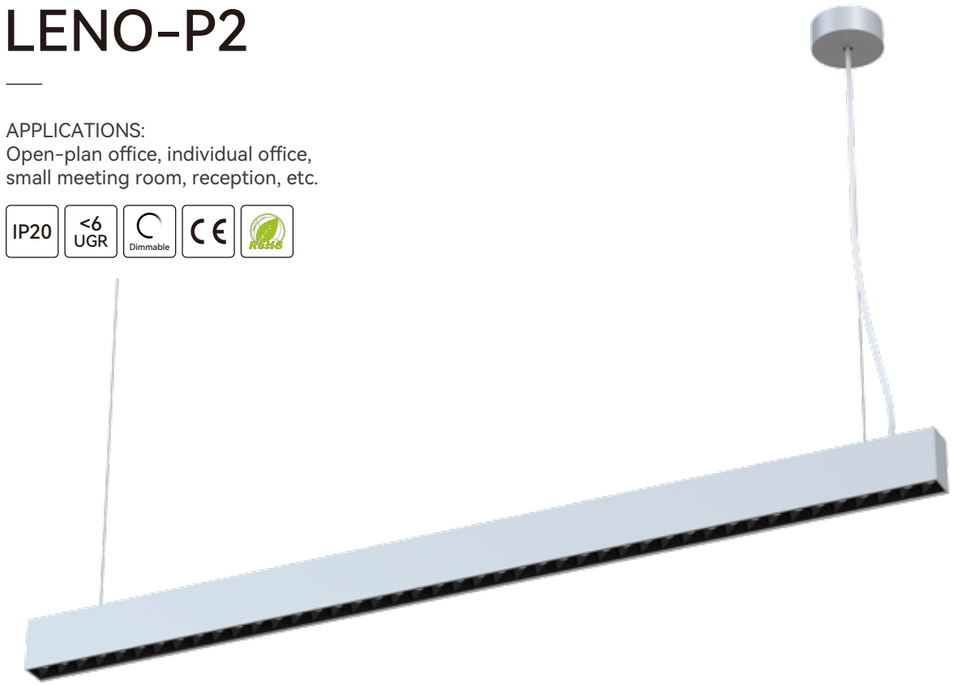




Micro reflector design
UGR<6



Linkable design



Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6250lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑115° / 50°↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEP2-1205025-NN	↑3350lm/2900lm↓	↑25W/25W↓	On/off
BLEP2-1205025-VN	↑3350lm/2900lm↓	↑25W/25W↓	1-10V dimming
BLEP2-1205025-DN	↑3350lm/2900lm↓	↑25W/25W↓	DALI dimming
BLEP2-1506030-NN	↑4000lm/3500lm↓	↑30W/30W↓	On/off
BLEP2-1506030-VN	↑4000lm/3500lm↓	↑30W/30W↓	1-10V dimming
BLEP2-1506030-DN	↑4000lm/3500lm↓	↑30W/30W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



SPECIFIC OFFICE LIGHTING





SURFACE MOUNTED LUMINAIRES

SPECIFIC OFFICE LIGHTING













	EQUO-C	FREE-C 2.0	EZY-C	ROMI-C 2.0	KEY-C	ELFOO-C
Luminaire Wattage	24W/ 30W power switchable 32W/ 40W power switchable	50W/ 60W	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable	40W/ 50W	30W/ 35W
Luminous Flux	2640lm/ 3300lm 3520lm/ 4400lm	6000lm/ 7200lm	2500lm/ 3240lm 4000lm/ 5300lm 6720lm/ 8400lm	2160lm/ 2880lm 3900lm/ 5200lm 6720lm/ 8400lm	4800lm/ 6000lm	3200lm/ 3600lm
UGR	<19	<19	<19/ <22	<19	<27	<18
optics	75°	80°	90°	↑95°/ 95°↓	90°	80°
CRI	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / DALI	On/off / DALI	On/off / DALI / Radar Sensor	On/off / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours						


EQUO-C

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.



- Light efficiency up to 110lm/W
- Lmax ≥ 65°<1000 cd/m²
- CCT switchable and Wattage switchable






LIGHT DISTRIBUTION

Luminaire Wattage	24W/ 30W power switchable	32W/ 40W power switchable
Luminous Flux	2640lm/ 3300lm	3520lm/ 4400lm
CCT	3000K / 4000K CCT switchable	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEQC-1203030-NN	2640lm↓/ 3300lm↓	24W↓/ 30W↓	On/off
BEQC-1203030-DN			DALI dimming
BEQC-1504040-NN	3520lm↓/ 4400lm↓	32W↓/ 40W↓	On/off
BEQC-1504040-DN			DALI dimming

SIZE



LIGHT DISTRIBUTION





FREE-C 2.0

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Up to 120 lm/W for greater energy savings.
- CCT switchable and Wattage switchable.




PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6000lm	7200lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BFRC-1205040-NN-01	↑1600lm/4400lm↓	↑10W / 40W↓	On/off
BFRC-1205040-DN-01	↑1600lm/4400lm↓	↑10W / 40W↓	DALI dimming
BFRC-1506048-NN-01	↑1900lm/5300lm↓	↑12W / 48W↓	On/off
BFRC-1506048-DN-01	↑1900lm/5300lm↓	↑12W / 48W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION







EZY-C

APPLICATIONS:
Open-plan office, individual office,
meeting room, guest room etc.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Individual uplight module design, flexible and easy to manage inventory.
- CCT switchable and Wattage switchable.
- Up to 140 lm/W for greater energy savings.
- 350/450/600mm diameter available.





LIGHT DISTRIBUTION

Luminaire Wattage	18W/ 24W power switchable	30W/ 40W power switchable	48W/ 60W power switchable
Luminous Flux	2500lm/ 3240lm	4000lm/ 5300lm	6720lm/ 8400lm
CCT	3000K / 4000K CCT switchable		
CRI	>80		
UGR	<19/ <22		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming / Radar Sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL
UGR<19

Part No.	LM	Power	Function
BEZC-3502417-NN-01	↑990lm/ 1510lm↓	18W(↑6W/12W↓)	On/off
BEZC-3502417-WM-01	↑1140lm/ 2100lm↓	24W(↑7W/ 17W↓)	Radar Sensor
BEZC-3502417-DN-01			DALI dimming
BEZC-4504028-NN-01	↑1250lm/ 2750lm↓	30W(↑9W/ 21W↓)	On/off
BEZC-4504028-WM-01	↑1600lm/ 3700lm↓	40W(↑12W/ 28W↓)	Radar Sensor
BEZC-4504028-DN-01			DALI dimming
BEZC-6006042-NN-01	↑1500lm/ 5220lm↓	48W(↑14W/ 34W↓)	On/off
BEZC-6006042-WM-01	↑2400lm/ 6000lm↓	60W(↑18W/ 42W↓)	Radar Sensor
BEZC-6006042-DN-01			DALI dimming


PRODUCT MODEL
UGR<22

Part No.	LM	Power	Function
BEZC-3502424-NN-01	2250lm↓/ 3000lm↓	18W↓/ 24W↓	On/off
BEZC-3502424-DN-01			DALI dimming
BEZC-4504040-NN-01	3900lm↓/ 5200lm↓	30W↓/ 40W↓	On/off
BEZC-4504040-DN-01			DALI dimming
BEZC-6006060-NN-01	6480lm↓/ 8100lm↓	48W↓/ 60W↓	On/off
BEZC-6006060-DN-01			DALI dimming

SIZE



LIGHT DISTRIBUTION





SPECIFIC OFFICE LIGHTING


ROMI-C 2.0

APPLICATIONS:
Open-plan office, individual office, cafeteria, corridors, break-out area, classroom, etc.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Light efficiency up to 140lm/W
- The upper light section can be switched off independently
- Microprism, UGR<19
- Extremely simple for installation and maintenance
- Come with several size Ø350 / Ø450 / Ø600




PRODUCT PARAMETERS

Luminaire Wattage	18W/ 24W power switchable	30W/ 40W power switchable	48W/ 60W power switchable
Luminous Flux	2160lm/2880lm	3900lm/5200lm	6720lm/8400lm
CCT	3000K/ 4000K (CCT switchable)		
CRI	>80		
UGR	<19		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
BROC-3502417-NN-01	↑800lm/ 1360lm↓	↑6W/ 12W↓	On/off
BROC-3502417-DN-01	↑950lm/ 1930lm↓	↑7W/ 17W↓	DALI dimming
BROC-4504028-NN-01	↑1300lm/ 2600lm↓	↑9W/ 21W↓	On/off
BROC-4504028-DN-01	↑1700lm/ 3500lm↓	↑12W/ 28W↓	DALI dimming
BROC-6006042-NN-01	↑1800lm/ 3940lm↓	↑14W/ 34W↓	On/off
BROC-6006042-DN-01	↑2300lm/ 6100lm↓	↑18W/ 42W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION








KEY-C

APPLICATIONS:
Open-plan office, reception room, training room, cafeteria, etc.

IP20 Dimmable CE RoHS





Light efficiency could be 120LM/W



Flexible microprism plate



Linkable and no light leakage


PRODUCT PARAMETERS


Luminaire Wattage	40W	50W
Luminous Flux	4800lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BKEC-1204040-NN	4800lm	40W	On/off
BKEC-1204040-VN	4800lm	40W	1-10V dimming
BKEC-1204040-DN	4800lm	40W	DALI dimming
BKEC-1505050-NN	6000lm	50W	On/off
BKEC-1505050-VN	6000lm	50W	1-10V dimming
BKEC-1505050-DN	6000lm	50W	DALI dimming

SIZE









ELFOO-C


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <18 UGR | Dimmable | CE | RoHS



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together






PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	80°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFC-1203030-NN	3200lm	30W	On/off
BEFC-1203030-VN	3200lm	30W	1-10V dimming
BEFC-1203030-DN	3200lm	30W	DALI dimming
BEFC-1503535-NN	3600lm	35W	On/off
BEFC-1503535-VN	3600lm	35W	1-10V dimming
BEFC-1503535-DN	3600lm	35W	DALI dimming

SIZE



LIGHT DISTRIBUTION








RECESSED LUMINAIRES



Linear XS 20



REP



EZY-R



KEY-R

	Linear XS 20	REP	EZY-R	KEY-R
Luminaire Wattage	10W/ 20W/ 25W	4W	15W/ 28W/ 30W/ 40W	40W/ 50W
Luminous Flux	1400lm/ 3000lm/ 3750lm	80lm	1950lm/ 3920lm/ 4350lm/ 5890lm	4400lm/ 6000lm
UGR	<19/ <22	/	<20 / <25	<27
optics	60°/ 90°	Asymmetric optics	90°	90°
CRI	>80/ >90	>80	>80	>80
CCT	3000K/ 4000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / DALI	On/off	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours				


Linear XS 20

APPLICATIONS:
Open-plan office, small office, meeting room, reception area, etc.

IP20 | 150 LM/W | <19 UGR | Dimmable | CE | RoHS



- The Linear XS 20 is a luminaire specially designed for the SAPP/WEC linear slotted ceiling system.
- Light efficiency up to 150lm/W
- Lens or prismatic panel optional






PRODUCT PARAMETER

Luminaire Wattage	10W	20W	25W
Luminous Flux	1400lm	3000lm	3750lm
CCT	3000K/ 4000K		
CRI	>80/ >90		
UGR	<19/ <22		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	Function
LNR20610-O-2830X	1400lm	10W	On/off
LNR20610-O-2840X	1400lm	10W	On/off
LNR20610-D-2830X	1400lm	10W	DALI dimming
LNR20610-D-2840X	1400lm	10W	DALI dimming
LNR21220-O-2830X	3000lm	20W	On/off
LNR21220-O-2840X	3000lm	20W	On/off
LNR21220-D-2830X	3000lm	20W	DALI dimming
LNR21220-D-2840X	3000lm	20W	DALI dimming
LNR21525-O-2830X	3750lm	25W	On/off
LNR21525-O-2840X	3750lm	25W	On/off
LNR21525-D-2830X	3750lm	25W	DALI dimming
LNR21525-D-2840X	3750lm	25W	DALI dimming

SIZE



LIGHT DISTRIBUTION





SPECIFIC OFFICE LIGHTING

REP

APPLICATIONS:
Applicable to indoor step lighting,
indoor corridor lighting, etc.

IP20 Dimmable CE RoHS





- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.
- No visible screw design
- Universal European universal recessed bottom shell
- Replaceable mask
- Motion sensor optional


PRODUCT MODEL

Part No.	LM	Power	Function
BREQ1-0300404-NN	80lm	4W	NO
BREQ1-0300404-NM	80lm	4W	Motion sensor
BREQ2-0300404-NN	80lm	4W	NO
BREQ2-0300404-NM	80lm	4W	Motion sensor
BREQ3-0300404-NN	80lm	4W	NO
BREQ3-0300404-NM	80lm	4W	Motion sensor
BREQ4-0300404-NN	80lm	4W	NO
BREQ4-0300404-NN	80lm	4W	Motion sensor


PRODUCT PARAMETER


Luminaire Wattage	4W
Luminous Flux	80lm
CCT	3000K / 4000K / 6000K
CRI	>80
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	NO /Motion sensor
Colours	Silver / White / Black
Warranty	5 years

SIZE



LIGHT DISTRIBUTION



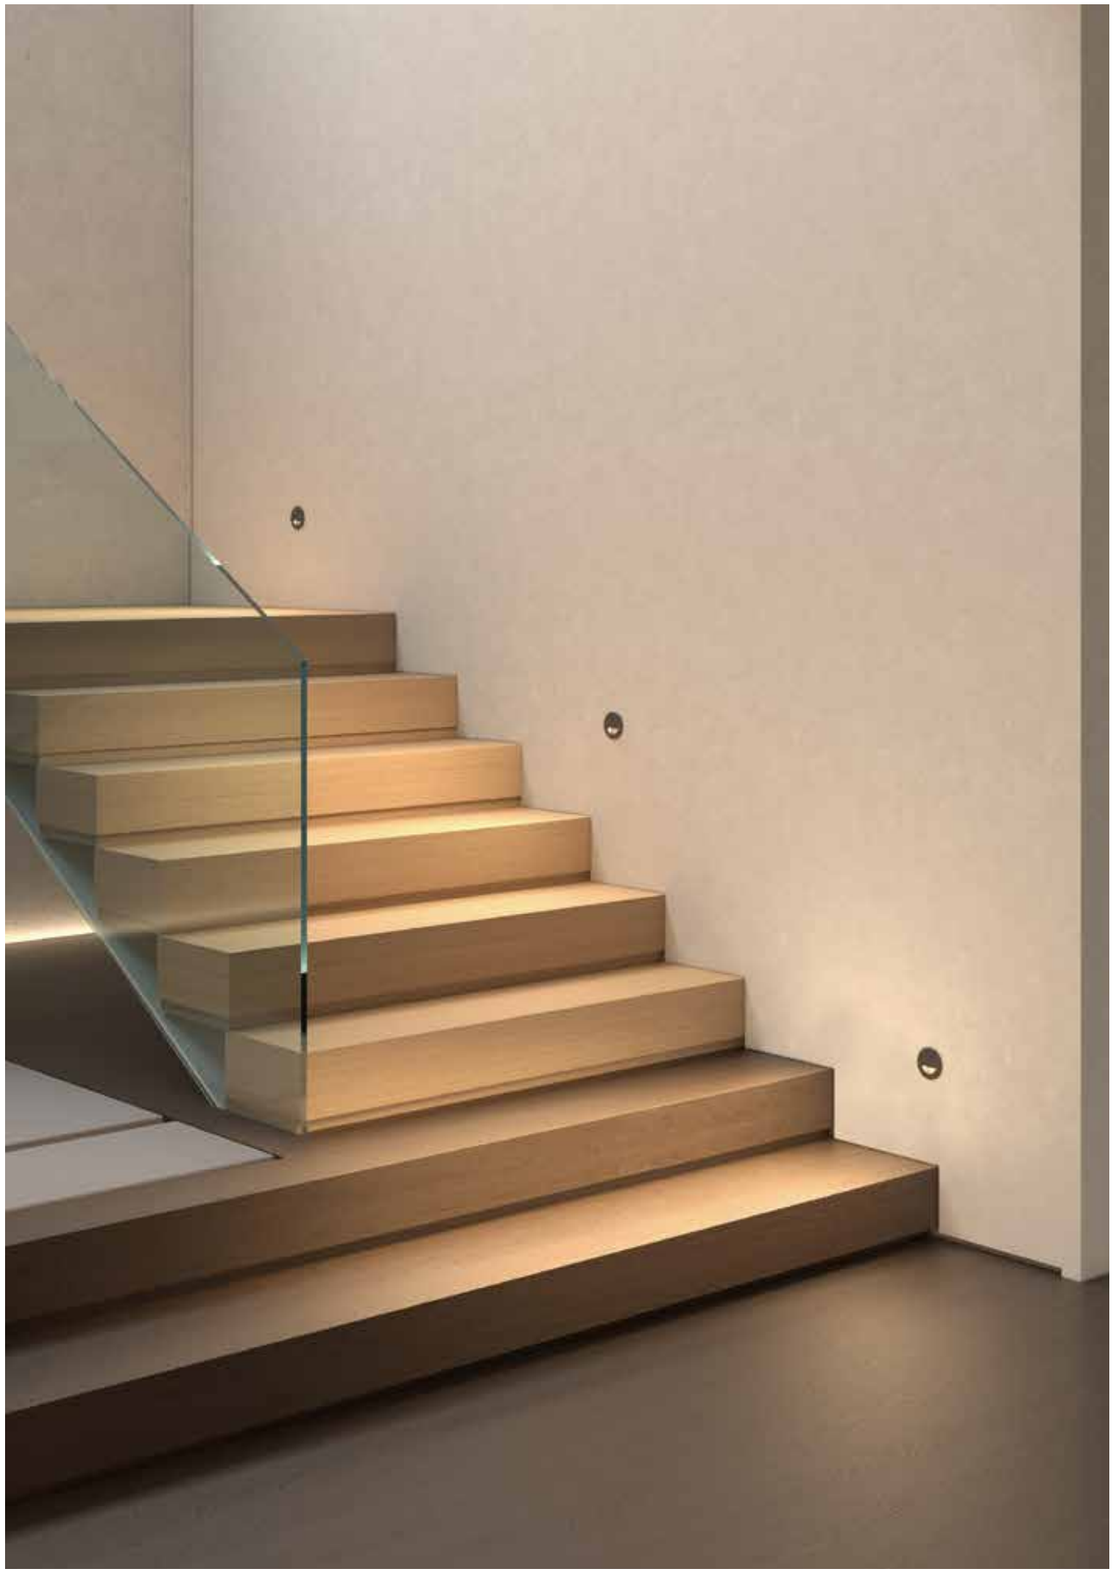

EZY-R

APPLICATIONS:
Open-plan office, small office, meeting rooms, cafeterias, foyers and lobbies, corridors, staircases, etc.

IP40 | 145 LM/W | Dimmable | CE | RoHS





Recessed round luminaire available in 462/612mm diameter sizes



Easy Installation and maintenance with complete fixture setup



Suitable for ceiling thickes range of 3-40mm


PRODUCT PARAMETERS


Luminaire Wattage	15W	28W	30W	40W
Luminous Flux	1950lm	3920lm	4350lm	5890lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<20		<25	
Protection Rating	IP40			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

PRODUCT MODEL

Part No.	LM	Power	Function
BEZR-4501515-NN-01	1950lm	15W	On/off
BEZR-4501515-DN-01	1950lm	15W	DALI dimming
BEZR-6002828-NN-01	3920lm	28W	On/off
BEZR-6002828-DN-01	3920lm	28W	DALI dimming
BEZR-4503030-NN	4350lm	30W	On/off
BEZR-4503030-DN	4350lm	30W	DALI dimming
BEZR-6004040-NN	5890lm	40W	On/off
BEZR-6004040-DN	5890lm	40W	DALI dimming

SIZE







SPECIFIC OFFICE LIGHTING

KEY-R

APPLICATIONS:
Open-plan office, small office, meeting room, reception area, etc.

IP20 Dimmable CE RoHS





Flexible prismatic plate

Support for smart control functions

Linkable design solution


PRODUCT PARAMETERS


Luminaire Wattage	40W	50W
Luminous Flux	4400lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BKEY-1204040-NN	4400lm	40W	On/off
BKEY-1204040-VN	4400lm	40W	1-10V dimming
BKEY-1204040-DN	4400lm	40W	DALI dimming
BKEY-1505050-NN	6000lm	50W	On/off
BKEY-1505050-VN	6000lm	50W	1-10V dimming
BKEY-1505050-DN	6000lm	50W	DALI dimming


SIZE







WALL MOUNTED LUMINAIRES

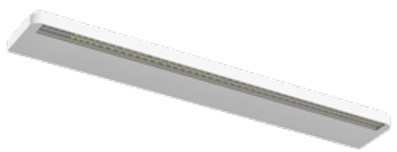

MEDI-W



MAYE-WS 2.0




POD

Luminaire Wattage	140W/ 190W	30W/ 40W Power switchable	25W/ 50W
Luminous Flux	13650lm/ 17850lm	3900lm/ 5000lm	3000lm/ 6000lm
UGR	/	<18	<10
optics	Asymmetric optics	↑130°/ 90°↓	Asymmetric optics
CRI	>90/ Examination light >97	>80	>80
CCT	Room light: 2700~6500K(HCL) Examination light/ Reading light/ Nurse light/ Night light: 3000K	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable
Function	DALI	On/off / DALI	On/off / DALI
Colours			


MEDI-W

APPLICATIONS:
Suitable for use in hospital wards, care homes and similar settings.

IP20 Dimmable CE RoHS

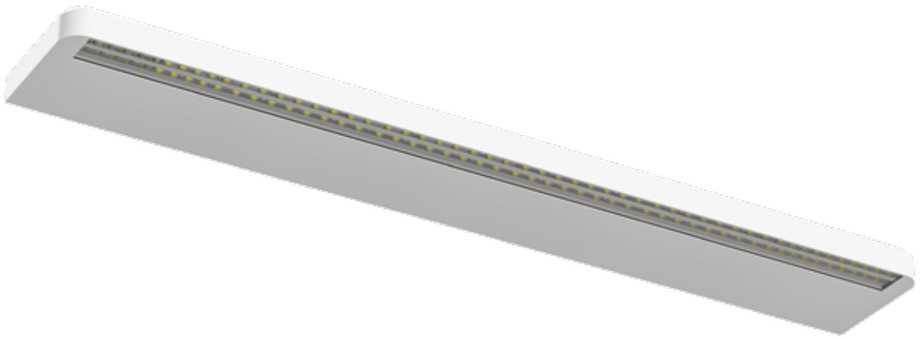

- Five types of optical lenses specially developed for different medical scenarios;
- Each type of light can be controlled independently;
- The downward light emission adopts polarized optics, providing excellent anti-glare effect




PRODUCT PARAMETER

Luminaire Wattage	140W/190W
Luminous Flux	13650lm/17850 lm
CCT	3000K/2700~6500K(HCL)
CRI	>90/ Examination light >97
UGR	/
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	DALI
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMEW-1014035-BN	13650lm	140W	DALI
BMEW-1020070-BN	17850lm	190W	DALI

SIZE



LIGHT DISTRIBUTION






SPECIFIC OFFICE LIGHTING


MAYE-WS 2.0

APPLICATIONS:
Open-plan office, stairs, corridors,
lobby, break out area etc.

IP20 | <18 UGR | Dimmable | CE | RoHS

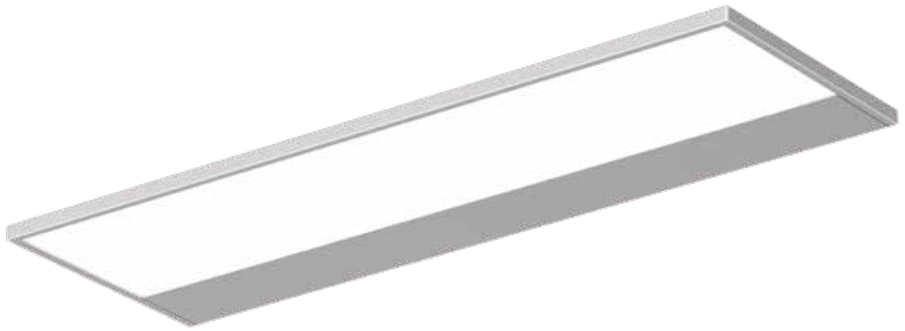

- Slim, minimalist lamp head design
- Single light guide plate achieves 60% indirect lighting & 40% direct lighting for optimal visual comfort
- CCT and Wattage switchable for flexible applications




PRODUCT PARAMETER

Luminaire Wattage	30W/40W (Power switchable)
Luminous Flux	3900lm/5000 lm
CCT	3000K/4000K (CCT switchable)
CRI	>80
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMSW-6104040-NN-01	3900lm/5000 lm	30W/40W	On/off
BMSW-6104040-DN-01	3900lm/5000 lm	30W/40W	DALI dimming

SIZE

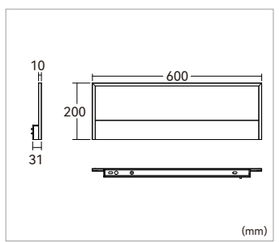

LIGHT DISTRIBUTION






SPECIFIC OFFICE LIGHTING

POD

APPLICATIONS:
Open-plan office, stairs, corridors and other office space.

IP20 | 120 LM/W | Dimmable | CE | RoHS

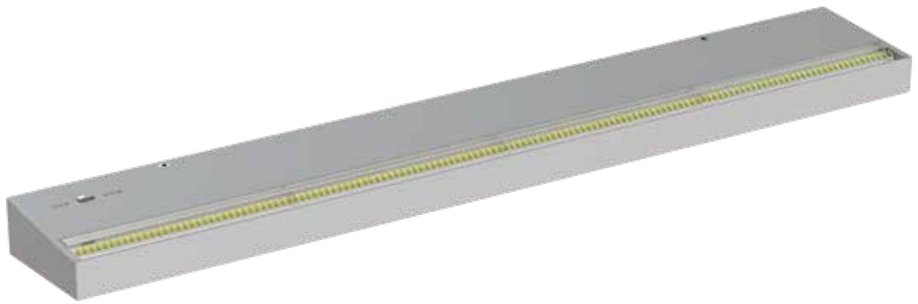



Asymmetric optics



CCT switchable


PRODUCT PARAMETERS

Luminaire Wattage	25W	50W
Luminous Flux	3000lm	6000lm
CCT	3000K / 4000K (CCT switchable)	
CRI	>80	
Optic	Asymmetric optics	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	Function
BPOW-3002500-NN	↑3000	↑25W	On/off
BPOW-3002500-DN	↑3000	↑25W	DALI dimming
BPOW-6005000-NN	↑6000	↑50W	On/off
BPOW-6005000-DN	↑6000	↑50W	DALI dimming

SIZE



LIGHT DISTRIBUTION



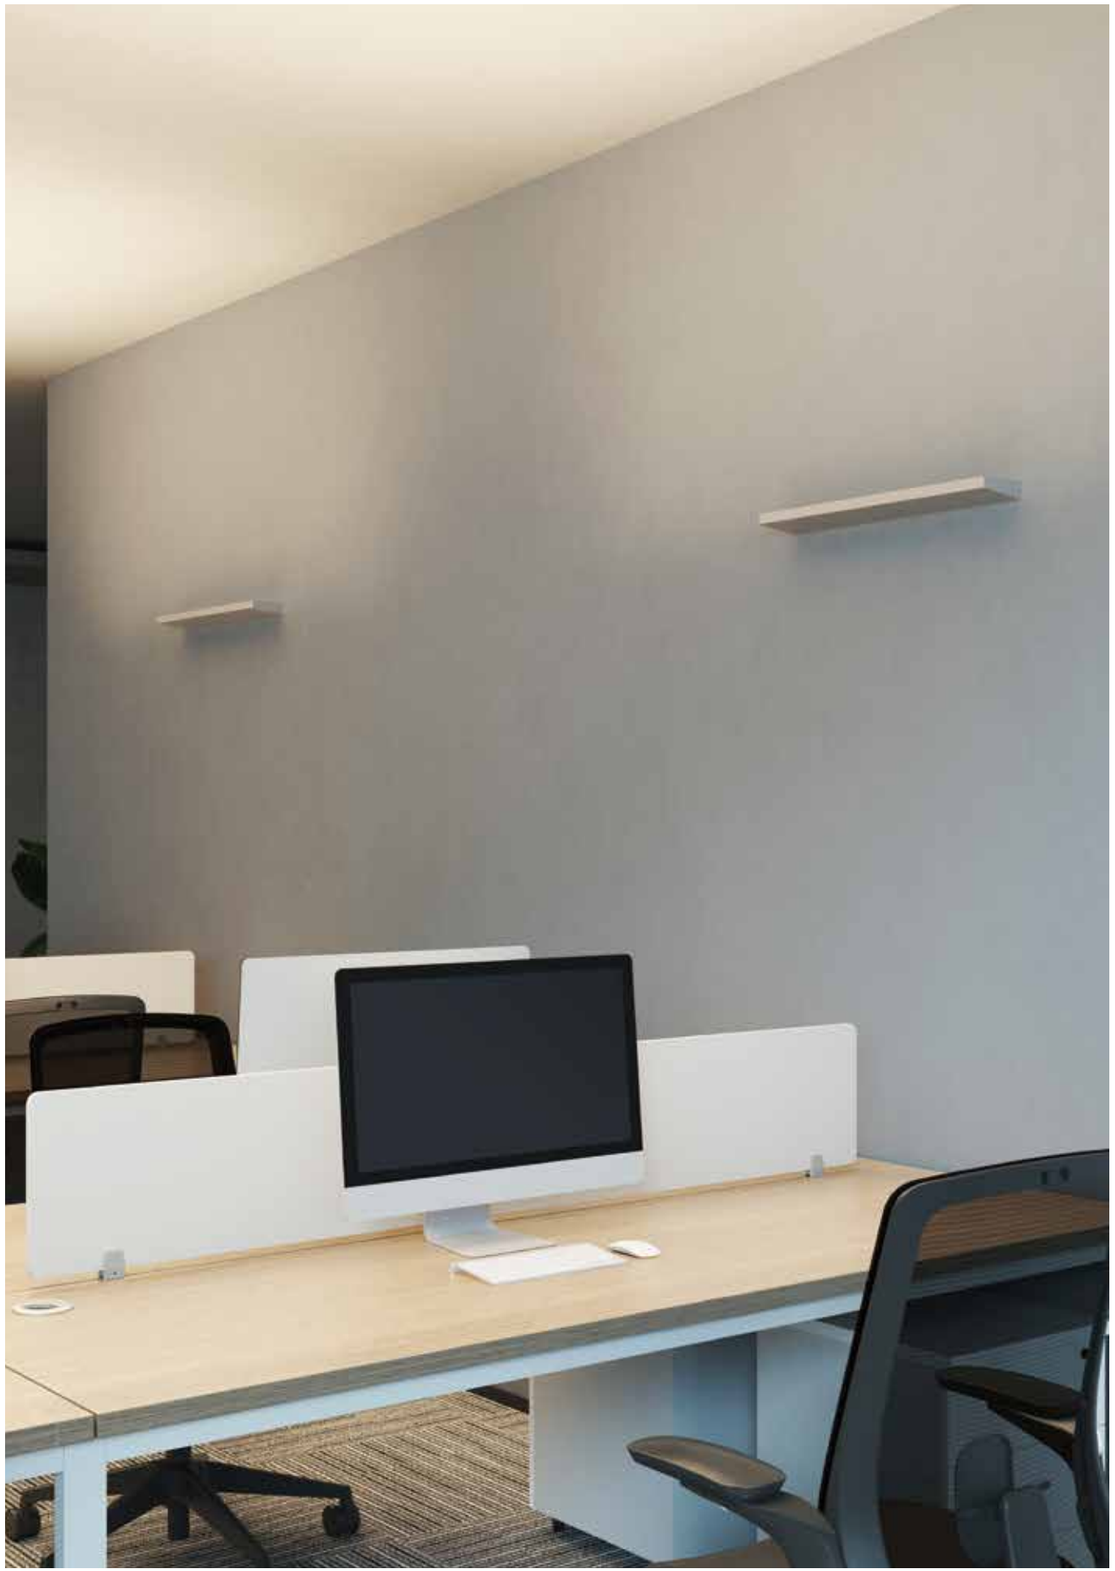



ARCHITECTURE GARDEN LIGHTING

ARCHITECTURE GARDEN LIGHTING

02.

BOLLARDS - 133

FLOODLIGHTS - 153

SURFACE MOUNTING LUMINAIRES - - - - - - - - - - 157

WALL RECESSED LUMINAIRES - - - - - - - - - - - - 175

TABLE LAMPS - 179

BOLLARDS



SHOW-L



PEGO



BUTTON-L



BOLE-M



BOLE-R



BOLE-S



BOLE-U

Luminaire Wattage	5W/ 12W	5W	6.5W/ 12W	6.5W/ 12W	12W/ 24W	12W/ 24W	10W/ 24W
Luminous Flux	450lm/ 1080lm	450lm	550lm/ 1050lm	324lm/ 736lm	1124lm/ 498lm	1162lm/ 505lm	907lm/ 2087lm
DarkSky	B1 U0 G1	B0 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G0
optics	180°	180°	360°	360°	360°/ 180°	360°/ 270°/ 180°	360°
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / DALI	On/off	On/off	On/off	On/off/ DAIL/ Wireless	On/off/ DAIL/ Wireless	On/off
Sensor	Motion sensor	No	Motion sensor	Motion sensor	Radar Sensor Motion sensor	Radar Sensor Motion sensor	No
Colours							

ARCHITECTURE GARDEN LIGHTING

SHOW-L

APPLICATIONS:
Courtyards, gardens, and park pathways. Commercial buildings, corporate headquarters, and public leisure areas, etc.

IP65 IK08



- Illumination span: 8m(length)×4m(width) per unit;
- 60° wide-angle asymmetric optics deliver extensive coverage and excellent uniformity;
- Full cutoff design, DarkSky approval;
- 1,400hrs salt spray test passed








SHOW-L1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH1-10280-NN	1080lm	12W	2700K	On/off	No
B1SH1-10380-NN	1080lm	12W	3000K	On/off	No
B1SH1-10580-NN	1080lm	12W	4000K	On/off	No
B1SH1-10280-DN	1080lm	12W	2700K	DALI	No
B1SH1-10380-DN	1080lm	12W	3000K	DALI	No
B1SH1-10580-DN	1080lm	12W	4000K	DALI	No
B1SH1-10280-NM	1080lm	12W	2700K	On/off	Motion sensor
B1SH1-10380-NM	1080lm	12W	3000K	On/off	Motion sensor
B1SH1-10580-NM	1080lm	12W	4000K	On/off	Motion sensor

SIZE



LIGHT DISTRIBUTION

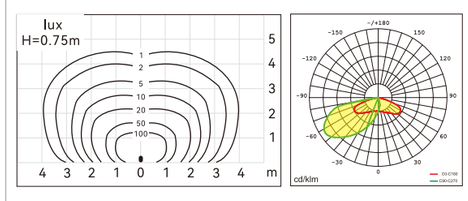




SHOW-L0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH0-05280-NN	450lm	5W	2700K	On/off	No
B1SH0-05380-NN	450lm	5W	3000K	On/off	No
B1SH0-05580-NN	450lm	5W	4000K	On/off	No
B1SH0-05280-DN	450lm	5W	2700K	DALI	No
B1SH0-05380-DN	450lm	5W	3000K	DALI	No
B1SH0-05580-DN	450lm	5W	4000K	DALI	No

SIZE



LIGHT DISTRIBUTION

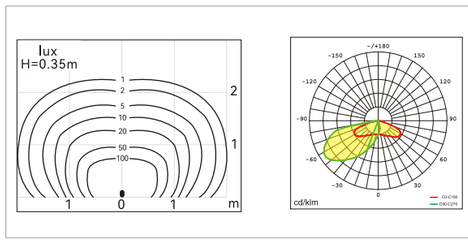


ARCHITECTURE GARDEN LIGHTING

PEGO

APPLICATIONS:
Courtyards, gardens, and park pathways. Commercial buildings, corporate headquarters, and public leisure areas, etc.

IP65 IK08 CE RoHS

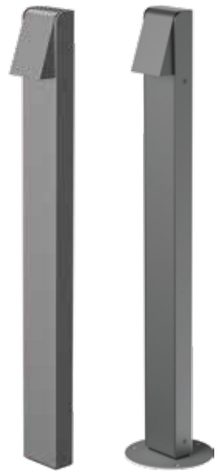

- Asymmetric optics lens design, 7m(length)X3m(width) extensive coverage, excellent uniformity
- Full cutoff design, DarkSky approval
- Sleek and compact design with two height options
- 1,400hrs salt spray test










PEGO


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE1-05280-NN	450lm	5W	2700K	On/off	No
B1PE1-05380-NN	450lm	5W	3000K	On/off	No
B1PE1-05580-NN	450lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

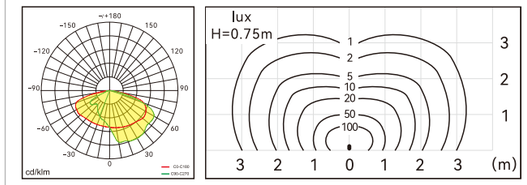

SIZE






PEGO


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE0-05280-NN	450lm	5W	2700K	On/off	No
B1PE0-05380-NN	450lm	5W	3000K	On/off	No
B1PE0-05580-NN	450lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

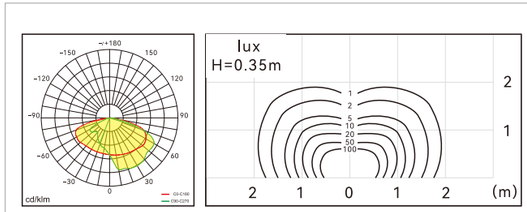

SIZE



BUTTON-L

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

IP65 IK08

- Large angle light distribution
- No glare, long range, uniform light
- Small size










BUTTON-L1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1TL1-12280-NN	1050lm	12W	2700K	On/off	No
B1TL1-12380-NN	1050lm	12W	3000K	On/off	No
B1TL1-12580-NN	1050lm	12W	4000K	On/off	No
B1TL1-12280-DN	1050lm	12W	2700K	DALI	No
B1TL1-12380-DN	1050lm	12W	3000K	DALI	No
B1TL1-12580-DN	1050lm	12W	4000K	DALI	No
B1TL1-12280-NM	1050lm	12W	2700K	On/off	Motion sensor
B1TL1-12380-NM	1050lm	12W	3000K	On/off	Motion sensor
B1TL1-12580-NM	1050lm	12W	4000K	On/off	Motion sensor

SIZE



LIGHT DISTRIBUTION

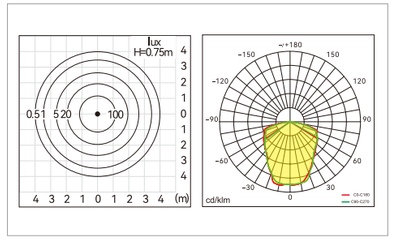




BUTTON-L0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1TL0-06280-NN	550lm	6.5W	2700K	On/off	No
B1TL0-06380-NN	550lm	6.5W	3000K	On/off	No
B1TL0-06580-NN	550lm	6.5W	4000K	On/off	No
B1TL0-06280-DN	550lm	6.5W	2700K	DALI	No
B1TL0-06380-DN	550lm	6.5W	3000K	DALI	No
B1TL0-06580-DN	550lm	6.5W	4000K	DALI	No

SIZE



LIGHT DISTRIBUTION

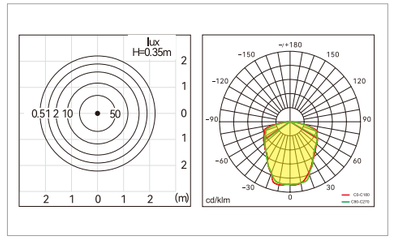

BOLE-M

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

IP65 IK08

- No glare/Light emission 360°
- No glare, long range, uniform light










BOLE-M1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1BM1-12280-NN	736lm	12W	2700K	On/off	No
B1BM1-12380-NN	736lm	12W	3000K	On/off	No
B1BM1-12580-NN	736lm	12W	4000K	On/off	No
B1BM1-12280-DN	736lm	12W	2700K	DALI	No
B1BM1-12380-DN	736lm	12W	3000K	DALI	No
B1BM1-12580-DN	736lm	12W	4000K	DALI	No
B1BM1-12280-NM	736lm	12W	2700K	On/off	Motion sensor
B1BM1-12380-NM	736lm	12W	3000K	On/off	Motion sensor
B1BM1-12580-NM	736lm	12W	4000K	On/off	Motion sensor

SIZE



LIGHT DISTRIBUTION

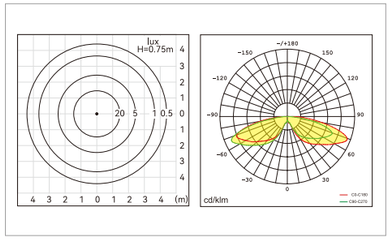




BOLE-M0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1BM0-06280-NN	324lm	6.5W	2700K	On/off	No
B1BM0-06380-NN	324lm	6.5W	3000K	On/off	No
B1BM0-06580-NN	324lm	6.5W	4000K	On/off	No
B1BM0-06280-DN	324lm	6.5W	2700K	DALI	No
B1BM0-06380-DN	324lm	6.5W	3000K	DALI	No
B1BM0-06580-DN	324lm	6.5W	4000K	DALI	No

SIZE



LIGHT DISTRIBUTION

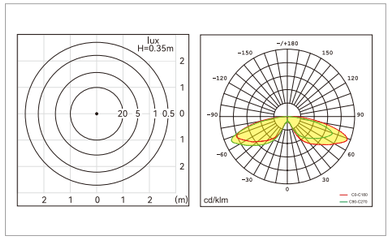

ARCHITECTURE GARDEN LIGHTING

BOLE-R

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

IP65 IK10



No glare/
Light emission 360° or optionally 180°



Long range



Uniform light



Radar Sensor







BOLE-R2

PRODUCT MODEL


Optics with 360 ° emission


Part No.	LM	Power	CCT	Dimming	Sensor
B1BR2-24280-NN	1124lm	24W	2700K	On/off	No
B1BR2-24380-NN			3000K		
B1BR2-24580-NN			4000K		
B1BR2-24280-NM			2700K	On/off	Motion sensor
B1BR2-24380-NM			3000K		
B1BR2-24580-NM			4000K		
B1BR2-24280-DN			2700K	DALI	No
B1BR2-24380-DN			3000K		
B1BR2-24580-DN			4000K		
B1BR2-24280-WM			2700K	Wireless	Radar Sensor
B1BR2-24380-WM			3000K		
B1BR2-24580-WM			4000K		

Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BR5-12280-NN	470lm	12W	2700K	On/off	No
B1BR5-12380-NN			3000K		
B1BR5-12580-NN			4000K		
B1BR5-12280-NM			2700K	On/off	Motion sensor
B1BR5-12380-NM			3000K		
B1BR5-12580-NM			4000K		
B1BR5-12280-DN			2700K	DALI	No
B1BR5-12380-DN			3000K		
B1BR5-12580-DN			4000K		
B1BR5-12280-WM			2700K	Wireless	Radar Sensor
B1BR5-12380-WM			3000K		
B1BR5-12580-WM			4000K		

LIGHT DISTRIBUTION



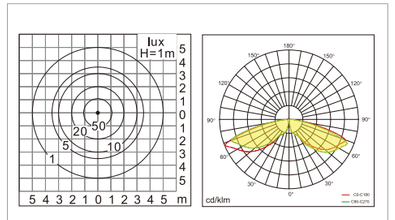



BOLE-R1

PRODUCT MODEL


Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BR1-24280-NN	1124lm	24W	2700K	On/off	No
B1BR1-24380-NN			3000K		
B1BR1-24580-NN			4000K		
B1BR1-24280-NM			2700K	On/off	Motion sensor
B1BR1-24380-NM			3000K		
B1BR1-24580-NM			4000K		
B1BR1-24280-DN			2700K	DALI	No
B1BR1-24380-DN			3000K		
B1BR1-24580-DN			4000K		
B1BR1-24280-WM			2700K	Wireless	Radar Sensor
B1BR1-24380-WM			3000K		
B1BR1-24580-WM			4000K		


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BR4-12280-NN	470lm	12W	2700K	On/off	No
B1BR4-12380-NN			3000K		
B1BR4-12580-NN			4000K		
B1BR4-12280-NM			2700K	On/off	Motion sensor
B1BR4-12380-NM			3000K		
B1BR4-12580-NM			4000K		
B1BR4-12280-DN			2700K	DALI	No
B1BR4-12380-DN			3000K		
B1BR4-12580-DN			4000K		
B1BR4-12280-WM			2700K	Wireless	Radar Sensor
B1BR4-12380-WM			3000K		
B1BR4-12580-WM			4000K		

SIZE



LIGHT DISTRIBUTION

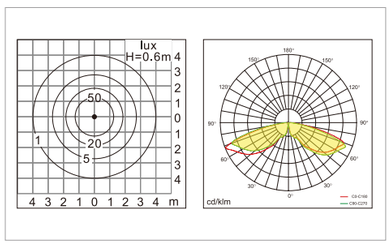



BOLE-R0

PRODUCT MODEL


Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BR0-12280-NN	498lm	12W	2700K	On/off	No
B1BR0-12380-NN			3000K		
B1BR0-12580-NN			4000K		
B1BR0-12280-DN			2700K	DALI	
B1BR0-12380-DN			3000K		
B1BR0-12580-DN			4000K		
B1BR0-24280-NN	1124lm	24W	2700K	On/off	No
B1BR0-24380-NN			3000K		
B1BR0-24580-NN			4000K		
B1BR0-24280-DN			2700K	DALI	
B1BR0-24380-DN			3000K		
B1BR0-24580-DN			4000K		


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BR3-12280-NN	470lm	12W	2700K	On/off	No
B1BR3-12380-NN			3000K		
B1BR3-12580-NN			4000K		
B1BR3-12280-DN			2700K		
B1BR3-12380-DN			3000K		
B1BR3-12580-DN			4000K		

SIZE



LIGHT DISTRIBUTION

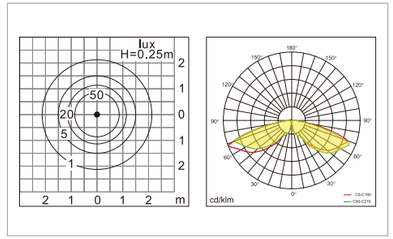


BOLE-S

APPLICATIONS:
Commercial buildings, corporate headquarters, parks,recreational areas, gardens, etc.

IP65 IK10

- No glare/Light emission 360° or optionally 270°or optionally 180°
- No glare, long range, uniform light

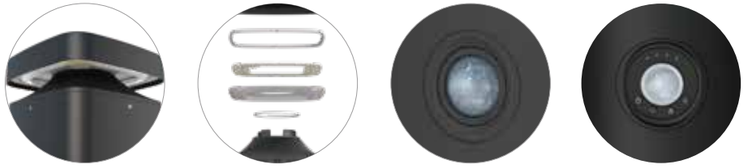










SIZE



LIGHT DISTRIBUTION





BOLE-S2

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BS2-24280-NN	1162lm	24W	2700K	On/off	No
B1BS2-24380-NN			3000K		
B1BS2-24580-NN			4000K		
B1BS2-24280-NM			2700K	On/off	Motion sensor
B1BS2-24380-NM			3000K		
B1BS2-24580-NM			4000K		
B1BS2-24280-DN			2700K	DALI	No
B1BS2-24380-DN			3000K		
B1BS2-24580-DN			4000K		
B1BS2-24280-WM			2700K	Wireless	Radar Sensor
B1BS2-24380-WM			3000K		
B1BS2-24580-WM			4000K		

Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BS5-24280-NN	960lm	24W	2700K	On/off	No
B1BS5-24380-NN			3000K		
B1BS5-24580-NN			4000K		
B1BS5-24280-NM			2700K	On/off	Motion sensor
B1BS5-24380-NM			3000K		
B1BS5-24580-NM			4000K		
B1BS5-24280-DN			2700K	DALI	No
B1BS5-24380-DN			3000K		
B1BS5-24580-DN			4000K		
B1BS5-24280-WM			2700K	Wireless	Radar Sensor
B1BS5-24380-WM			3000K		
B1BS5-24580-WM			4000K		

Optics with 180 ° emission


Part No.	LM	Power	CCT	Dimming	Sensor
B1BS8-12280-NN	450lm	12W	2700K	On/off	No
B1BS8-12380-NN			3000K		
B1BS8-12580-NN			4000K		
B1BS8-12280-NM			2700K	On/off	Motion sensor
B1BS8-12380-NM			3000K		
B1BS8-12580-NM			4000K		
B1BS8-12280-DN			2700K	DALI	No
B1BS8-12380-DN			3000K		
B1BS8-12580-DN			4000K		
B1BS8-12280-WM			2700K	Wireless	Radar Sensor
B1BS8-12380-WM			3000K		
B1BS8-12580-WM			4000K		




BOLE-S1


PRODUCT MODEL

SIZE



LIGHT DISTRIBUTION





Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BS1-24280-NN	1162lm	24W	2700K	On/off	No
B1BS1-24380-NN			3000K		
B1BS1-24580-NN			4000K		
B1BS1-24280-NM			2700K	On/off	Motion sensor
B1BS1-24380-NM			3000K		
B1BS1-24580-NM			4000K		
B1BS1-24280-DN			2700K	DALI	No
B1BS1-24380-DN			3000K		
B1BS1-24580-DN			4000K		
B1BS1-24280-WM			2700K	Wireless	Radar Sensor
B1BS1-24380-WM			3000K		
B1BS1-24580-WM			4000K		

Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BS4-24280-NN	960lm	24W	2700K	On/off	No
B1BS4-24380-NN			3000K		
B1BS4-24580-NN			4000K		
B1BS4-24280-NM			2700K	On/off	Motion sensor
B1BS4-24380-NM			3000K		
B1BS4-24580-NM			4000K		
B1BS4-24280-DN			2700K	DALI	No
B1BS4-24380-DN			3000K		
B1BS4-24580-DN			4000K		
B1BS4-24280-WM			2700K	Wireless	Radar Sensor
B1BS4-24380-WM			3000K		
B1BS4-24580-WM			4000K		

Optics with 180 ° emission


Part No.	LM	Power	CCT	Dimming	Sensor
B1BS7-12280-NN	450lm	12W	2700K	On/off	No
B1BS7-12380-NN			3000K		
B1BS7-12580-NN			4000K		
B1BS7-12280-NM			2700K	On/off	Motion sensor
B1BS7-12380-NM			3000K		
B1BS7-12580-NM			4000K		
B1BS7-12280-DN			2700K	DALI	No
B1BS7-12380-DN			3000K		
B1BS7-12580-DN			4000K		
B1BS7-12280-WM			2700K	Wireless	Radar Sensor
B1BS7-12380-WM			3000K		
B1BS7-12580-WM			4000K		




BOLE-S0


PRODUCT MODEL

SIZE



LIGHT DISTRIBUTION





Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BS0-12280-NN	505lm	12W	2700K	On/off	No
B1BS0-12380-NN			3000K		
B1BS0-12580-NN			4000K		
B1BS0-12280-DN			2700K	DALI	
B1BS0-12380-DN			3000K		
B1BS0-12580-DN			4000K		
B1BS0-24280-NN	1162lm	24W	2700K	On/off	No
B1BS0-24380-NN			3000K		
B1BS0-24580-NN			4000K		
B1BS0-24280-DN			2700K	DALI	
B1BS0-24380-DN			3000K		
B1BS0-24580-DN			4000K		

Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming	Sensor
B1BS6-12280-NN	450lm	12W	2700K	On/off	No
B1BS6-12380-NN			3000K		
B1BS6-12580-NN			4000K		
B1BS6-12280-DN			2700K	DALI	
B1BS6-12380-DN			3000K		
B1BS6-12580-DN			4000K		


BOLE-U

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

IP65 IK08 CE RoHS


- No glare/Light emission 360°
- No glare, long range, uniform light









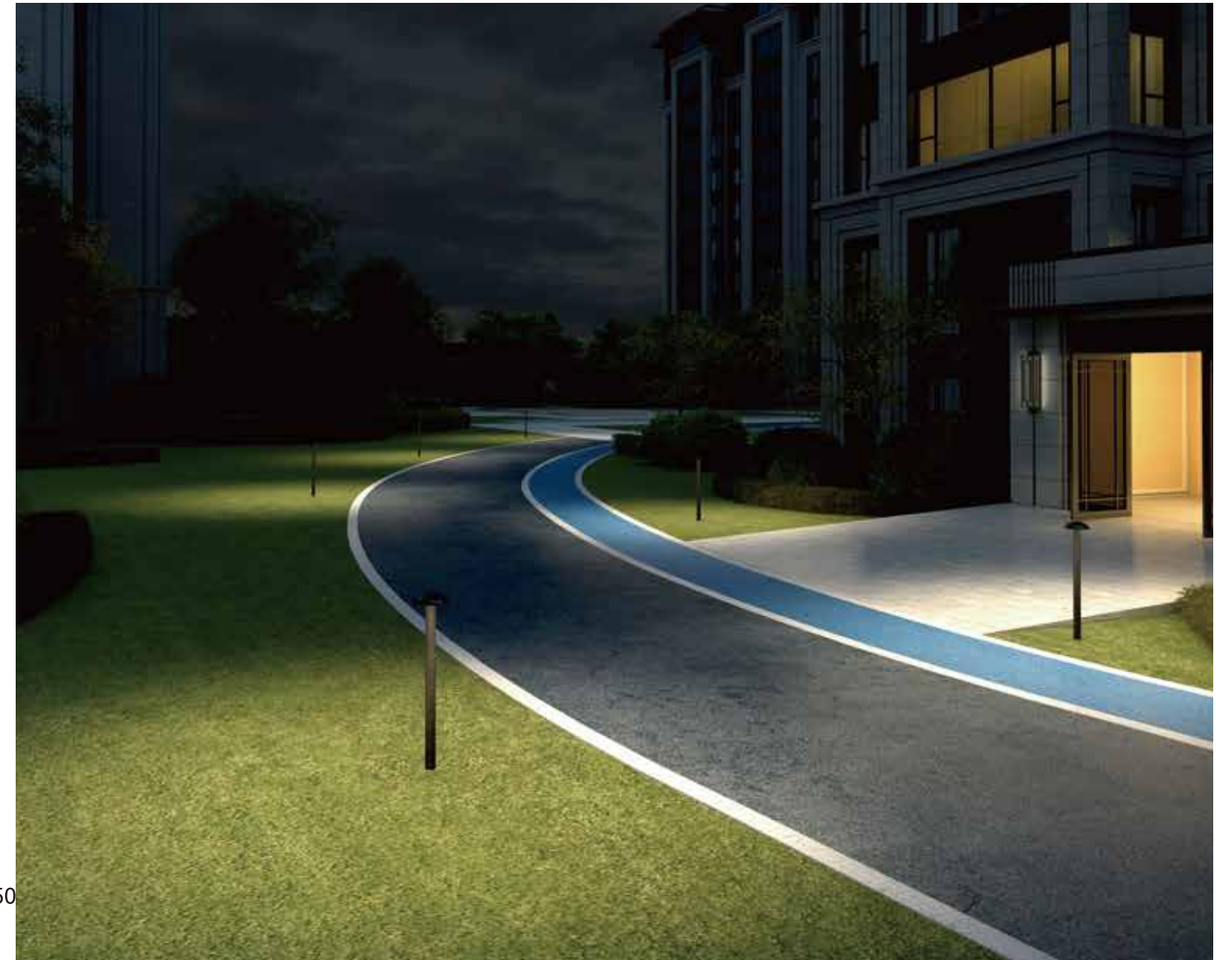




BOLE-U2


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU2-24280-NN	2087lm	24W	2700K	On/off
B1BU2-24380-NN	2087lm	24W	3000K	On/off
B1BU2-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

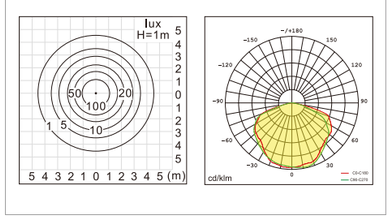




BOLE-U1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU1-24280-NN	2087lm	24W	2700K	On/off
B1BU1-24380-NN	2087lm	24W	3000K	On/off
B1BU1-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

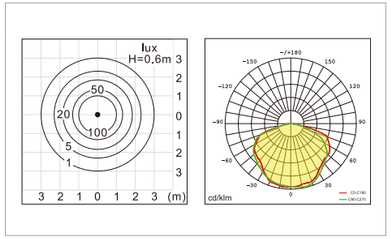




BOLE-U0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU0-10280-NN	907lm	10W	2700K	On/off
B1BU0-10380-NN	907lm	10W	3000K	On/off
B1BU0-10580-NN	907lm	10W	4000K	On/off
B1BU0-24280-NN	2087lm	24W	2700K	On/off
B1BU0-24380-NN	2087lm	24W	3000K	On/off
B1BU0-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

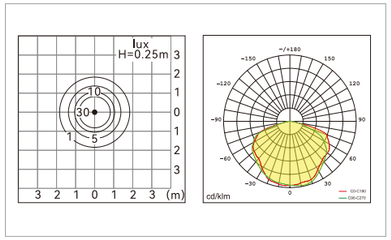

FLOODLIGHTS



CICA-X



CICA-M



CICA-S



CICA-T

Luminaire Wattage	40W	27W	10W	5W
Luminous Flux	2670lm/ 2543lm/ 2370lm	1730lm/ 2050lm/ 1810lm	685lm/ 595lm/ 706lm	310lm/ 315lm
optics	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	24°/ 36°
CRI	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / DALI	On/off / DALI	On/off	On/off
Protection Level	IP65/ IK08	IP65/ IK08	IP65/ IK08	IP65/ IK08
Colours				

CICA

APPLICATIONS:
Trees, buildings and sculptures, etc.

IP65 IK08 DALI 110° CE RoHS

- Bionic design
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming















CICA-X

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CX0-40502-NN	2670lm	40W	2700K/3000K/4000K	15°	On/off
B3CX0-40502-DN	2670lm	40W	2700K/3000K/4000K	15°	DALI 2
B3CX0-40503-NN	2543lm	40W	2700K/3000K/4000K	24°	On/off
B3CX0-40503-DN	2543lm	40W	2700K/3000K/4000K	24°	DALI 2
B3CX0-40504-NN	2370lm	40W	2700K/3000K/4000K	38°	On/off
B3CX0-40504-DN	2370lm	40W	2700K/3000K/4000K	38°	DALI 2






CICA-M

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CM0-27502-NN	1730lm	27W	2700K/3000K/4000K	15°	On/off
B3CM0-27502-DN	1730lm	27W	2700K/3000K/4000K	15°	DALI 2
B3CM0-27503-NN	2050lm	27W	2700K/3000K/4000K	24°	On/off
B3CM0-27503-DN	2050lm	27W	2700K/3000K/4000K	24°	DALI 2
B3CM0-27504-NN	1810lm	27W	2700K/3000K/4000K	38°	On/off
B3CM0-27504-DN	1810lm	27W	2700K/3000K/4000K	38°	DALI 2






CICA-S

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CS0-10502-NN	685lm	10W	2700K/3000K/4000K	15°	On/off
B3CS0-10503-NN	595lm	10W	2700K/3000K/4000K	24°	On/off
B3CS0-10504-NN	706lm	10W	2700K/3000K/4000K	38°	On/off





CICA-T

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CT0-05503-NN	310lm	5W	2700K/3000K/4000K	24°	On/off
B3CT0-05504-NN	315lm	5W	2700K/3000K/4000K	36°	On/off

SURFACE MOUNTING LUMINAIRES



AERIS-R



AERIS-S



HALO



LUNA



PEGO-W



CUBE



TIE



NATURE-W

Luminaire Wattage	8W/ 15W	8W/ 15W	39W/ 25W/ 13W	12W/ 24W	5W	6W/ 12W/ 24W	24W/ 43W	10W
Luminous Flux	800lm/ 1500lm	800lm/ 1500lm	2135lm/ 1987lm/ 1746lm 2600lm/ 2328lm/ 2000lm 1069lm/ 1105lm/ 1173lm	1300lm/ 2630lm	550lm	500lm/ 1050lm/ 2115lm	2350lm/ 3080lm	963lm
optics	115°/125°	115°/125°	20°/ 34°/ 48°	130°	Asymmetric optics	Asymmetric optics	↓24°/24°↑ ↓36°/36°↑	360°
CRI	>80	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	2700K/ 3000K/ 4000K	3000K/ 4000K CCT switchable	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / DALI	On/off / DALI	On/off/ DALI/ Wireless	On/off / DALI	On/off	On/off / DALI	On/off / DALI	On/off
Protection Level	IP65/ IK08	IP65/ IK08	IP65/ IK05	IP65/ IK06	IP65/ IK08	IP65/ IK07	IP65/ IK07	IP65/ IK08
Colours								

ARCHITECTURE GARDEN LIGHTING

AERIS-R

APPLICATIONS:
It can be used in indoor lighting, outdoor corridor lighting, entrance lighting

IP65 IK08



- High-quality PC diffuser delivers uniform and soft light for comfortable visual experience.
- Color temperature selectable via DIP switch.
- Emergency version optional.
- Sensor version optional (sensor integrated inside the luminaire).








AERIS-RF

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4ARF0-08380-NN	800lm	8W	3000K/4000K(CCT switchable)	115°	On/off
B4ARF0-08380-DN	800lm	8W	3000K/4000K(CCT switchable)	115°	DALI 2
B4ARF1-15380-NN	1500lm	15W	3000K/4000K(CCT switchable)	115°	On/off
B4ARF1-15380-DN	1500lm	15W	3000K/4000K(CCT switchable)	115°	DALI 2






AERIS-RH

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4ARH0-08380-NN	840lm	8W	3000K/4000K(CCT switchable)	115°	On/off
B4ARH0-08380-DN	870lm	8W	3000K/4000K(CCT switchable)	115°	DALI 2
B4ARH1-15380-NN	1575lm	15W	3000K/4000K(CCT switchable)	115°	On/off
B4ARH1-15380-DN	1575lm	15W	3000K/4000K(CCT switchable)	115°	DALI 2






AERIS-RO

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4ARO0-08380-NN	880lm	8W	3000K/4000K(CCT switchable)	125°	On/off
B4ARO0-08380-DN	880lm	8W	3000K/4000K(CCT switchable)	125°	DALI 2
B4ARO1-15380-NN	1650lm	15W	3000K/4000K(CCT switchable)	125°	On/off
B4ARO1-15380-DN	1650lm	15W	3000K/4000K(CCT switchable)	125°	DALI 2



AERIS-S

APPLICATIONS:
It can be used in indoor lighting, outdoor corridor lighting, entrance lighting

IP65 IK08




- High-quality PC diffuser delivers uniform and soft light for comfortable visual experience.
- Color temperature selectable via DIP switch.
- Emergency version optional.
- Sensor version optional (sensor integrated inside the luminaire).










AERIS-SF

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4ASF0-08380-NN	800lm	8W	3000K/4000K(CCT switchable)	115°	On/off
B4ASF0-08380-DN	800lm	8W	3000K/4000K(CCT switchable)	115°	DALI 2
B4ASF1-15380-NN	1500lm	15W	3000K/4000K(CCT switchable)	115°	On/off
B4ASF1-15380-DN	1500lm	15W	3000K/4000K(CCT switchable)	115°	DALI 2






AERIS-SH

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4ASH0-08380-NN	840lm	8W	3000K/4000K(CCT switchable)	115°	On/off
B4ASH0-08380-DN	870lm	8W	3000K/4000K(CCT switchable)	115°	DALI 2
B4ASH1-15380-NN	1575lm	15W	3000K/4000K(CCT switchable)	115°	On/off
B4ASH1-15380-DN	1575lm	15W	3000K/4000K(CCT switchable)	115°	DALI 2





AERIS-SO

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4ASO0-08380-NN	880lm	8W	3000K/4000K(CCT switchable)	125°	On/off
B4ASO0-08380-DN	880lm	8W	3000K/4000K(CCT switchable)	125°	DALI 2
B4ASO1-15380-NN	1650lm	15W	3000K/4000K(CCT switchable)	125°	On/off
B4ASO1-15380-DN	1650lm	15W	3000K/4000K(CCT switchable)	125°	DALI 2

HALO

APPLICATIONS:
It can be used in indoor lighting, outdoor corridor lighting, entrance lighting

IP65 IK05

- The optical part is designed as a one-piece annular reflector
- Simple, easy and quick installation












HALO-1


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA1-25520-NN	2135lm	25W	2700K/3000K/4000K	20°	On/off
B5HA1-25520-DN	2135lm	25W	2700K/3000K/4000K	20°	DALI 2
B5HA1-25520-WM	2135lm	25W	2700K/3000K/4000K	20°	Wireless
B5HA1-25540-NN	1987lm	25W	2700K/3000K/4000K	34°	On/off
B5HA1-25540-DN	1987lm	25W	2700K/3000K/4000K	34°	DALI 2
B5HA1-25540-WM	1987lm	25W	2700K/3000K/4000K	34°	Wireless
B5HA1-25550-NN	1746lm	25W	2700K/3000K/4000K	48°	On/off
B5HA1-25550-DN	1746lm	25W	2700K/3000K/4000K	48°	DALI 2
B5HA1-25550-WM	1746lm	25W	2700K/3000K/4000K	48°	Wireless
B5HA1-39520-NN	2600lm	39W	2700K/3000K/4000K	20°	On/off
B5HA1-39520-DN	2600lm	39W	2700K/3000K/4000K	20°	DALI 2
B5HA1-39520-WN	2600lm	39W	2700K/3000K/4000K	20°	Wireless
B5HA1-39540-NN	2328lm	39W	2700K/3000K/4000K	34°	On/off
B5HA1-39540-DN	2328lm	39W	2700K/3000K/4000K	34°	DALI 2
B5HA1-39540-WN	2328lm	39W	2700K/3000K/4000K	34°	Wireless
B5HA1-39550-NN	2000lm	39W	2700K/3000K/4000K	48°	On/off
B5HA1-39550-DN	2000lm	39W	2700K/3000K/4000K	48°	DALI 2
B5HA1-39550-WN	2000lm	39W	2700K/3000K/4000K	48°	Wireless

SIZE



LIGHT DISTRIBUTION

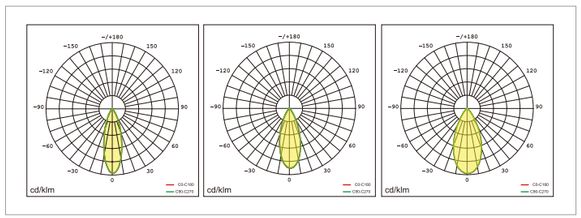






HALO-0


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA0-13520-NN	1069lm	13W	2700K/3000K/4000K	20°	On/off
B5HA0-13540-NN	1105lm	13W	2700K/3000K/4000K	34°	On/off
B5HA0-13550-NN	1173lm	13W	2700K/3000K/4000K	48°	On/off

LIGHT DISTRIBUTION

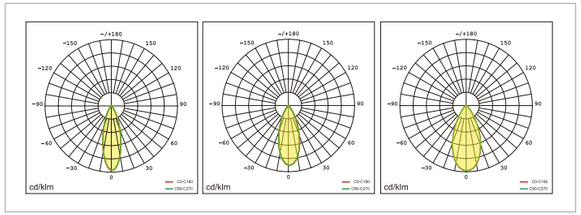

SIZE



LUNA

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.

IP65 IK06



- High-quality glass diffuser design, uniform illumination with no edge shadows
- DIP switch adjustable CCT for flexible adaptation to various applications
- 1,400hrs salt spray test










LUNA


PRODUCT MODEL

Part No.	LM	Power	CCT switchable	Dimming
B4LA0-12380-NN	1300lm	12W	4000K/3000K	On/off
B4LA0-12580-NN	1300lm	12W	4000K/3000K	On/off
B4LA0-12380-DN	1300lm	12W	4000K/3000K	DALI
B4LA0-12580-DN	1300lm	12W	4000K/3000K	DALI
B4LA0-24380-NN	2630lm	24W	4000K/3000K	On/off
B4LA0-24580-NN	2630lm	24W	4000K/3000K	On/off
B4LA0-24380-DN	2630lm	24W	4000K/3000K	DALI
B4LA0-24580-DN	2630lm	24W	4000K/3000K	DALI

LIGHT DISTRIBUTION



SIZE



PEGO-W

APPLICATIONS:
Suitable for indoor and outdoor facade lighting, architectural decorative lighting, etc.


IP65 IK08

- Professional Optical Design for Outdoor Gardens
- 45° wide asymmetric beam angle
- Uniform illumination across 8x3M coverage
- 1,400hrs salt spray test







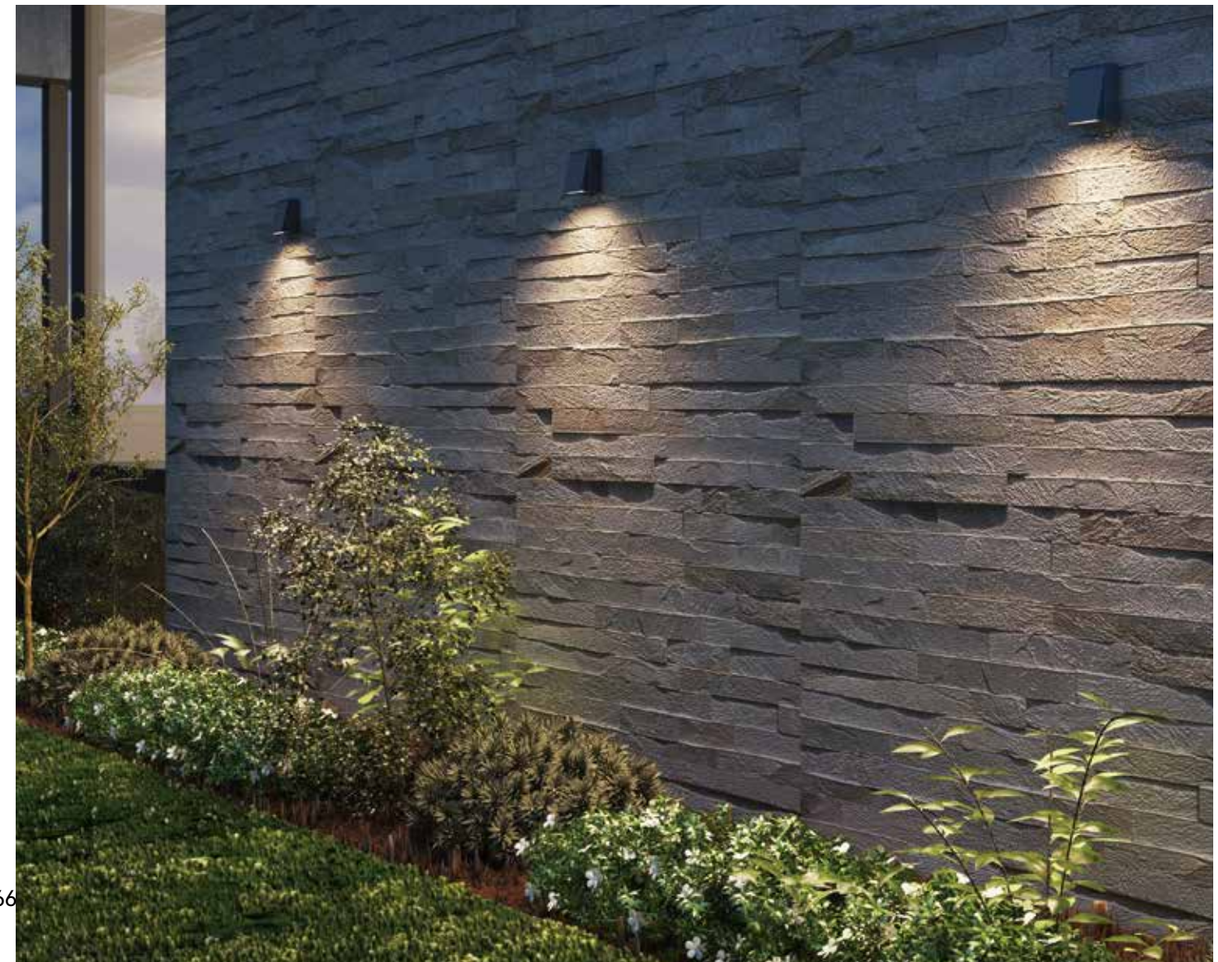




PEGO-W


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE0-05280-NN	550lm	5W	2700K	On/off	No
B1PE0-05380-NN	550lm	5W	3000K	On/off	No
B1PE0-05580-NN	550lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

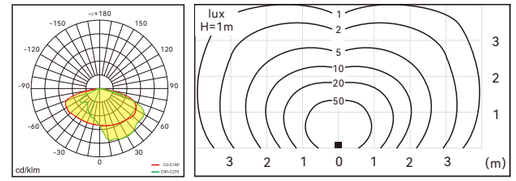

SIZE



CUBE

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.

IP65 | IK07 | DALI | CE | RoHS

- Modular polarized lens design, various light distribution modes can be combined
- Single indirect/ direct light or both indirect and direct light optional
- Anti-glare design with large shielding angle
- IP65 protection, salt spray test more than 1400 hours










CUBE


PRODUCT MODEL

Part No.	LM	Power	CCT	Optic	Dimming
B4CU0-24366-NN	↑1120lm/995lm↓	↑12W/12W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-24366-DN	↑1120lm/995lm↓	↑12W/12W↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12360-NN	995lm↓	12W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12360-DN	995lm↓	12W↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12366-NN	↑550lm/500lm↓	↑6W/6W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12366-DN	↑550lm/500lm↓	↑6W/6W↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-06360-NN	500lm↓	6W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-06360-DN	500lm↓	6W↓	2700K/3000K/4000K	Asymmetric	DALI 2

LIGHT DISTRIBUTION



SIZE



TIE

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.

IP65 IK07


- Optional DALI2, wireless intelligent dimming
- Direct and indirect light













TIE-R


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TR0-24533-NN	2350lm	24W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TR0-24533-DN	2350lm	24W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TR0-24544-NN	2350lm	24W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TR0-24544-DN	2350lm	24W	2700K/3000K/4000K	↓36°/36°↑	DALI 2
B4TR0-43533-NN	3080lm	43W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TR0-43533-DN	3080lm	43W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TR0-43544-NN	3080lm	43W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TR0-43544-DN	3080lm	43W	2700K/3000K/4000K	↓36°/36°↑	DALI 2

LIGHT DISTRIBUTION

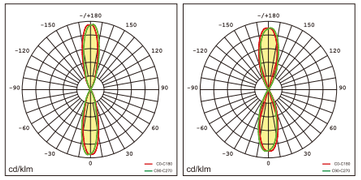






TIE-S

PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TS0-24533-NN	2382lm	24W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TS0-24533-DN	2382lm	24W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TS0-24544-NN	2382lm	24W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TS0-24544-DN	2382lm	24W	2700K/3000K/4000K	↓36°/36°↑	DALI 2
B4TS0-43533-NN	3120lm	43W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TS0-43533-DN	3120lm	43W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TS0-43544-NN	3120lm	43W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TS0-43544-DN	3120lm	43W	2700K/3000K/4000K	↓36°/36°↑	DALI 2

LIGHT DISTRIBUTION

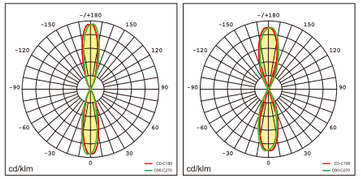


NATURE-W

APPLICATIONS:
It can be used for indoor and outdoor facade lighting,architectural decorative lighting, etc.

IP65 IK08



No Glare



Light Emission 360°








NATURE-W


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B4NW0-10280-NN	963lm	10W	2700K	On/off
B4NW0-10380-NN	963lm	10W	3000K	On/off
B4NW0-10580-NN	963lm	10W	4000K	On/off

SIZE



LIGHT DISTRIBUTION



WALL RECESSED LUMINAIRES



SAFE-S



SAFE-O

Luminaire Wattage	4W	7W/ 8W
Luminous Flux	296lm	360lm
optics	Asymmetric optics	Asymmetric optics
CRI	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Sensor	No	No
Protection Level	IP65/ IK08	IP65/ IK05
Colours		


ARCHITECTURE GARDEN LIGHTING

SAFE

APPLICATIONS:
It can be applicable for indoor and outdoor lighting purpose,wall path lighting, etc.

IP65 IK08 DALI CE RoHS


- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.

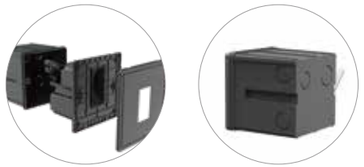










SAFE-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SS0-04250-NN	296lm	4W	2700K	On/off
B2SS0-04350-NN	296lm	4W	3000K	On/off
B2SS0-04550-NN	296lm	4W	4000K	On/off
B2SS0-04250-VN	296lm	4W	2700K	1-10V
B2SS0-04350-VN	296lm	4W	3000K	1-10V
B2SS0-04550-VN	296lm	4W	4000K	1-10V
B2SS0-04250-DN	296lm	4W	2700K	DALI 2
B2SS0-04350-DN	296lm	4W	3000K	DALI 2
B2SS0-04550-DN	296lm	4W	4000K	DALI 2

LIGHT DISTRIBUTION

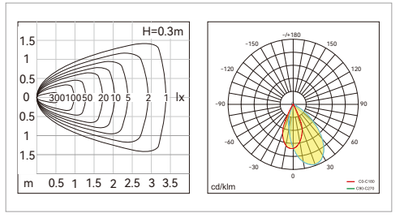





SAFE-O

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SO0-07250-NN	360lm	7W	2700K	On/off
B2SO0-07350-NN	360lm	7W	3000K	On/off
B2SO0-07550-NN	360lm	7W	4000K	On/off
B2SO0-08250-VN	360lm	8W	2700K	1-10V
B2SO0-08350-VN	360lm	8W	3000K	1-10V
B2SO0-08550-VN	360lm	8W	4000K	1-10V
B2SO0-08250-DN	360lm	8W	2700K	DALI 2
B2SO0-08350-DN	360lm	8W	3000K	DALI 2
B2SO0-08550-DN	360lm	8W	4000K	DALI 2

LIGHT DISTRIBUTION

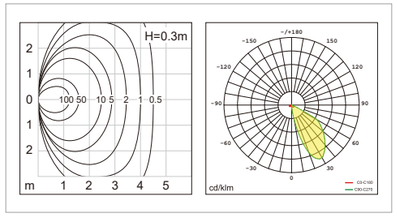


TABLE LAMPS



PUDDING



NATURE-T

Luminaire Wattage	3W	4W
Luminous Flux	300lm	344lm
optics	130°	145°
CRI	>80	>90
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Dimming	Touch dimming	Touch dimming
Batte Run time	6-8 hours	8 hours
Protection Level	IP54/ IK06	IP65/ IK08
Colours		

ARCHITECTURE GARDEN LIGHTING

PUDDING


APPLICATIONS:
Meet various indoor and outdoor lighting needs

IP54 IK06



- Specially designed for courtyard gatherings;
- Magnetic mounting with multiple installation for indoor/outdoor applications;
- Optical lens with subtle sidelight emission, deliver comfortable light;
- 4.75 hours quick-charging battery delivering 6-8 hours of continuous operation;








PUDDING

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9PU0-04280-TN	300lm	3W	2700K	Touch dimming
B9PU0-04380-TN	300lm	3W	3000K	Touch dimming
B9PU0-04580-TN	300lm	3W	4000K	Touch dimming

SIZE



NATURE-T

APPLICATIONS:
Meet various indoor and outdoor lighting needs

IP65 IK08

- At full power can be used for 8 hours (±1 hours)
- 145°Wide beam angle, Provide wide light distribution
- charge with a Type C cable
- Lamp head is detachable










NATURE-T


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9NT0-04280-TN	344lm	4W	2700K	Touch dimming
B9NT0-04380-TN	344lm	4W	3000K	Touch dimming
B9NT0-04580-TN	344lm	4W	4000K	Touch dimming

SIZE



LIGHT DISTRIBUTION



NEXOL

NEW EXPERIENCE OF LIGHTING