


ELFOO-C3

Surface mounted luminaires

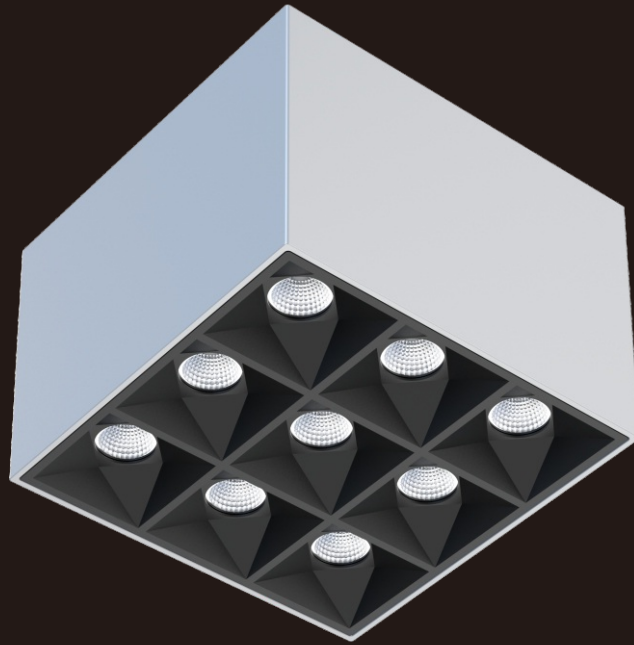

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Collocated with micro reflector and anti-glare cover, it can realize 35° /65° beam angle and perfect light cutoff. UGR value is as low as 15. Adopting structure of trimless design, independent led modules and push-in & push-out structure, lamp is easy for installation and maintenance. Main material includes aluminum profile and PC. Typical value of light efficiency is 110lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming. Collocated with CASAMBI wireless system, dimming and tunable white can be realized.

Features

Push-in-Push-out Structure, easy for installation and maintenance

Perfect glare control, Low UGR




Support DALI and 1-10V dimming

5 years warranty

Application Areas



For office corridor, washroom, staircase, etc.

Technical data

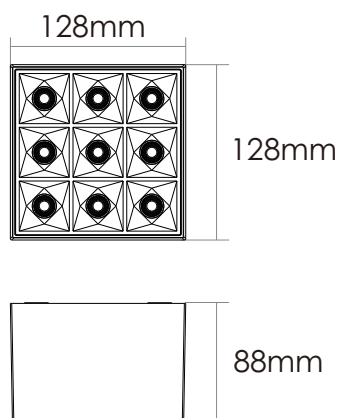

| Item No. | BEFK-1200808-NN | | BEFK-1200808-VN | BEFK-1200808-DN |
|-------------------------|---------------------|--|-----------------|-----------------|
| Input Power | 8W | | | |
| Input Voltage | AC200~240V | | | |
| Power Factor | ≥0.9 | | | |
| Luminous Flux | 850lm | | | |
| UGR | <14(35°) / <17(65°) | | | |
| Color Rendering Index | >80 | | | |
| Life Time | L80(B10)50,000H | | | |
| Beam Angle | 35°/65° | | | |
| CCT | 3000/4000/6000K | | | |
| Colour consistency SDCM | < 3 | | | |
| Dimming | NO | | 1-10V dimming | DALI dimming |
| Sensor | NO | | | |
| Housing Color | Silver/White | | | |
| Fixture Materia | 6063AL | | | |
| Protection Level | IP20 | | | |
| Storage Temperature | -40°C~+80°C | | | |
| Working Temperature | -20°C~+45°C | | | |
| Net Weight | 0.8kg | | | |
| Package size | 960*395*245mm | | | |
| 20GP | 5160pcs | | | |
| 40GP | 11400pcs | | | |

Technical data



| Item No. | BEFK-1201818-NN | | BEFK-1201818-VN | BEFK-1201818-DN |
|-------------------------|-----------------|--|---------------------|-----------------|
| Input Power | | | 18W | |
| Input Voltage | | | AC200~240V | |
| Power Factor | | | ≥0.9 | |
| Luminous Flux | | | 1900lm | |
| UGR | | | <17(35°) / <19(65°) | |
| Color Rendering Index | | | >80 | |
| Life Time | | | L80(B10)50,000H | |
| Beam Angle | | | 35°/65° | |
| CCT | | | 3000/4000/6000K | |
| Colour consistency SDCM | | | < 3 | |
| Dimming | NO | | 1-10V dimming | DALI dimming |
| Sensor | | | NO | |
| Housing Color | | | Silver/White | |
| Fixture Materia | | | 6063AL | |
| Protection Level | | | IP20 | |
| Storage Temperature | | | -40°C~+80°C | |
| Working Temperature | | | -20°C~+45°C | |
| Net Weight | | | 0.8kg | |
| Package size | | | 960*395*245mm | |
| 20GP | | | 5160pcs | |
| 40GP | | | 11400pcs | |

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in speci cation are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.