

ELFOO-D5

Recessed luminaires



With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Collocated with micro reflector and anti-glare cover, it can realize 55° beam angle and perfect light cutoff. UGR value is as low as 18. lamp is easy for installation and maintenance. Main material includes aluminum profile and PC. Typical value of light efficiency is 130lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming.

Features

Perfect glare control, Low UGR



Support DALI and 1-10V dimming

5 years warranty

Application Areas

For office corridor, washroom, staircase, etc.

Technical data

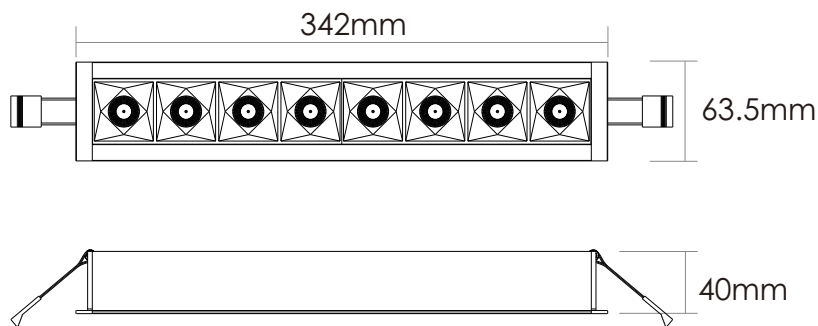

Item No.	BEFQ-3401212-NN	BEFQ-3401212-VN	BEFQ-3401212-DN
Input Power	12W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	1552lm		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	55°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	0.55kg		
Package size	795*550*225mm		
20GP	4860pcs		
40GP	10760pcs		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.