


ELFOO-R1 recessed luminaires

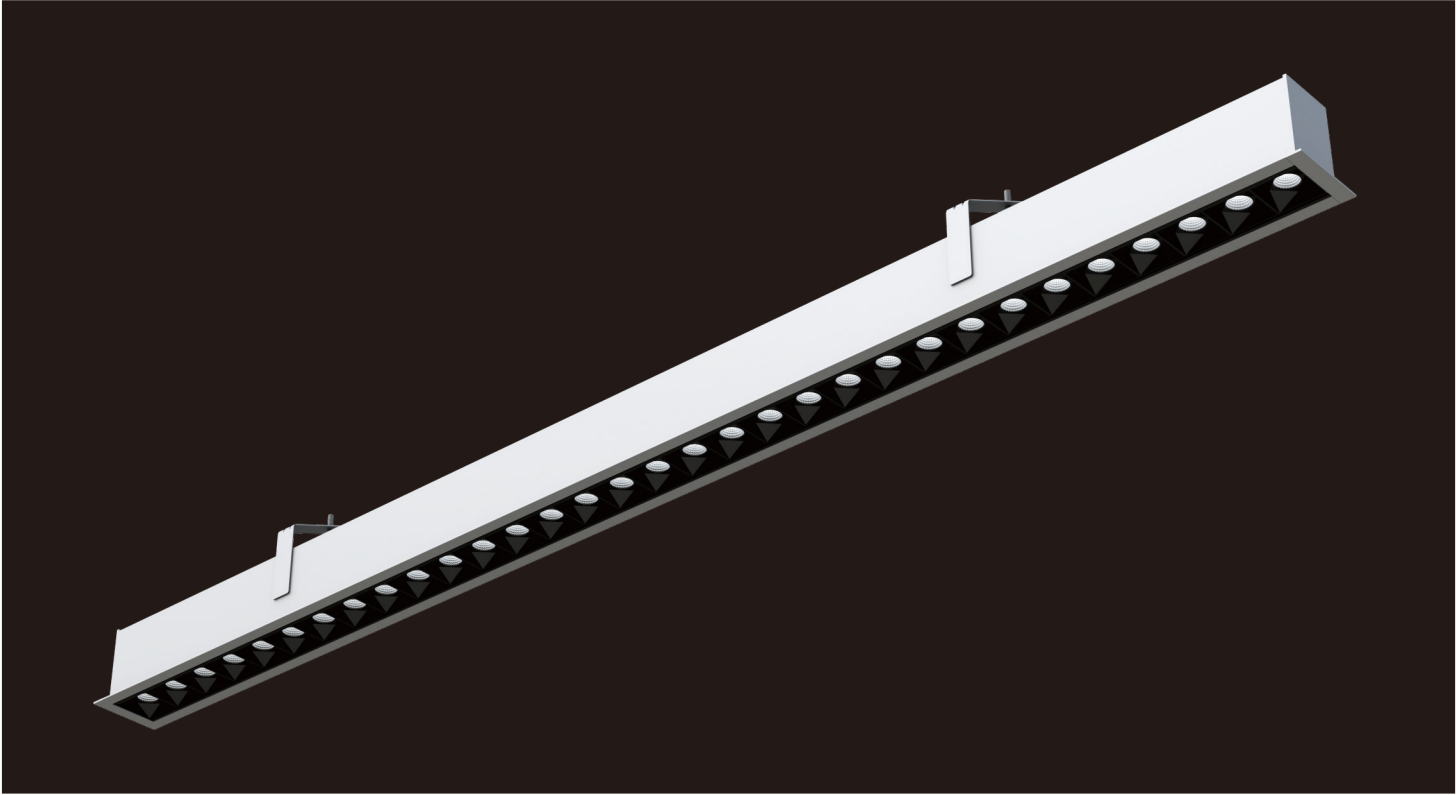

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Collocated with micro reflector and anti-glare cover, it can realize 75° beam angle and perfect light cutoff. UGR value is as low as 18. Adopting structure of trimmed design, independent linear led modules and push-in & push-out structure, lamp is easy for installation and maintenance. Main material includes aluminum profile and PC. Typical value of light efficiency is 110lm/w, and lighting is of flicker free. Lamp supports 1-10V and DALI dimming. Adopting trimless and recessed installation.

Features




Wide beam angle with professional Glare control design, UGR<18
Linkable for linear applications
No gap and no light come out from connection parts when linked together
Support for smart control functions <ul style="list-style-type: none">• DALI and 1-10V dimming• Tunable white• CASAMBI
5 years warranty

Application Areas

For open-planed office, training room conference room and classroom, etc.



Technical data

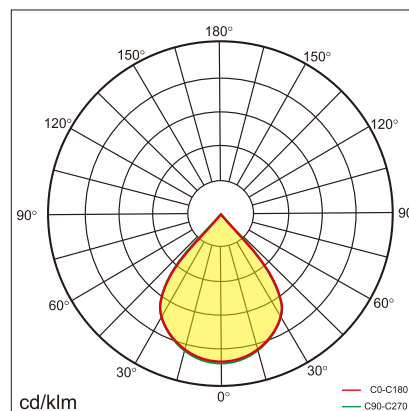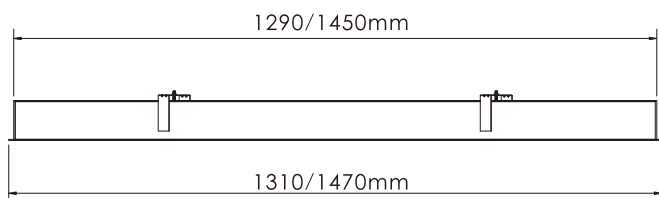

Item No.	BEFY-1203030-NN	BEFY-1203030-VN	BEFY-1203030-DN
Input Power	30W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	3200lm		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	75°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Material	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.9kg		
Package size	1450*255*195mm		
20GP	1235pcs		
40GP	2870pcs		

Technical data

Item No.	BEFY-1503535-NN	BEFY-1503535-VN	BEFY-1503535-DN
Input Power	35W		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	3600lm		
UGR	<18		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	75°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight			
Package size			
20GP			
40GP			

Shenzhen Nexol Lighting Technology Co., Ltd

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

