

HOME C free standing luminaire



Inheriting classic design, round corner structure, perfect assembly details makes exquisite appearance with rich texture. The product emits downwards and adopts a diffuser plate of a microprism structure to realize an anti-glare function, the beam angle is about 90 degrees, the upward beam angle is 110 degrees. DIY assembly, no need professionals, portable on the side of the desktop, easy installation, flexible using. Typical value is 110LM/W, flicker free, KNOB dimming, 50% DIRECT / 50% INDIRECT synchronous dimming control, and other intelligent control like motion sensor and day light sensor, etc. The main materials are aluminum profiles, steel and PMMA. With cuttable pole. The item is especially designed for WHOLESALER sales channels.

Features

Simple and exquisite industrial design with rich texture

UGR<17, lighting uniform and healthy

Integrated packaging, easy for transportation and online sales

Support smart control functions

- Knob dimming
 - Motion sensor
 - Daylight sensor
-



5 years warranty

Application Areas

For personal offices, public offices and other office space.



Technical data

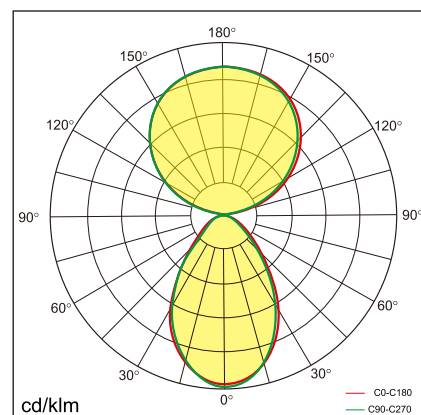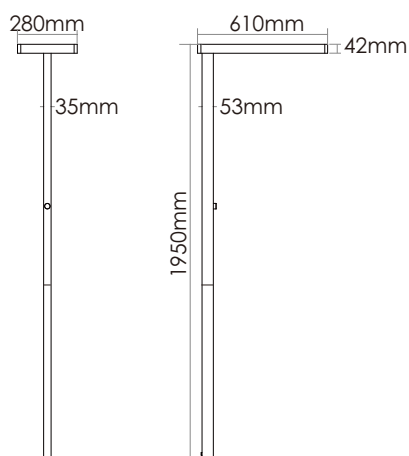

Item No.	BHOJ-1906030-BN	BHOJ-1906030-BM	BHOJ-1906030-BD
Input Power	↑30W/30W↓	↑30W/30W↓	↑30W/30W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9
Luminous Flux	↑3500lm/3100lm↓	↑3500lm/3100lm↓	↑3500lm/3100lm↓
UGR	<17	<17	<17
Color Rendering Index	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓
CCT	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K
Colour consistency SDCM	< 3	< 3	< 3
Dimming	Knobdimming	Knobdimming	Knobdimming
Sensor	NO	Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL	6063AL
Protection Level	IP 20	IP 20	IP 20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	12.5kg	12.5kg	12.5kg
Package size	1210*500*120mm	1210*500*120mm	1210*500*120mm
20GP	350pcs	350pcs	350pcs
40GP	730pcs	730pcs	730pcs

Technical data

Item No.	BHOJ-1908040-BN	BHOJ-1908040-BM	BHOJ-1908040-BD
Input Power	↑40W/40W↓	↑40W/40W↓	↑40W/40W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9
Luminous Flux	↑4600lm/4200lm↓	↑4600lm/4200lm↓	↑4600lm/4200lm↓
UGR	<17	<17	<17
Color Rendering Index	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑110°/90°↓	↑110°/90°↓	↑110°/90°↓
CCT	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K
Colour consistency SDCM	< 3	< 3	< 3
Dimming	Knobdimming	Knobdimming	Knobdimming
Sensor	NO	Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL	6063AL
Protection Level	IP 20	IP 20	IP 20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	12.5kg	12.5kg	12.5kg
Package size	1210*500*120mm	1210*500*120mm	1210*500*120mm
20GP	350pcs	350pcs	350pcs
40GP	730pcs	730pcs	730pcs

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Of ce: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in speci cation are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.