



Inheriting classic design, round corner structure, perfect assembly details makes exquisite appearance with rich texture. The product emits downwards and adopts a diffuser plate of a microprism structure to realize an anti-glare function, the beam angle is about 90 degrees, the upward beam angle is 110 degrees. DIY assembly, no need professionals, portable on the side of the desktop, easy installation, flexible using. Typical value is 110LM/W, flicker free, KNOB dimming, 50% DIRECT / 50% INDIRECT synchronous dimming control, and other intelligent control like motion sensor and day light sensor etc. The main materials are aluminum profiles, steel and PMMA. The item is especially designed for WHOLESALER and SPECIFIED sales channels.

### Features

---

Simple and exquisite industrial design with rich texture

---

UGR<18, lighting uniform and healthy

---

Integrated packaging, easy for transportation and online sales

---

Support smart control functions

- Knob dimming
- Motion sensor
- Daylight sensor

---

5 years warranty

---

### Application Areas



---

For personal offices, public offices and other office space.

---



## Technical data

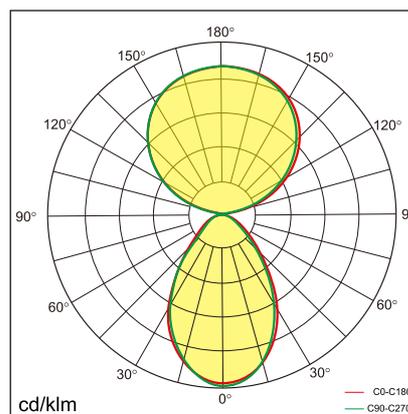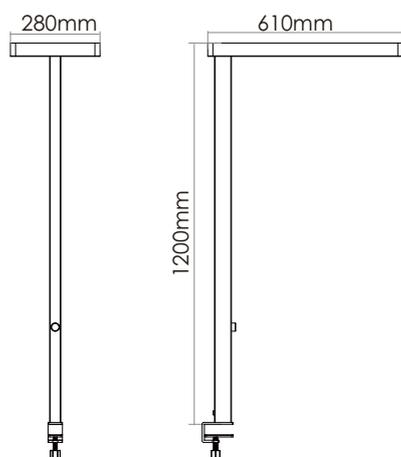

| Item No.                | BHOT-1206030-BN | BHOT-1206030-BM | BHOT-1206030-BD                  |
|-------------------------|-----------------|-----------------|----------------------------------|
| Input Power             | ↑30W/30W↓       | ↑30W/30W↓       | ↑30W/30W↓                        |
| Input Voltage           | AC200~240V      | AC200~240V      | AC200~240V                       |
| Power Factor            | ≥0.9            | ≥0.9            | ≥0.9                             |
| Luminous Flux           | ↑3500lm/3100lm↓ | ↑3500lm/3100lm↓ | ↑3500lm/3100lm↓                  |
| UGR                     | <18             | <18             | <18                              |
| Color Rendering Index   | >80             | >80             | >80                              |
| Life Time               | L80(B10)50,000H | L80(B10)50,000H | L80(B10)50,000H                  |
| Beam Angle              | ↑110°/90°↓      | ↑110°/90°↓      | ↑110°/90°↓                       |
| CCT                     | 3000/4000/6000K | 3000/4000/6000K | 3000/4000/6000K                  |
| Colour consistency SDCM | < 3             | < 3             | < 3                              |
| Dimming                 | Knobdimming     | Knobdimming     | Knobdimming                      |
| Sensor                  | NO              | Motion sensor   | Daylight sensor<br>Motion sensor |
| Housing Color           | Silver/White    | Silver/White    | Silver/White                     |
| Fixture Materia         | 6063AL          | 6063AL          | 6063AL                           |
| Protection Level        | IP20            | IP20            | IP20                             |
| Storage Temperature     | -40°C~+80°C     | -40°C~+80°C     | -40°C~+80°C                      |
| Working Temperature     | -20°C~+45°C     | -20°C~+45°C     | -20°C~+45°C                      |
| Net Weight              | 4.5kg           | 4.5kg           | 4.5kg                            |
| Package size            | 1415*460*110mm  | 1415*460*110mm  | 1415*460*110mm                   |
| 20GP                    | 320pcs          | 320pcs          | 320pcs                           |
| 40GP                    | 740pcs          | 740pcs          | 740pcs                           |

## Technical data

| Item No.                | BHOT-1208040-BN | BHOT-1208040-BM | BHOT-1208040-BD                  |
|-------------------------|-----------------|-----------------|----------------------------------|
| Input Power             | ↑40W/40W↓       | ↑40W/40W↓       | ↑40W/40W↓                        |
| Input Voltage           | AC200~240V      | AC200~240V      | AC200~240V                       |
| Power Factor            | ≥0.9            | ≥0.9            | ≥0.9                             |
| Luminous Flux           | ↑4600lm/4200lm↓ | ↑4600lm/4200lm↓ | ↑4600lm/4200lm↓                  |
| UGR                     | <18             | <18             | <18                              |
| Color Rendering Index   | >80             | >80             | >80                              |
| Life Time               | L80(B10)50,000H | L80(B10)50,000H | L80(B10)50,000H                  |
| Beam Angle              | ↑110°/90°↓      | ↑110°/90°↓      | ↑110°/90°↓                       |
| CCT                     | 3000/4000/6000K | 3000/4000/6000K | 3000/4000/6000K                  |
| Colour consistency SDCM | < 3             | < 3             | < 3                              |
| Dimming                 | Knobdimming     | Knobdimming     | Knobdimming                      |
| Sensor                  | NO              | Motion sensor   | Daylight sensor<br>Motion sensor |
| Housing Color           | Silver/White    | Silver/White    | Silver/White                     |
| Fixture Material        | 6063AL          | 6063AL          | 6063AL                           |
| Protection Level        | IP 20           | IP 20           | IP 20                            |
| Storage Temperature     | -40°C~+80°C     | -40°C~+80°C     | -40°C~+80°C                      |
| Working Temperature     | -20°C~+45°C     | -20°C~+45°C     | -20°C~+45°C                      |
| Net Weight              | 4.5kg           | 4.5kg           | 4.5kg                            |
| Package size            | 1415*460*110mm  | 1415*460*110mm  | 1415*460*110mm                   |
| 20GP                    | 320pcs          | 320pcs          | 320pcs                           |
| 40GP                    | 740pcs          | 740pcs          | 740pcs                           |

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Of ce: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.