


KEY-P Pendant luminaires

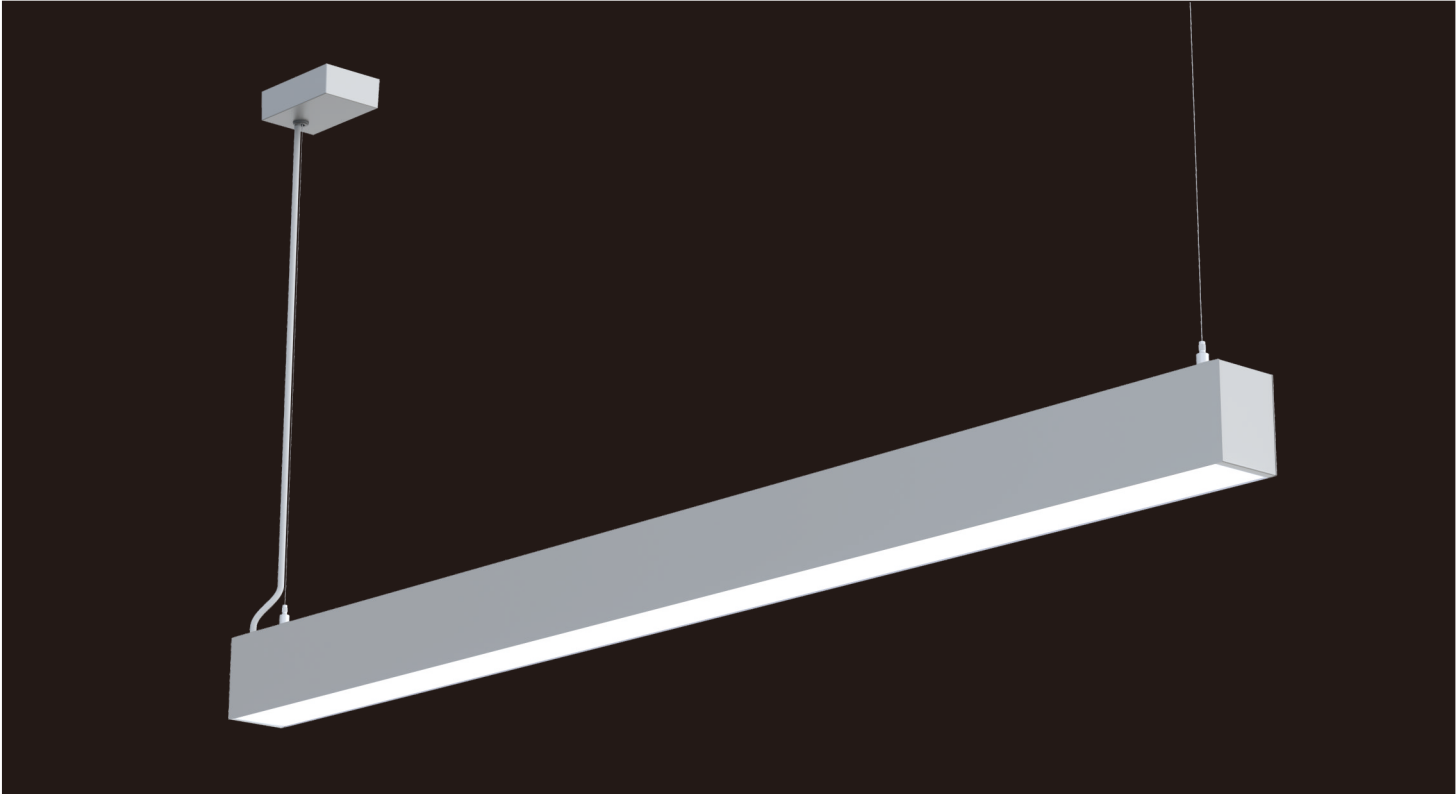

Simply and reasonable structure design with excellent craft work. Appearance with rich texture. Flexible diffuser and flexible prism mask design, no light leakage from seams, UGR can be less than 19, Reliable heat dissipation system. 5 years warranty. Typical value up to 130lm/W with flicker freely. 1-10V and Dali synchronous dimming, support CASAMBI wireless system. Profile aluminum, Suspension installation , Easy & Fast.

Features



- Simple and rich textured design
- Direct, indirect and uniform lighting, healthy
- Flexible prisma plate, Flexible diffuser
- Light efficiency could be 130LM/W
- Simple, easy and quick installation
- Support for smart control functions
 - DALI dimming
 - 1-10V dimming
 - tunable white
 - CASAMBI
- 5 years warranty

Application Areas

For open-plan office, reception, training room,cafeteria,etc.



Technical data

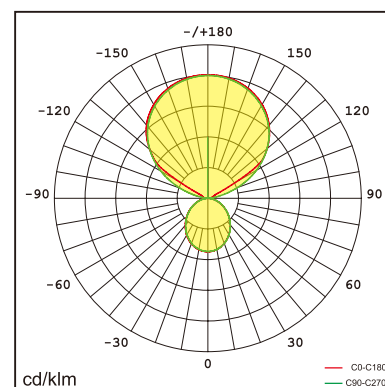
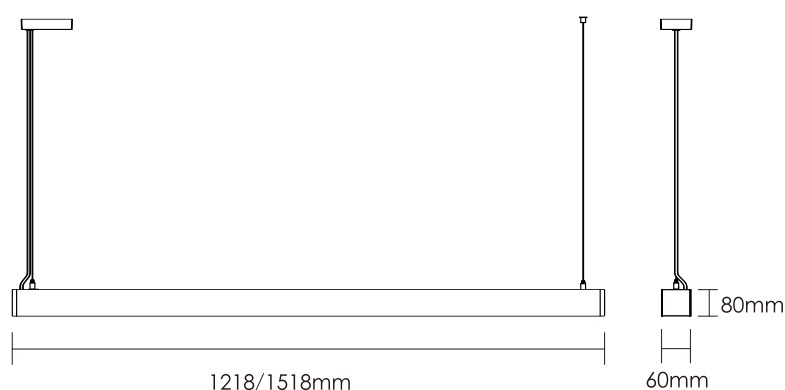


Item No.	BKEP-1205015-NN	BKEP-1205015-VN	BKEP-1205015-DN
Input Power	↑35W/15W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑4550lm/1950lm ↓		
UGR	<19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 110°/90° ↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.75kg		
Package size	1355*435*275mm (8pcs) non-cascading , 1295*435*275mm (8pcs) cascade		
20GP	140 boxes / 1120 PCS non-cascading , 147 boxes / 1176 PCS cascade		
40GP	294 boxes / 2392 PCS non-cascading , 315 boxes / 2520 PCS cascade		

Technical data

Item No.	BKEP-1506018-NN	BKEP-1506018-VN	BKEP-1506018-DN
Input Power	↑42W/18W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑5460lm/2340lm ↓		
UGR	<19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 110°/90° ↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP 20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	4.25kg		
Package size	1665*335*280mm (6pcs) non-cascading , 1600*335*280mm (6pcs) cascade		
20GP	140 boxes / 840 PCS non-cascading , 165 boxes / 990 PCS cascade		
40GP	294 boxes / 1764 PCS non-cascading , 350 boxes / 2100 PCS cascade		

Technical data

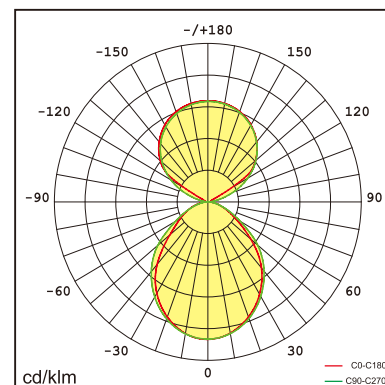
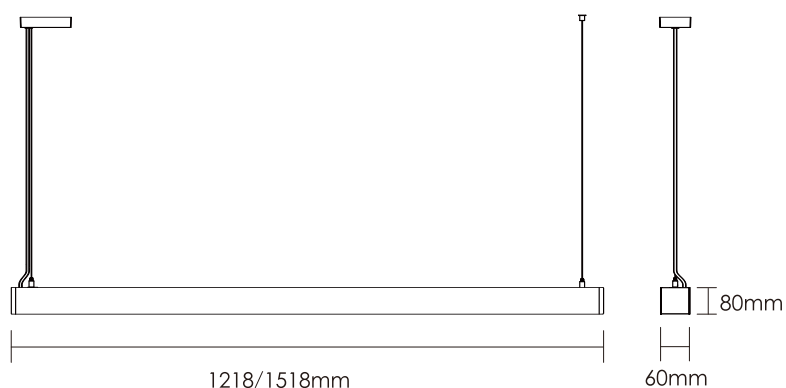


Item No.	BKEP-1205030-NN	BKEP-1205030-VN	BKEP-1205030-DN
Input Power	↑20W/30W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑2500lm/3750lm ↓		
UGR	>19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 110°/90° ↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.75kg		
Package size	1355*435*275mm (8pcs) non-cascading , 1295*435*275mm (8pcs) cascade		
20GP	140 boxes / 1120 PCS non-cascading , 147 boxes / 1176 PCS cascade		
40GP	294 boxes / 2392 PCS non-cascading , 315 boxes / 2520 PCS cascade		

Technical data

Item No.	BKEP-1506036-NN	BKEP-1506036-VN	BKEP-1506036-DN
Input Power	↑24W/36W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	↑3000lm/4500lm ↓		
UGR	>19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 110°/90° ↓		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP 20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	4.25kg		
Package size	1665*335*280mm (6pcs) non-cascading , 1600*335*280mm (6pcs) cascade		
20GP	140 boxes / 840 PCS non-cascading , 165 boxes / 990 PCS cascade		
40GP	294 boxes / 1764 PCS non-cascading , 350 boxes / 2100 PCS cascade		

Technical data

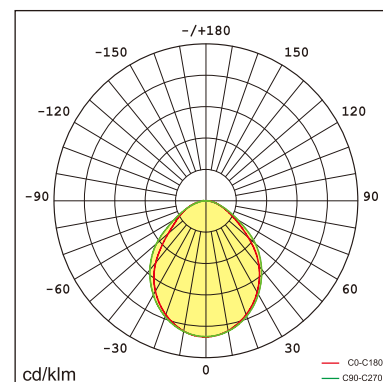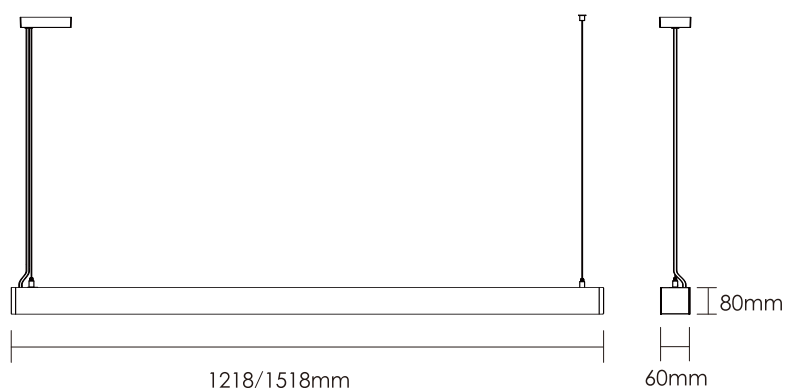

Item No.	BKEP-1203030-NN	BKEP-1203030-VN	BKEP-1203030-DN
Input Power	30W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	3600lm ↓		
UGR	>19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	90°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	3.75kg		
Package size	1355*435*275mm (8pcs) non-cascading , 1295*435*275mm (8pcs) cascade		
20GP	140 boxes / 1120 PCS non-cascading , 147 boxes / 1176 PCS cascade		
40GP	294 boxes / 2392 PCS non-cascading , 315 boxes / 2520 PCS cascade		

Technical data

Item No.	BKEP-1504040-NN	BKEP-1504040-VN	BKEP-1504040-DN
Input Power	40W↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux	4800lm ↓		
UGR	>19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	90°		
CCT	3000/4000/6000K		
Colour consistency SDCM	< 3		
Dimming	NO	1-10V dimming	DALI dimming
Sensor	NO		
Housing Color	Silver/White		
Fixture Materia	6063AL		
Protection Level	IP 20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	4.25kg		
Package size	1665*335*280mm (6pcs) non-cascading , 1600*335*280mm (6pcs) cascade		
20GP	140 boxes / 840 PCS non-cascading , 165 boxes / 990 PCS cascade		
40GP	294 boxes / 1764 PCS non-cascading , 350 boxes / 2100 PCS cascade		

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9,Building 3,Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.
 Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

