



The FREE-P come with minimalist design, excellent material selection and production technology, exquisite appearance, and rich texture. The direct light adopts a diffusion plate with microprism structure to realize anti-glare function. Typical light efficiency 125LM/W, flicker free, 60% DIRECT / 40% INDIRECT lighting. Suspended installation, very simple and convenient. It can realize 0-10V or DALI synchronous dimming ,and even support wireless control systems such as CASAMBI .

Features

Direct and Indirect lighting with impressive light uniformity

UGR<19

Support DALI and 1-10V dimming

Support CASAMBI

Widely used in public working area



5 years warranty

Application Areas

For open-plan office, Individual office, meeting room, Guest room , etc.






Technical data

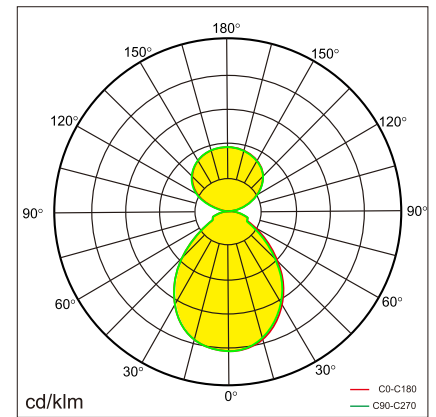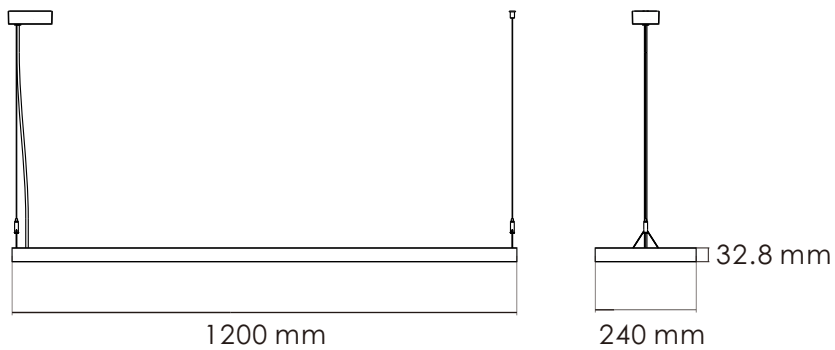

Item No.	BFRP-1205030-NN	BFRP-1205030-VN	BFRP-1205030-DN
Input Power	↑20W/30W↓	↑20W/30W↓	↑20W/30W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9
Luminous Flux(±5%)	↑2700lm/3650lm↓	↑2700lm/3650lm↓	↑2700lm/3650lm↓
UGR	<19	<19	<19
Color Rendering Index	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑115° / 80° ↓	↑115° / 80° ↓	↑115° / 80° ↓
CCT	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K
Colour consistency SDCM	< 3	< 3	< 3
Dimming	No	1-10V dimming	DALI dimming
Sensor	No	No	No
Housing Color	Silver/White	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL	6063AL
Protection Level	IP20	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	4.85kg	4.85kg	4.85kg
Package size	1290*595*205mm	1290*595*205mm	1290*595*205mm
20GP	564pcs	564pcs	564pcs
40GP	1232pcs	1232pcs	1232pcs

Technical data

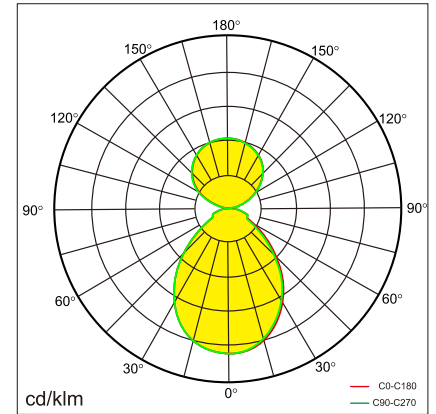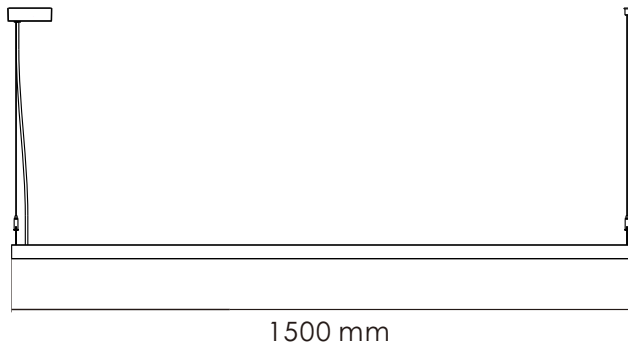

Item No.	BFRP-1506036-NN	BFRP-1506036-VN	BFRP-1506036-DN
Input Power	↑24W/36W↓	↑24W/36W↓	↑24W/36W↓
Input Voltage	AC200~240V	AC200~240V	AC200~240V
Power Factor	≥0.9	≥0.9	≥0.9
Luminous Flux(±5%)	↑3240lm/4380lm↓	↑3240lm/4380lm↓	↑3240lm/4380lm↓
UGR	<19	<19	<19
Color Rendering Index	>80	>80	>80
Life Time	L80(B10)50,000H	L80(B10)50,000H	L80(B10)50,000H
Beam Angle	↑115° / 80° ↓	↑115° / 80° ↓	↑115° / 80° ↓
CCT	3000/4000/6000K	3000/4000/6000K	3000/4000/6000K
Colour consistency SDCM	< 3	< 3	< 3
Dimming	No	1-10V dimming	DALI dimming
Sensor	No	No	No
Housing Color	Silver/White	Silver/White	Silver/White
Fixture Materia	6063AL	6063AL	6063AL
Protection Level	IP20	IP20	IP20
Storage Temperature	-40°C~+80°C	-40°C~+80°C	-40°C~+80°C
Working Temperature	-20°C~+45°C	-20°C~+45°C	-20°C~+45°C
Net Weight	5.6kg	5.6kg	5.6kg
Package size	1590*595*205mm	1590*595*205mm	1590*595*205mm
20GP	528pcs	528pcs	528pcs
40GP	1144pcs	1144pcs	1144pcs

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: 3&4th F, Building A3, Xin-Gui-Yuan Industrial Park, DaFu Road, GuanLan Town, ShenZhen, China 518110

Office: 5th F, Building A1, Zhang-Ge Techno Park, GuanLan Town, ShenZhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.
Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.