

Simply and reasonable structure design with excellent craft work . Appearance with rich texture. Reliable heat dissipation system. 5 years warranty . Typical value up to 110lm/W with flicker freely. 70% Direct & 30% Indirect lights. 1-10V and Dali synchronous dimming, support CASAMBI wireless system . Profile aluminum, PMMA as main materials, Suspension installation , Easy & Fast.

Features

Simple and rich textured design

Direct , indirect and uniform lighting, healthy

Light efficiency could be 110LM/W

Simple, easy and quick installation

Support for smart control functions

- DALI dimming
 - 1-10V dimming
 - tunable white
 - CASAMBI
-



5 years warranty

Application Areas

For open-plan office, Individual office, meeting room, guestroom, etc.



Technical data

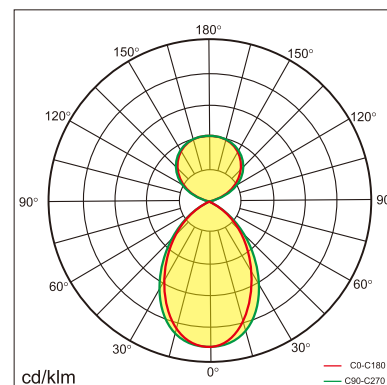
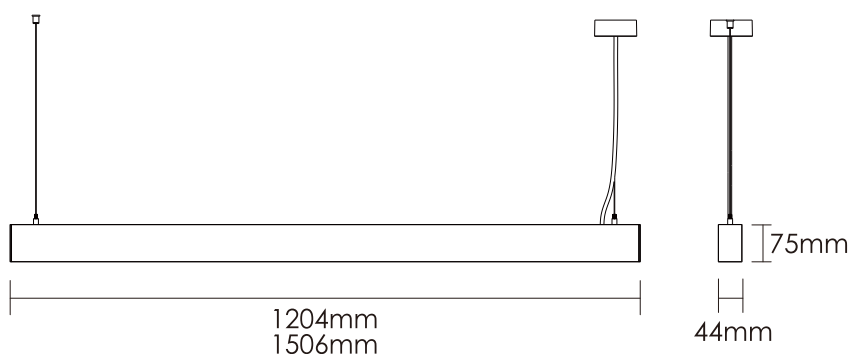


| Item No. | BLIP-1204832-NN | BLIP-1204832-VN | BLIP-1204832-DN |
|-------------------------|-----------------|-----------------|-----------------|
| Input Power | ↑16W/32W↓ | | |
| Input Voltage | AC200~240V | | |
| Power Factor | ≥0.9 | | |
| Luminous Flux | ↑1800lm/3500lm↓ | | |
| UGR | <21 | | |
| Color Rendering Index | >80 | | |
| Life Time | L80(B10)50,000H | | |
| Beam Angle | ↑ 110°/80° ↓ | | |
| CCT | 3000/4000/6000K | | |
| Colour consistency SDCM | < 3 | | |
| Dimming | NO | 1-10V dimming | DALI dimming |
| Sensor | NO | | |
| Housing Color | Silver/White | | |
| Fixture Materia | 6063AL | | |
| Protection Level | IP20 | | |
| Storage Temperature | -40°C~+80°C | | |
| Working Temperature | -20°C~+45°C | | |
| Net Weight | 2.85kg | | |
| Package size | 1360*315*275mm | | |
| 20GP | 1624PCS | | |
| 40GP | 3600PCS | | |

Technical data

| Item No. | BLIP-1506040-NN | BLIP-1506040-VN | BLIP-1506040-DN |
|-------------------------|-----------------|-----------------|-----------------|
| Input Power | ↑20W/40W↓ | | |
| Input Voltage | AC200~240V | | |
| Power Factor | ≥0.9 | | |
| Luminous Flux | ↑2200lm/4400lm↓ | | |
| UGR | <21 | | |
| Color Rendering Index | >80 | | |
| Life Time | L80(B10)50,000H | | |
| Beam Angle | ↑ 110°/80° ↓ | | |
| CCT | 3000/4000/6000K | | |
| Colour consistency SDCM | < 3 | | |
| Dimming | NO | 1-10V dimming | DALI dimming |
| Sensor | NO | | |
| Housing Color | Silver/White | | |
| Fixture Material | 6063AL | | |
| Protection Level | IP 20 | | |
| Storage Temperature | -40°C~+80°C | | |
| Working Temperature | -20°C~+45°C | | |
| Net Weight | 3.72kg | | |
| Package size | 1660*315*275mm | | |
| 20GP | 1328PCS | | |
| 40GP | 2944PCS | | |

Technical data

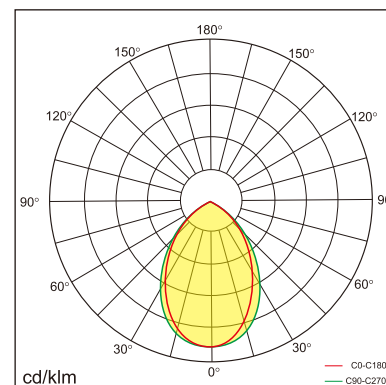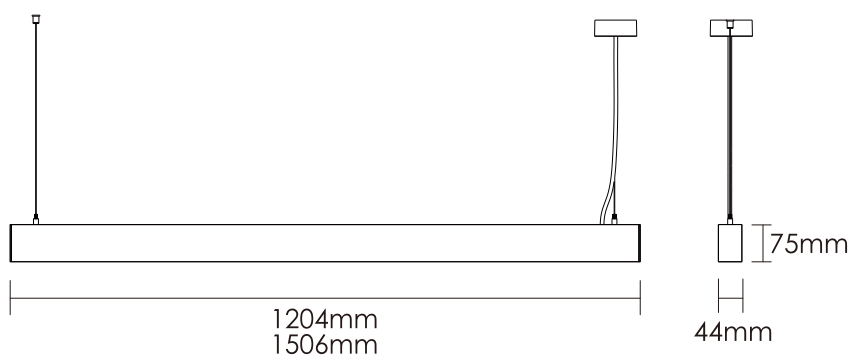

| Item No. | BLIP-1204040-NN | BLIP-1204040-VN | BLIP-1204040-DN |
|-------------------------|-----------------|-----------------|-----------------|
| Input Power | 40W | | |
| Input Voltage | AC200~240V | | |
| Power Factor | ≥0.9 | | |
| Luminous Flux | 3600lm | | |
| UGR | <21 | | |
| Color Rendering Index | >80 | | |
| Life Time | L80(B10)50,000H | | |
| Beam Angle | 80° | | |
| CCT | 3000/4000/6000K | | |
| Colour consistency SDCM | < 3 | | |
| Dimming | NO | 1-10V dimming | DALI dimming |
| Sensor | NO | | |
| Housing Color | Silver/White | | |
| Fixture Materia | 6063AL | | |
| Protection Level | IP20 | | |
| Storage Temperature | -40°C~+80°C | | |
| Working Temperature | -20°C~+45°C | | |
| Net Weight | 2.85kg | | |
| Package size | 1360*315*275mm | | |
| 20GP | 1624PCS | | |
| 40GP | 3600PCS | | |

Technical data

| Item No. | BLIP-1505050-NN | BLIP-1505050-VN | BLIP-1505050-DN |
|-------------------------|-----------------|-----------------|-----------------|
| Input Power | 50W | | |
| Input Voltage | AC200~240V | | |
| Power Factor | ≥0.9 | | |
| Luminous Flux | 4500lm | | |
| UGR | <21 | | |
| Color Rendering Index | >80 | | |
| Life Time | L80(B10)50,000H | | |
| Beam Angle | 80° | | |
| CCT | 3000/4000/6000K | | |
| Colour consistency SDCM | < 3 | | |
| Dimming | NO | 1-10V dimming | DALI dimming |
| Sensor | NO | | |
| Housing Color | Silver/White | | |
| Fixture Materia | 6063AL | | |
| Protection Level | IP 20 | | |
| Storage Temperature | -40°C~+80°C | | |
| Working Temperature | -20°C~+45°C | | |
| Net Weight | 3.7kg | | |
| Package size | 1660*315*275mm | | |
| 20GP | 1328PCS | | |
| 40GP | 2944PCS | | |

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

