


ROMAN-F2 free standing luminaire

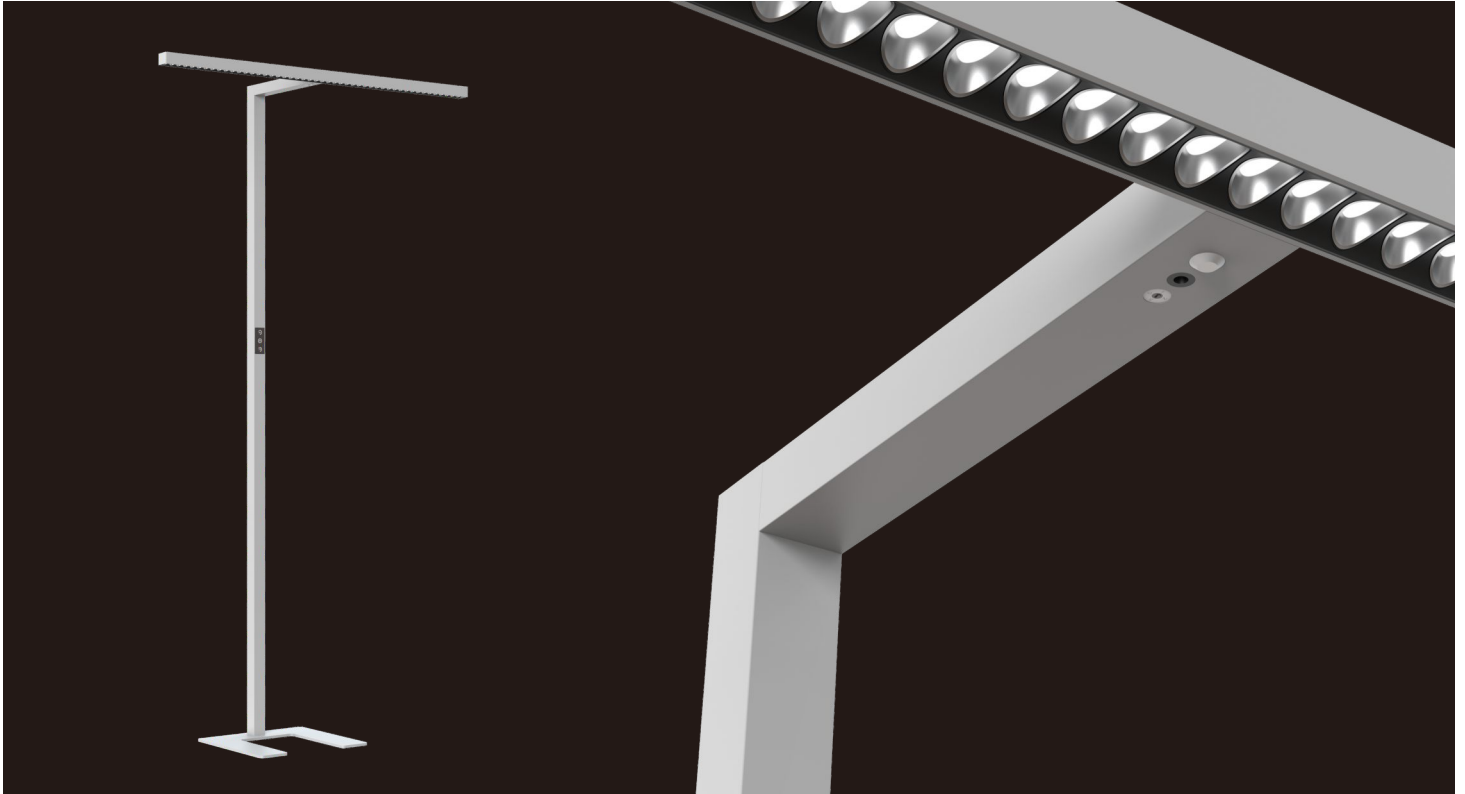

ROMAN-F2 offers a sleek and imaginative design, perfect for office lighting. With special micro reflectors and anti-glare covers, it achieves $UGR < 11$ for comfortable, soft lighting. Suitable for four desks, it delivers uniform illumination with separate controls for direct & indirect lights. Smart functions like motion sensors and daylight sensors are supported. Made with aluminum, steel, and PC materials, it's easy to install without professional assistance.

Features

Compact and quality appearance, patent design with rich texture and visual impact

High lumen efficiency reach to 150LM/W, fitting with a 2454lm direct and 9130lm indirect lights, total 11584lm lumen output

$UGR < 11$, lighting uniform and healthy

Direct and indirect light control Individually

SDCM < 3


Support for smart control functions

- Touch panel dimming
- Motion sensor
- Day light sensor
- CASAMBI(Customizable)
- SWARM(Customizable)
- HCL(Customizable)


5 years warranty

Application Areas

Open-plan office, individual office, etc.

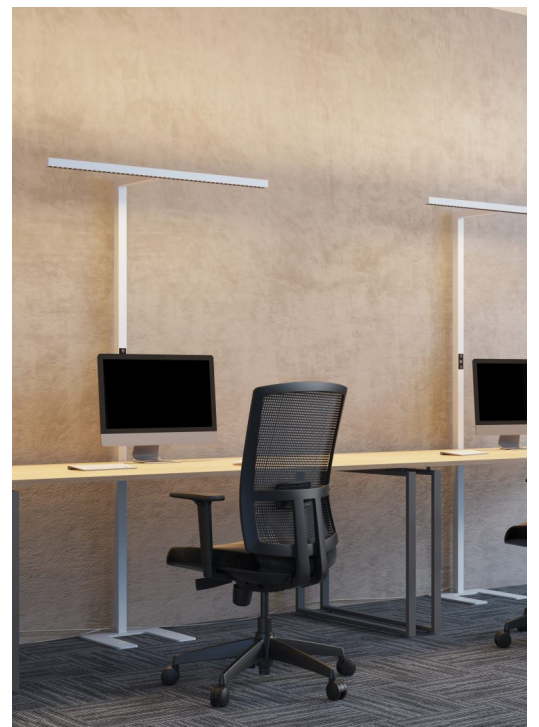

Technical data

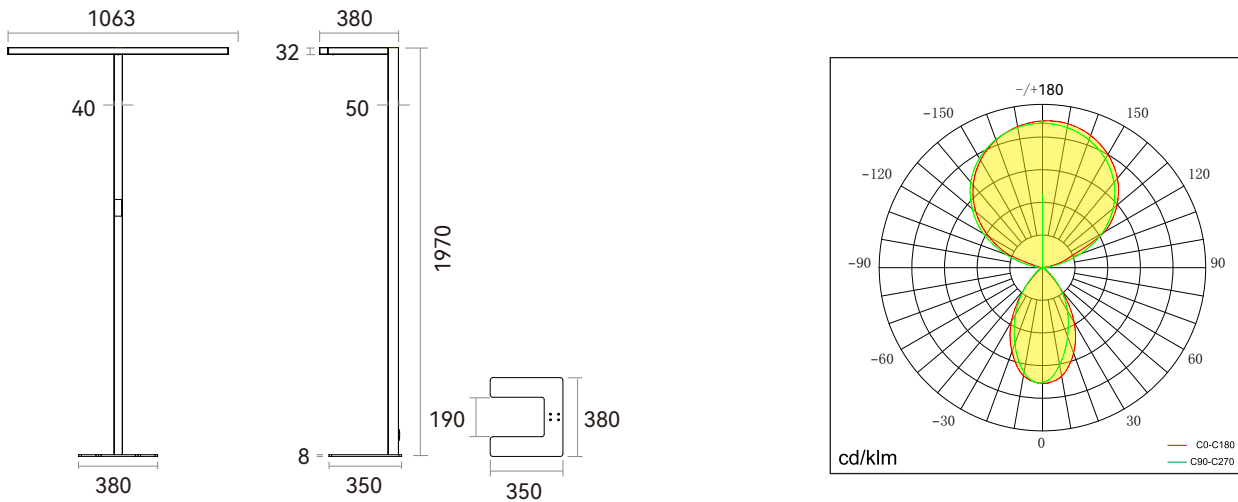

| Item No. | BROF2-1908020-BD | BROF2-1908020-CD |
|-------------------------|---------------------------------|-------------------|
| Input Power(±10%) | ↑ 60W/20W ↓ | |
| Input Voltage | AC200~240V | |
| Power Factor | ≥0.9 | |
| Luminous Flux(±10%) | ↑ 9130lm/2454lm ↓ | ↑ 8800lm/2000lm ↓ |
| UGR | <11 | |
| Color Rendering Index | >80 | |
| Life Time | L80(B10)50,000H | |
| Beam Angle | ↑ 115°/60° ↓ | |
| CCT(±200K) | 3000/4000/6000K | 3000-5700K |
| Colour consistency SDCM | < 3 | |
| Dimming | Touch panel dimming | |
| Sensor | Daylight sensor & Motion sensor | |
| Housing Color | Silver / White / Black | |
| Fixture Materia | 6063AL | |
| Protection Level | IP20 | |
| Storage Temperature | -40°C~+80°C | |
| Working Temperature | -20°C~+45°C | |

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.