


# LENO-F 2.0 free standing luminaire

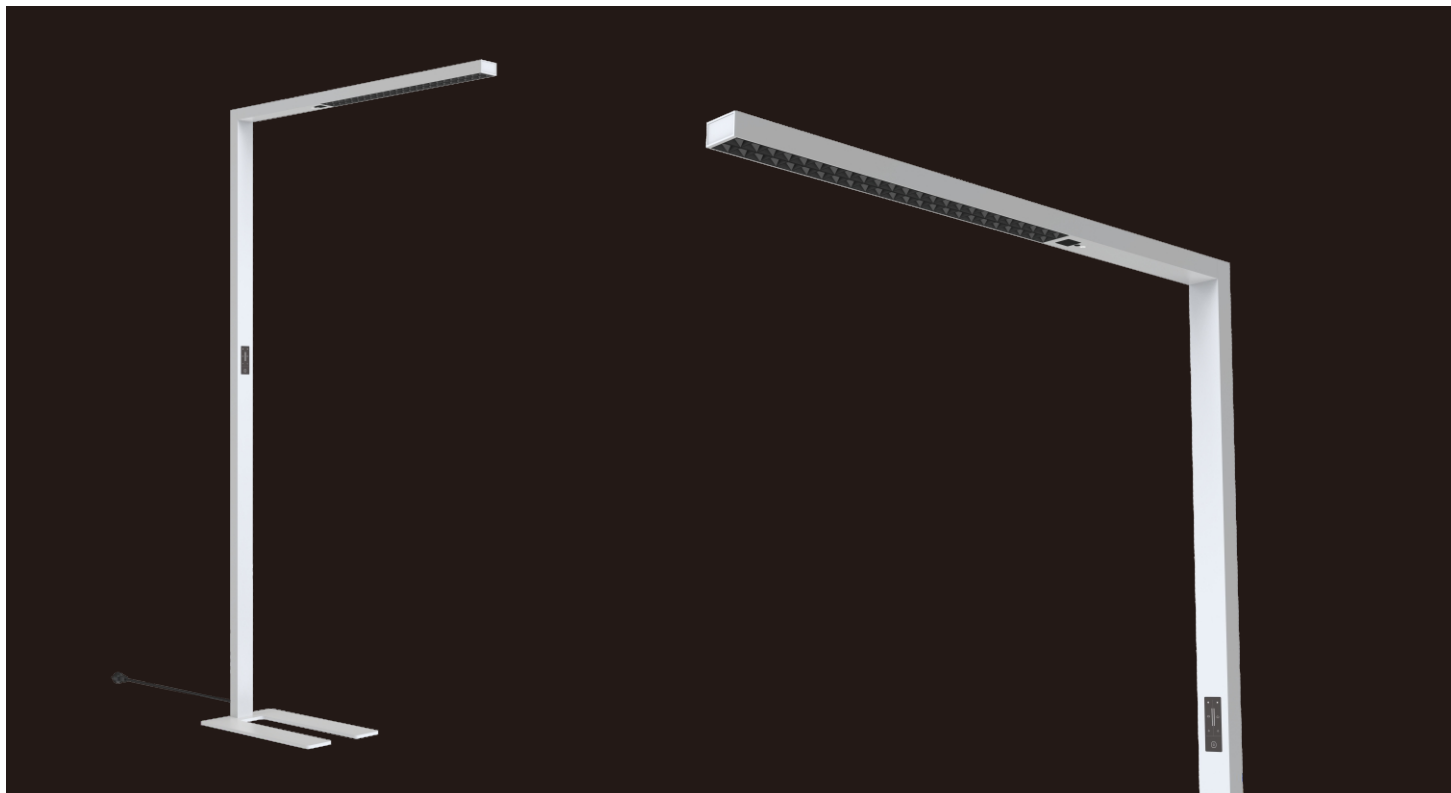

With extremely simple design and excellent craftwork, exquisite appearance looks with rich of texture. Lamp is designed with special Direct/Indirect lighting and 50°(Direct) & 115°(Indirect) beam angle. Collocated with micro reflector and anti-glare cover, UGR value is as low as 6.  $L_{max} \geq 65^\circ < 1000 \text{ cd/m}^2$ . Adopting DIY assembly structure with no need of professionals, light can be placed at the desk side and convenient to be moved.

## Features

Compact and quality appearance, patent design with rich texture and visual impact

High lumen efficiency reach to 145lm/W, fitting with a 2300lm direct and 9300lm indirect lights, total 11600lm lumen output

UGR<6, lighting uniform and healthy

$L_{max} \geq 65^\circ < 1000 \text{ cd/m}^2$

Direct and indirect light control Individually

Support for smart control functions

- Touch panel dimming
- Presence sensor
- Motion sensor(optional)
- Day light sensor
- Tunable white
- CASAMBI(Customizable)
- HCL(Customizable)
- SWARM(Customizable)



5 years warranty

## Application Areas

Open-plan office, individual office, etc.




# Technical data

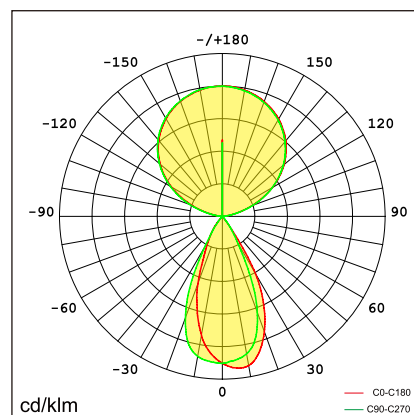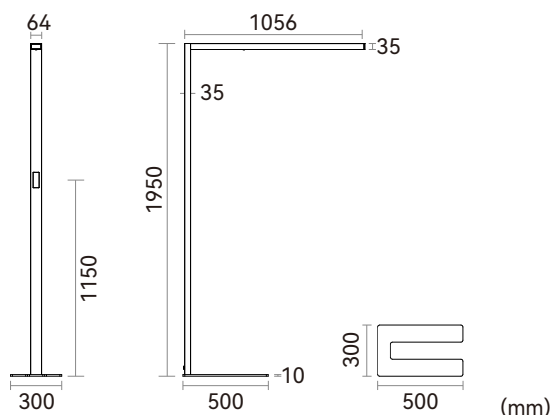

Item No.	BLEF-1908020-BD-01	BLEF-1908020-BD-02	BLEF-1908020-CD-01	BLEF-1908020-CD-02
Input Power(±10%)	80W ( ↑ 60W/20W ↓ )			
Input Voltage	AC200~240V			
Power Factor	≥0.9			
Luminous Flux(±10%)	11600lm ( ↑ 9300lm/2300lm ↓ )		11200lm ( ↑ 8950lm/2250lm ↓ )	
UGR	<6			
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	↑ 115°/50° ↓			
CCT(±200K)	3000/4000/6000K		3000~5700K	
Colour consistency SDCM	<3			
Dimming	Touchpaneldimming			
Sensor	Presence sensor Day light sensor	Motion sensor Day light sensor	Presence sensor Day light sensor	Motion sensor Day light sensor
Housing Color	Silver / White / Black			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	-40°C~-80°C			
Working Temperature	-20°C~+40°C			
Net Weight	13.4kg			
Gross Weight	18kg			
Package size	2045*380*140mm (1pcs)			
20GP	272pcs			
40GP	578pcs			

## Packaging

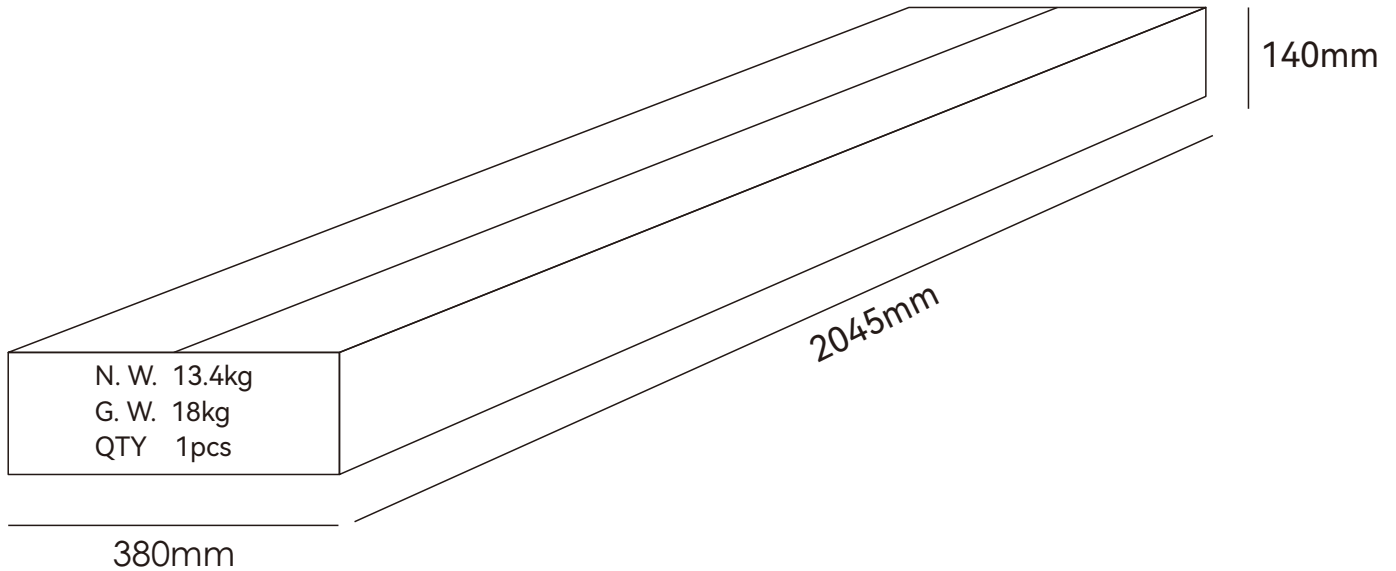

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

