

button-L is a of high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and PC optical concept, Sophisticated surface finish gives a high end appearance of texture. Its exquisite surface treatment provides good weather resistance with an IP65 protection grade. button-L has three key advantages: anti-glare lighting, wide irradiation range, and excellent illumination uniformity. We offer 5 years warranty,main uses architectural addition to important business and commercial buildings, corporate headquarters, parks, recreational areas and gardens.

Features

Large angle light distribution

No glare, Long range, Uniform light

Small size

Lamp protection grade IP65/IK08




5 years warranty

Application Areas

commercial buildings, corporate headquarters, parks, recreational areas and gardens, etc.






Technical data

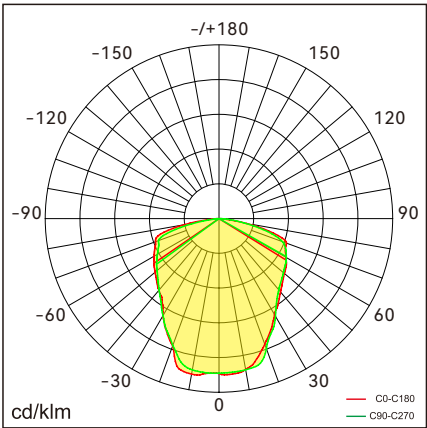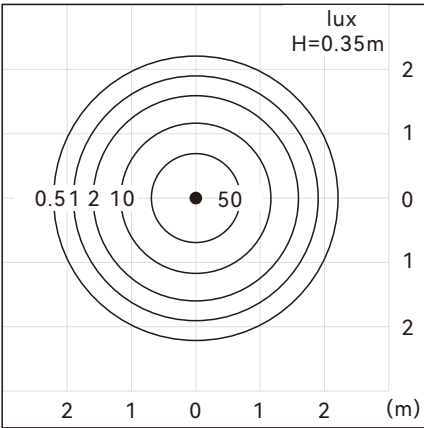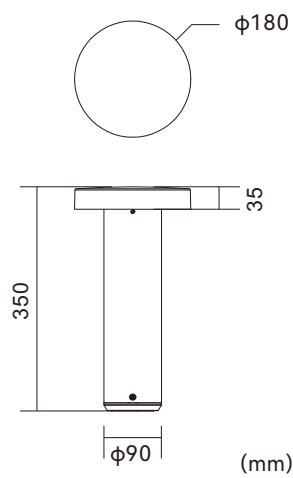

Item No.	B1TL0-06270-NN	B1TL0-06370-NN	B1TL0-06570-NN	B1TL0-06270-DN	B1TL0-06370-DN	B1TL0-06570-DN
Input Power(±10%)	6.5W					
Input Voltage	AC200~240V					
Luminous Flux(±10%)	550lm					
Colour temperature(±10%)	2700K	3000K	4000K	2700K	3000K	4000K
Beam Angle	115°					
Color Rendering Index	>80					
Life Time	L70(B50)50,000H					
Colour consistency SDCM	<3					
Dimming	NO			DALI		
Sensor	NO					
Housing Color	Black/White/Silver/Dark Grey					
Fixture Materia	ADC12+6063AL+PC					
Protection Level	IP65/IK08					
Storage Temperature	-30°C~+60°C					
Working Temperature	-30°C~+45°C					
Net Weight	2.3kg					
size	φ180*350mm					
Package size	550*238*231mm (1PCS)					
20GP	1070PCS					
40GP	2210PCS					

Technical data

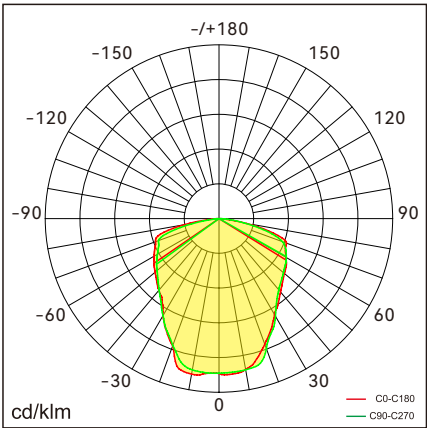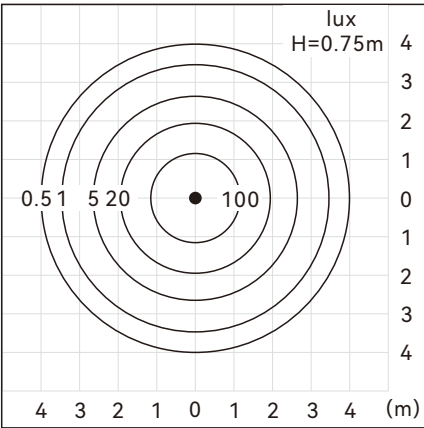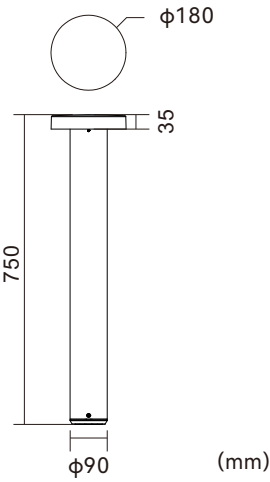

Item No.	B1TL0-12270-NN	B1TL0-12370-NN	B1TL0-12570-NN	B1TL0-12270-DN	B1TL0-12370-DN	B1TL0-12570-DN
Input Power(±10%)	12W					
Input Voltage	AC200~240V					
Luminous Flux(±10%)	1050lm					
Colour temperature(±10%)	2700K	3000K	4000K	2700K	3000K	4000K
Beam Angle	115°					
Color Rendering Index	>80					
Life Time	L70(B50)50,000H					
Colour consistency SDCM	<3					
Dimming	NO			DALI		
Sensor	NO					
Housing Color	Black/White/Silver/Dark Grey					
Fixture Materia	ADC12+6063AL+PC					
Protection Level	IP65/IK08					
Storage Temperature	-30°C~+60°C					
Working Temperature	-30°C~+45°C					
Net Weight	3kg					
size	φ180*750mm					
Package size	950*238*231mm (1PCS)					
20GP	610PCS					
40GP	1260PCS					




J Anchor Bolt Kit

Φ120x200mm



Expansion screw

M6-Φ8x80mm



M682-B(3P)

IP68 Waterproof connector

72x21mm



M684-B(5P)

IP68 Waterproof connector

99x25mm



M685-Y

IP68 Waterproof connector

140x72mm