



Pudding is a compact and exquisitely designed portable lamp, specifically crafted for home and outdoor social gatherings. Available in multiple stylish finishes. Featuring advanced lens-based optics and softly illuminated side walls, it delivers exceptionally comfortable lighting. A touch-sensitive button on the lamp head enables effortless on/off operation and dimming control. With its rechargeable head, rapid charging capability, and impressive 6-8 hour runtime, this lamp features real-time power status indication. Magnetic fixation and flexible angle adjustment enable versatile installation options, making it ideal for diverse indoor and outdoor applications. Rated IP54 (dust/water resistant) and Ik06 (impact resistant) for enhanced durability.

## Features

4.75 hours quick-charging battery delivering 6-8 hours of continuous operation

130° Wide beam angle, Providing broad illumination

Optical lens with subtle sidelight emission, deliver comfortable light

Charge with a data cable

Magnetic mounting with multiple installation for indoor/outdoor applications;

Easy for storage



Lamp protection grade IP54/Ik06

## Application Areas

Meet various indoor and outdoor lighting needs.



# Technical data

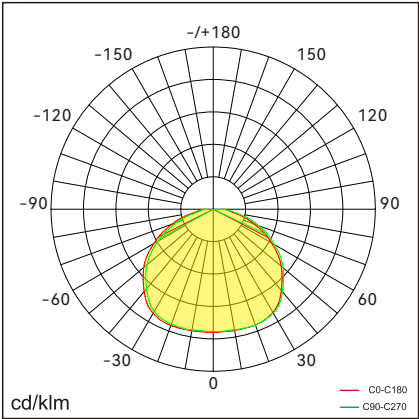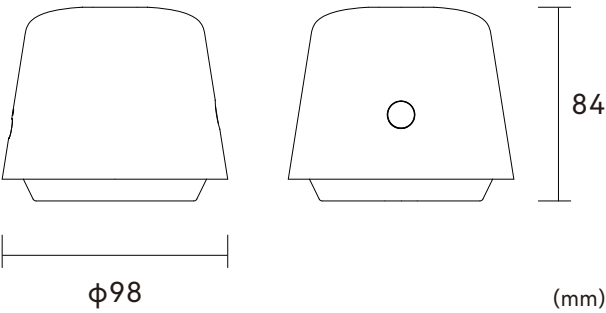

Item No.	B9PU0-04280-TN		B9PU0-04380-TN	B9PU0-04580-TN
Input Power	4W			
Output	DC 5.2-5.6V/600mA			
Batteria	Triple-Cell Lithium-Ion Battery Pack (18650 Li-ion Battery 3.7V 2200mAh)			
Battery Run time	In maximum power and constant brightness, usable time is 6-8 h			
Charge time	4.75 h ( $\pm 0.5$ h)			
Power Factor	$\geq 0.9$			
Luminous Flux( $\pm 5\%$ )	400 lm			
Colour temperature	2700K		3000K	4000K
Color Rendering Index	$> 90$			
Life Time	L70(B50)50,000H			
Beam Angle	130°			
Colour consistency SDCM	$< 3$			
Dimming	Touch dimming			
Sensor	NO			
Housing Color	Silver / White / Black / Dark Grey / Madeira brown / Blackberry leaf green / Hermosa pink / Spruce blue			
Fixture Materia	ADC12+PC			
Protection Level	IP54/IK06			
Storage Temperature	$-30^{\circ}\text{C} \sim +60^{\circ}\text{C}$			
Working Temperature	$-30^{\circ}\text{C} \sim +45^{\circ}\text{C}$			




**Table Lamp**

215x152x395mm




**Hanging Rope**

Φ20x148mm

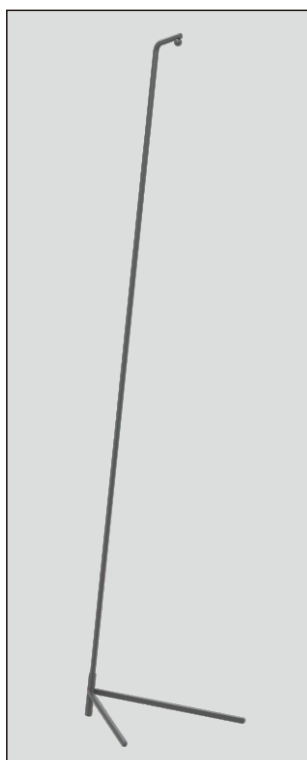

**Free Standing Lamp**

415x480x1800mm

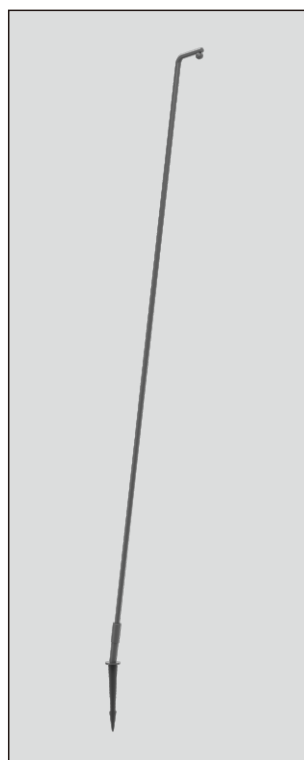

**Spike**

440x43x2015mm