


DAWN-P1

pendant luminaires

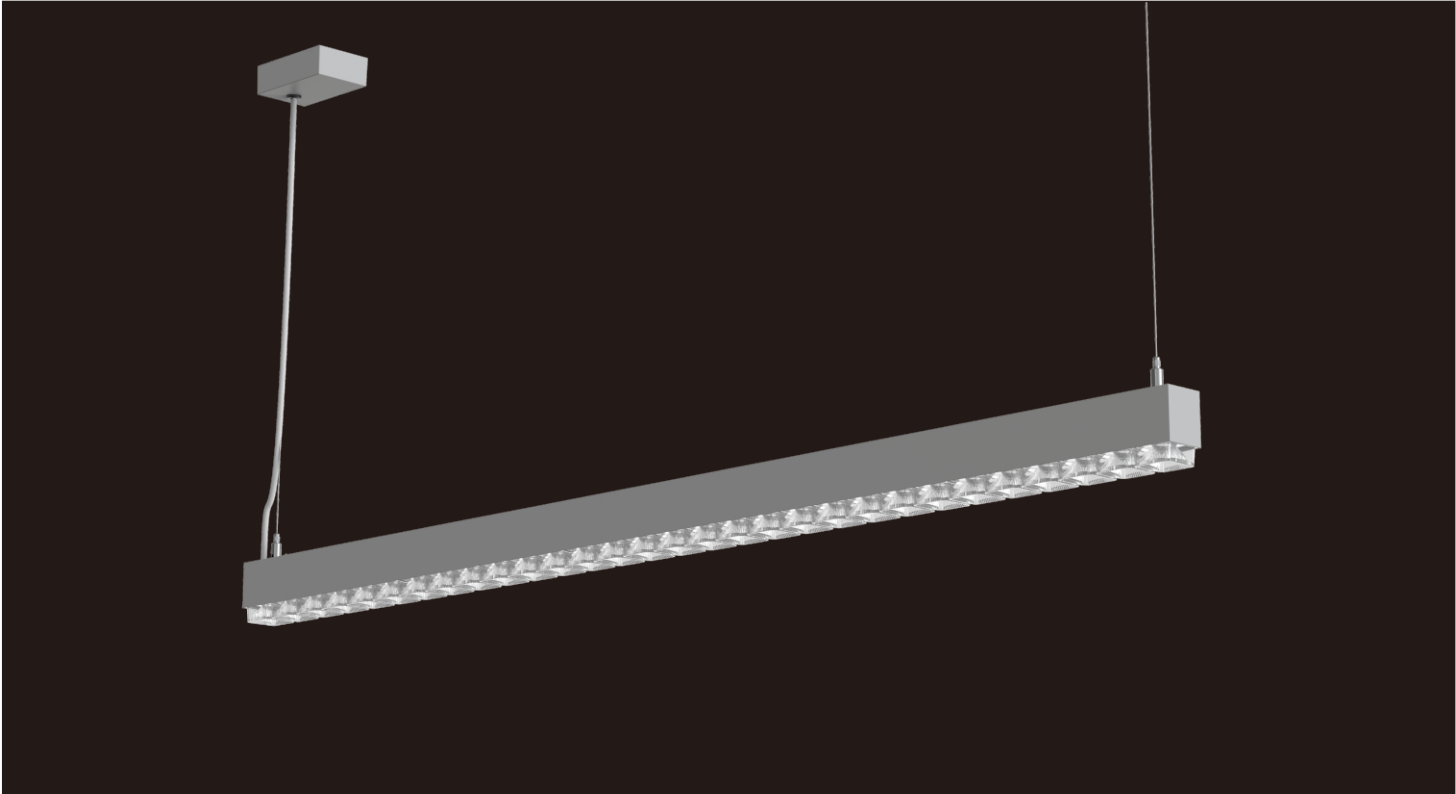

The most distinctive feature of the Dawn series lies in its optical module, which consists of optical lense in micro-structured and transparent anti-glare cover. When the lamp is lit, the side will be slightly bright, which can not only ensure the anti-glare effect of the lamp, but also provide a crystal clear sense of sight, providing a comfortable visual experience for the entire space. The light efficiency is up to 160lm/w, and the lighting is flicker-free. The lamp supports DALI dimming and 3000K/4000K dialable . Linkable design. The main materials including aluminum profiles and PC.

Features



- Simple and rich textured design
- Light efficiency up to 160lm/W
- 70° wider beam angle, Provide a better uniformity of spatial illuminance
More suitable for office applications
- Anti glare lens solution with side micro-light, low glare and high visual comfort
- UGR < 17, compliant with professional lighting design requirements
- 4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;
- Linkable design provide a clean, simple link
- 5 years warranty

Application Areas

Open-plan office, Individual office, small meeting room, reception, etc.




Technical data

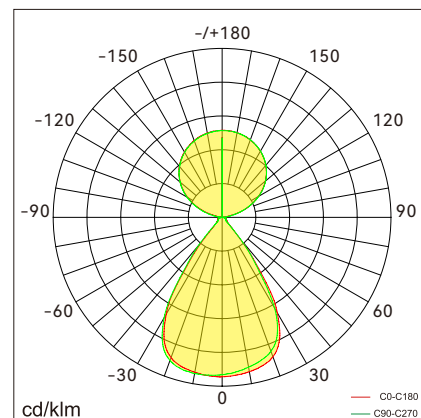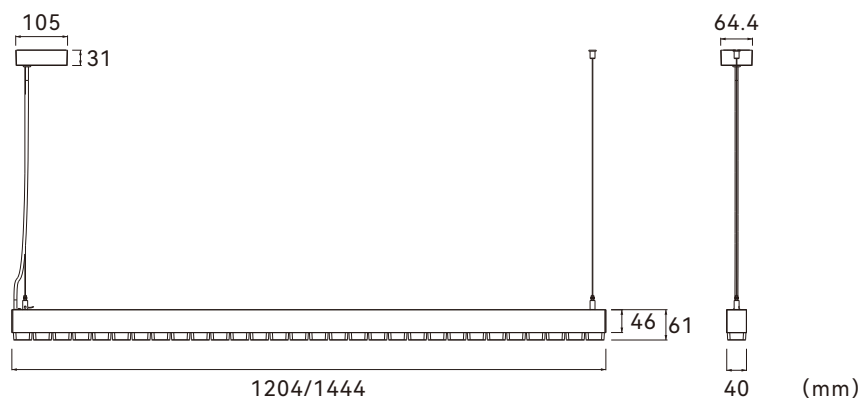

Item No.	BDAP1-1206024-NN	BDAP1-1206024-DN	BDAP1-1507028-NN	BDAP1-1507028-DN
Input Power(±10%)	60W(↑ 36W/24W ↓)		70W(↑ 42W/28W ↓)	
Input Voltage	AC200~240V			
Power Factor	≥0.9			
Luminous Flux(±10%)	9600lm(↑ 5450lm/4150lm ↓)		10700lm(↑ 6000lm/4700lm ↓)	
UGR	<17			
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	↑ 115°/70° ↓			
CCT(±200K)	3000/4000K(CCT switchable)			
Colour consistency SDCM	<3			
Dimming	NO	DALI dimming	NO	DALI dimming
Sensor	NO			
Housing Color	Silver / White / Black			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+40°C			
Net Weight	2.3kg			
Package size	1295*153*133mm			
20GP	1150 Pcs			
40GP	2450 Pcs			

Packaging

DAWN-P1 1.2m

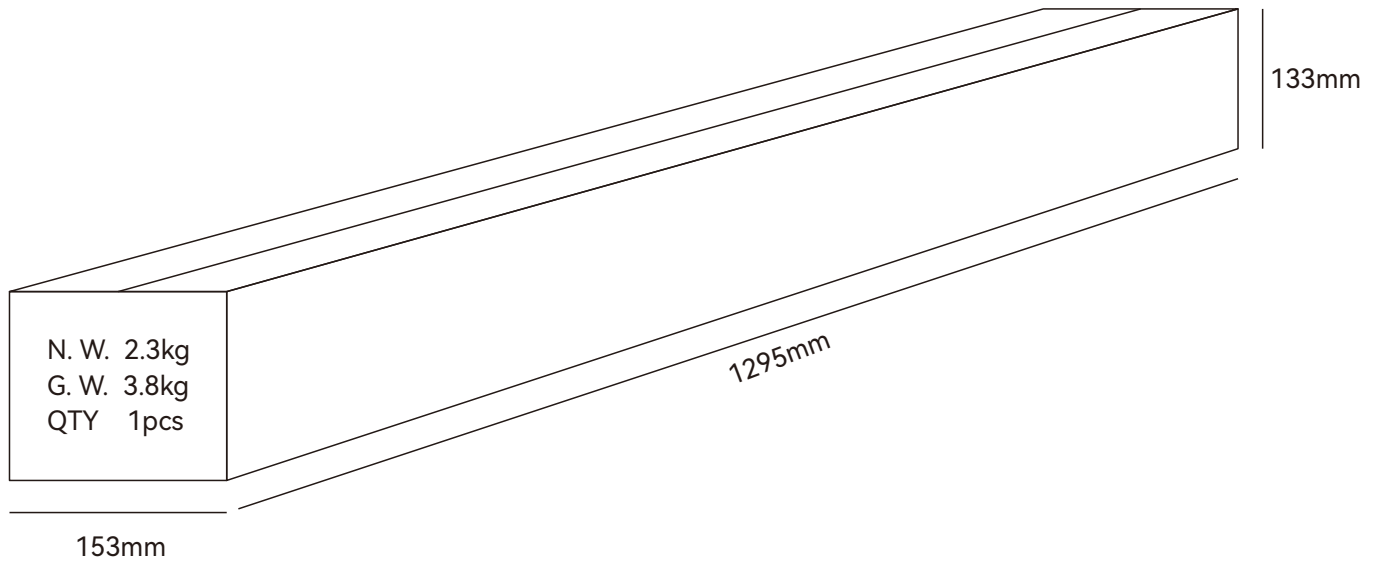

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

