


LUMINAIRE PHOTOMETRIC TEST REPORT


| | | |
|--|-----------------------|------------------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | |
| NAME: | TYPE: | WEIGHT: |
| SPEC.: | DIM.: 900*31 | SERIAL No.: |
| MFR.: NLD25-0017 | SUR.:3.14*0.448*0.448 | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 104.49 lm/W | | | |
|------------------|---------|-----------------------------------|--------|------------------------|----------|
| MODEL | | Imax(cd) | 2828 | S/MH(C0/180) | 1.29 |
| NOMINAL POWER(W) | 80 | LOR(%) | 100.0 | S/MH(C90/270) | 1.34 |
| RATED VOLTAGE(V) | 230.0 | TOTAL FLUX(lm) | 7758.2 | η UP,DN(C0-180) | 0.0,50.3 |
| NOMINAL FLUX(lm) | 7758.21 | CIE CLASS | DIRECT | η UP,DN(C180-360) | 0.0,49.7 |
| LAMPS INSIDE | 1 | η up(%) | 0.0 | CIBSE SHR NOM | 1.50 |
| TEST VOLTAGE(V) | 230.0 | η down(%) | 100.0 | CIBSE SHR MAX | 1.50 |

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

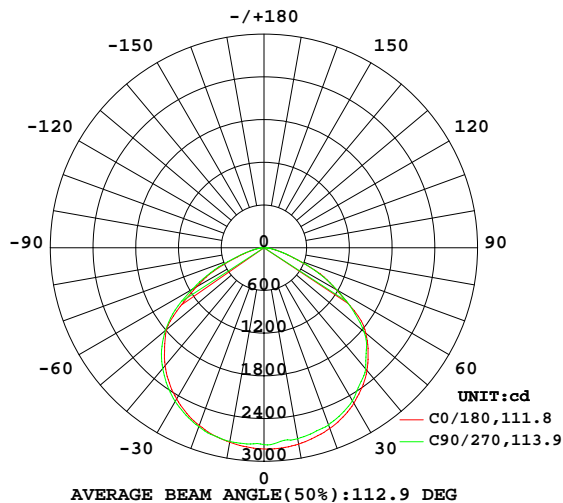

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

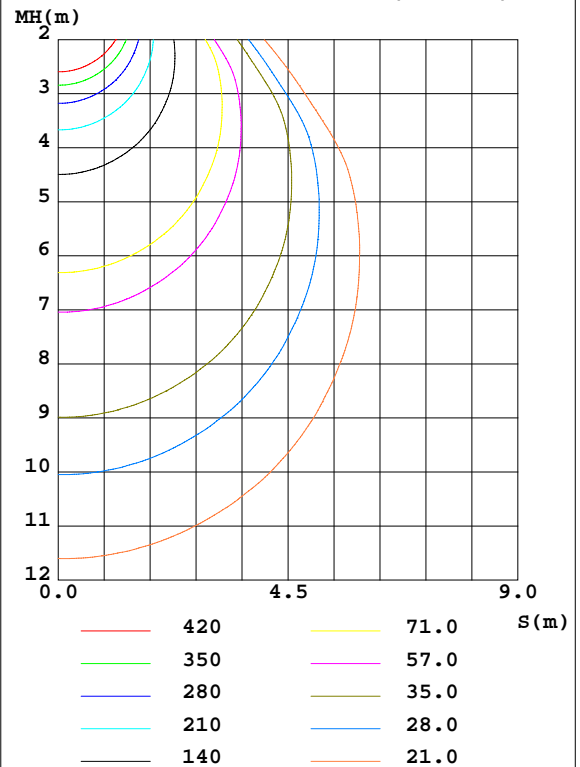

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | $\%lum, lamp$ |
|----------|-----------------------|-------|-------|-------|-------|-------|-------|-------|----------|-------------|--------------|---------------|
| 10 | 2800 | 2793 | 2722 | 2770 | 2774 | 2782 | 2762 | 2790 | 0- 10 | 266.8 | 266.8 | 3.44,3.44 |
| 20 | 2700 | 2692 | 2649 | 2651 | 2655 | 2668 | 2676 | 2687 | 10- 20 | 772.5 | 1039 | 13.4,13.4 |
| 30 | 2523 | 2516 | 2482 | 2443 | 2452 | 2477 | 2494 | 2508 | 20- 30 | 1193 | 2233 | 28.8,28.8 |
| 40 | 2251 | 2241 | 2223 | 2168 | 2160 | 2186 | 2213 | 2234 | 30- 40 | 1473 | 3706 | 47.8,47.8 |
| 50 | 1868 | 1854 | 1833 | 1793 | 1788 | 1763 | 1807 | 1843 | 40- 50 | 1561 | 5267 | 67.9,67.9 |
| 60 | 1167 | 1156 | 1179 | 1090 | 1092 | 1104 | 1154 | 1154 | 50- 60 | 1333 | 6600 | 85.1,85.1 |
| 70 | 497.8 | 496.6 | 513.8 | 428.0 | 441.4 | 446.8 | 474.2 | 494.6 | 60- 70 | 802.7 | 7402 | 95.4,95.4 |
| 80 | 140.7 | 130.6 | 145.4 | 105.8 | 116.6 | 111.3 | 129.8 | 134.8 | 70- 80 | 286.5 | 7689 | 99.1,99.1 |
| 90 | 8.007 | 6.675 | 10.84 | 10.15 | 9.966 | 9.828 | 12.32 | 12.53 | 80- 90 | 69.50 | 7758 | 100,100 |
| 100 | | | | | | | | | 90-100 | | | |
| 110 | | | | | | | | | 100-110 | | | |
| 120 | | | | | | | | | 110-120 | | | |
| 130 | | | | | | | | | 120-130 | | | |
| 140 | | | | | | | | | 130-140 | | | |
| 150 | | | | | | | | | 140-150 | | | |
| 160 | | | | | | | | | 150-160 | | | |
| 170 | | | | | | | | | 160-170 | | | |
| 180 | | | | | | | | | 170-180 | | | |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

| | | |
|--|-----------------------|------------------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | |
| NAME: | TYPE: | WEIGHT: |
| SPEC.: | DIM.: 900*31 | SERIAL No.: |
| MFR.: NLD25-0017 | SUR.:3.14*0.448*0.448 | Shielding Angle: |

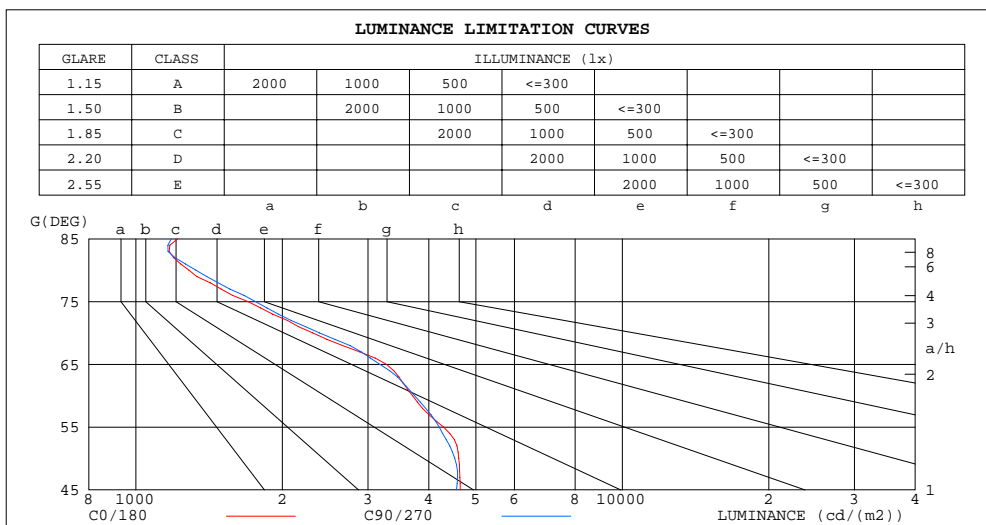

| LUMINANCE cd/(m2) | | |
|-------------------|--------|---------|
| G(DEG) | C0/180 | C90/270 |
| 85 | 1219 | 1182 |
| 80 | 1286 | 1328 |
| 75 | 1700 | 1762 |
| 70 | 2309 | 2384 |
| 65 | 3273 | 3174 |
| 60 | 3703 | 3741 |
| 55 | 4290 | 4202 |
| 50 | 4611 | 4524 |
| 45 | 4642 | 4563 |


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

| | | |
|--|-----------------------|------------------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | |
| NAME: | TYPE: | WEIGHT: |
| SPEC.: | DIM.: 900*31 | SERIAL No.: |
| MFR.: NLD25-0017 | SUR.:3.14*0.448*0.448 | Shielding Angle: |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|---------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | Coefficients of Utilization(CU) | | | | | | | | | | | | |
| 0.0 | 1.19 | 1.19 | 1.19 | 1.16 | 1.16 | 1.16 | 1.11 | 1.11 | 1.11 | 1.06 | 1.06 | 1.06 | 1.02 | 1.02 | 1.02 | 1.00 |
| 1.0 | 1.05 | 1.02 | .98 | 1.03 | .90 | .96 | .99 | .96 | .93 | .95 | .93 | .91 | .92 | .90 | .88 | .86 |
| 2.0 | .93 | .86 | .81 | .91 | .85 | .80 | .87 | .82 | .78 | .84 | .80 | .76 | .81 | .78 | .75 | .73 |
| 3.0 | .82 | .74 | .68 | .80 | .73 | .67 | .77 | .71 | .66 | .75 | .69 | .65 | .72 | .68 | .64 | .62 |
| 4.0 | .73 | .64 | .58 | .71 | .64 | .57 | .69 | .62 | .57 | .67 | .61 | .56 | .64 | .59 | .55 | .53 |
| 5.0 | .65 | .56 | .50 | .64 | .56 | .50 | .62 | .55 | .49 | .60 | .54 | .49 | .58 | .53 | .48 | .46 |
| 6.0 | .59 | .50 | .44 | .58 | .49 | .43 | .56 | .48 | .43 | .54 | .48 | .43 | .53 | .47 | .42 | .40 |
| 7.0 | .53 | .44 | .38 | .52 | .44 | .38 | .51 | .43 | .38 | .49 | .43 | .38 | .48 | .42 | .38 | .36 |
| 8.0 | .48 | .40 | .34 | .48 | .40 | .34 | .46 | .39 | .34 | .45 | .39 | .34 | .44 | .38 | .34 | .32 |
| 9.0 | .44 | .36 | .31 | .44 | .36 | .31 | .43 | .36 | .31 | .42 | .35 | .30 | .41 | .35 | .30 | .28 |
| 10.0 | .41 | .33 | .28 | .40 | .33 | .28 | .39 | .32 | .28 | .38 | .32 | .28 | .38 | .32 | .27 | .26 |

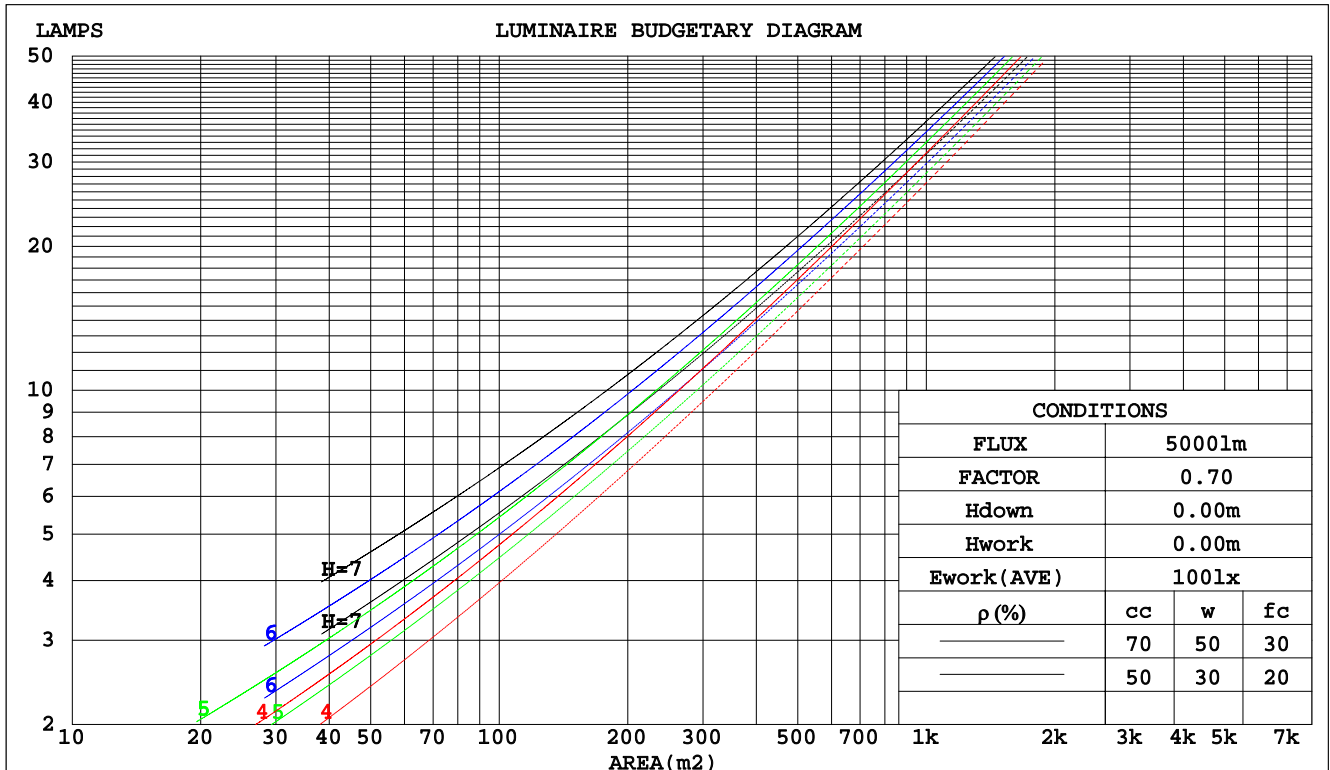

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

WEC AND CCEC

| | | | | | | | | |
|--|--|--|-----------------------|--|--|------------------|--|--|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | | | | | | | |
| NAME: | | | TYPE: | | | WEIGHT: | | |
| SPEC.: | | | DIM.: 900*31 | | | SERIAL No.: | | |
| MFR.: NLD25-0017 | | | SUR.:3.14*0.448*0.448 | | | Shielding Angle: | | |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Wall Exitance Coefficients(WEC) | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .279 | .159 | .050 | .272 | .155 | .049 | .259 | .149 | .047 | .247 | .143 | .046 | .236 | .137 | .044 | |
| 2.0 | .270 | .148 | .045 | .263 | .145 | .045 | .252 | .140 | .044 | .241 | .135 | .042 | .232 | .131 | .041 | |
| 3.0 | .254 | .135 | .040 | .248 | .133 | .040 | .238 | .129 | .039 | .229 | .125 | .038 | .220 | .122 | .038 | |
| 4.0 | .237 | .123 | .036 | .233 | .122 | .036 | .224 | .119 | .035 | .215 | .116 | .035 | .207 | .113 | .034 | |
| 5.0 | .221 | .113 | .033 | .217 | .112 | .032 | .209 | .109 | .032 | .202 | .106 | .032 | .195 | .104 | .031 | |
| 6.0 | .207 | .104 | .030 | .203 | .103 | .030 | .196 | .100 | .029 | .189 | .098 | .029 | .183 | .096 | .029 | |
| 7.0 | .194 | .096 | .027 | .190 | .095 | .027 | .184 | .093 | .027 | .178 | .091 | .027 | .172 | .090 | .026 | |
| 8.0 | .182 | .089 | .025 | .179 | .088 | .025 | .173 | .086 | .025 | .167 | .085 | .024 | .162 | .083 | .024 | |
| 9.0 | .171 | .083 | .023 | .168 | .082 | .023 | .163 | .081 | .023 | .158 | .079 | .023 | .153 | .078 | .023 | |
| 10.0 | .161 | .077 | .021 | .159 | .077 | .021 | .154 | .075 | .021 | .150 | .074 | .021 | .145 | .073 | .021 | |

| pcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|-----------------------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|---|
| pw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| pfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Ceiling Cavity Exitance Coefficients(CCEC) | | | | | | | | | |
| 0.0 | .190 | .190 | .190 | .163 | .163 | .163 | .111 | .111 | .111 | .064 | .064 | .064 | .020 | .020 | .020 | |
| 1.0 | .178 | .156 | .137 | .152 | .134 | .118 | .104 | .092 | .081 | .060 | .053 | .047 | .019 | .017 | .015 | |
| 2.0 | .169 | .132 | .101 | .145 | .114 | .087 | .099 | .079 | .061 | .057 | .046 | .036 | .018 | .015 | .012 | |
| 3.0 | .161 | .114 | .077 | .138 | .099 | .066 | .095 | .068 | .047 | .055 | .040 | .027 | .018 | .013 | .009 | |
| 4.0 | .154 | .101 | .060 | .132 | .087 | .052 | .091 | .061 | .037 | .053 | .036 | .022 | .017 | .012 | .007 | |
| 5.0 | .147 | .090 | .048 | .126 | .078 | .042 | .087 | .055 | .030 | .050 | .032 | .018 | .016 | .010 | .006 | |
| 6.0 | .140 | .082 | .040 | .120 | .071 | .035 | .083 | .050 | .025 | .048 | .029 | .015 | .016 | .010 | .005 | |
| 7.0 | .133 | .075 | .034 | .115 | .065 | .030 | .079 | .046 | .021 | .046 | .027 | .012 | .015 | .009 | .004 | |
| 8.0 | .127 | .069 | .029 | .110 | .060 | .025 | .076 | .042 | .018 | .044 | .025 | .011 | .014 | .008 | .004 | |
| 9.0 | .121 | .064 | .026 | .105 | .056 | .022 | .072 | .039 | .016 | .042 | .023 | .009 | .014 | .008 | .003 | |
| 10.0 | .116 | .060 | .023 | .100 | .052 | .020 | .069 | .037 | .014 | .040 | .022 | .008 | .013 | .007 | .003 | |

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
 Humidity:65.0%
 Test Distance:11.700m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

| | | | | | | | | | | | |
|--|-----|------------------|------|------|-----------------------|------|----------------|------------------|------|------|------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | | | | | | | | | | |
| NAME: | | | | | TYPE: | | | WEIGHT: | | | |
| SPEC.: | | | | | DIM.: 900*31 | | | SERIAL No.: | | | |
| MFR.: NLD25-0017 | | | | | SUR.:3.14*0.448*0.448 | | | Shielding Angle: | | | |
| ceiling/cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Room dimensions | | Viewed crosswise | | | | | Viewed endwise | | | | |
| x = 2H y = 2H | | 18.0 | 19.5 | 18.3 | 19.7 | 19.9 | 17.9 | 19.4 | 18.2 | 19.6 | 19.8 |
| | 3H | 18.8 | 20.2 | 19.1 | 20.4 | 20.7 | 18.8 | 20.1 | 19.1 | 20.4 | 20.6 |
| | 4H | 19.0 | 20.3 | 19.3 | 20.5 | 20.8 | 19.0 | 20.2 | 19.3 | 20.5 | 20.7 |
| | 6H | 19.0 | 20.2 | 19.4 | 20.5 | 20.8 | 19.0 | 20.2 | 19.4 | 20.5 | 20.8 |
| | 8H | 19.0 | 20.2 | 19.4 | 20.5 | 20.8 | 19.0 | 20.2 | 19.4 | 20.5 | 20.8 |
| | 12H | 19.0 | 20.1 | 19.4 | 20.4 | 20.7 | 19.0 | 20.1 | 19.4 | 20.4 | 20.7 |
| 4H | 2H | 18.4 | 19.7 | 18.7 | 20.0 | 20.2 | 18.4 | 19.7 | 18.7 | 19.9 | 20.2 |
| | 3H | 19.3 | 20.5 | 19.7 | 20.7 | 21.0 | 19.3 | 20.4 | 19.7 | 20.7 | 21.0 |
| | 4H | 19.6 | 20.6 | 19.9 | 20.9 | 21.2 | 19.6 | 20.6 | 19.9 | 20.9 | 21.2 |
| | 6H | 19.7 | 20.6 | 20.1 | 20.9 | 21.3 | 19.7 | 20.6 | 20.1 | 20.9 | 21.3 |
| | 8H | 19.7 | 20.5 | 20.1 | 20.9 | 21.3 | 19.7 | 20.5 | 20.1 | 20.9 | 21.3 |
| | 12H | 19.7 | 20.5 | 20.2 | 20.9 | 21.3 | 19.7 | 20.5 | 20.2 | 20.9 | 21.3 |
| 8H | 4H | 19.6 | 20.4 | 20.0 | 20.8 | 21.2 | 19.6 | 20.4 | 20.0 | 20.8 | 21.2 |
| | 6H | 19.8 | 20.5 | 20.2 | 20.9 | 21.3 | 19.8 | 20.5 | 20.2 | 20.9 | 21.3 |
| | 8H | 19.9 | 20.5 | 20.3 | 20.9 | 21.3 | 19.9 | 20.5 | 20.3 | 20.9 | 21.3 |
| | 12H | 19.9 | 20.4 | 20.4 | 20.9 | 21.4 | 19.9 | 20.4 | 20.4 | 20.9 | 21.4 |
| 12H | 4H | 19.6 | 20.3 | 20.0 | 20.7 | 21.1 | 19.6 | 20.3 | 20.0 | 20.7 | 21.1 |
| | 6H | 19.8 | 20.4 | 20.2 | 20.8 | 21.3 | 19.8 | 20.4 | 20.2 | 20.8 | 21.3 |
| | 8H | 19.9 | 20.4 | 20.3 | 20.8 | 21.3 | 19.9 | 20.4 | 20.3 | 20.8 | 21.3 |
| Variations with the observer position at spacings: | | | | | | | | | | | |
| S = 1.0H | | + 0.3 / - 0.4 | | | | | + 0.3 / - 0.4 | | | | |
| 1.5H | | + 0.3 / - 0.6 | | | | | + 0.3 / - 0.6 | | | | |
| 2.0H | | + 0.7 / - 0.6 | | | | | + 0.6 / - 0.5 | | | | |

CIE Pub.117, 7758 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.1$)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
 Humidity:65.0%
 Test Distance:11.700m [K=1.0000]
 Remarks:


```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

| | | |
|--|-----------------------|------------------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | |
| NAME: | TYPE: | WEIGHT: |
| SPEC.: | DIM.: 900*31 | SERIAL No.: |
| MFR.: NLD25-0017 | SUR.:3.14*0.448*0.448 | Shielding Angle: |

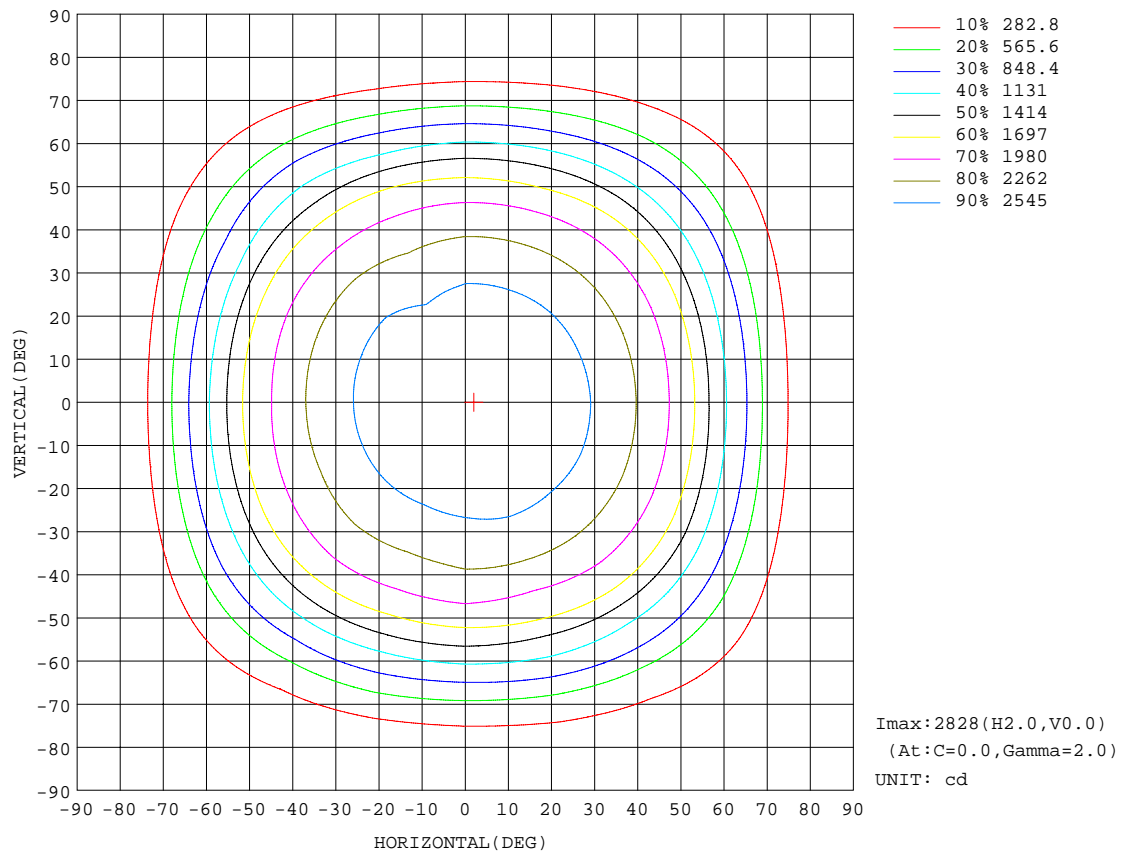


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

AAI CURVES

| | | |
|--|-----------------------|------------------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | |
| NAME: | TYPE: | WEIGHT: |
| SPEC.: | DIM.: 900*31 | SERIAL No.: |
| MFR.: NLD25-0017 | SUR.:3.14*0.448*0.448 | Shielding Angle: |

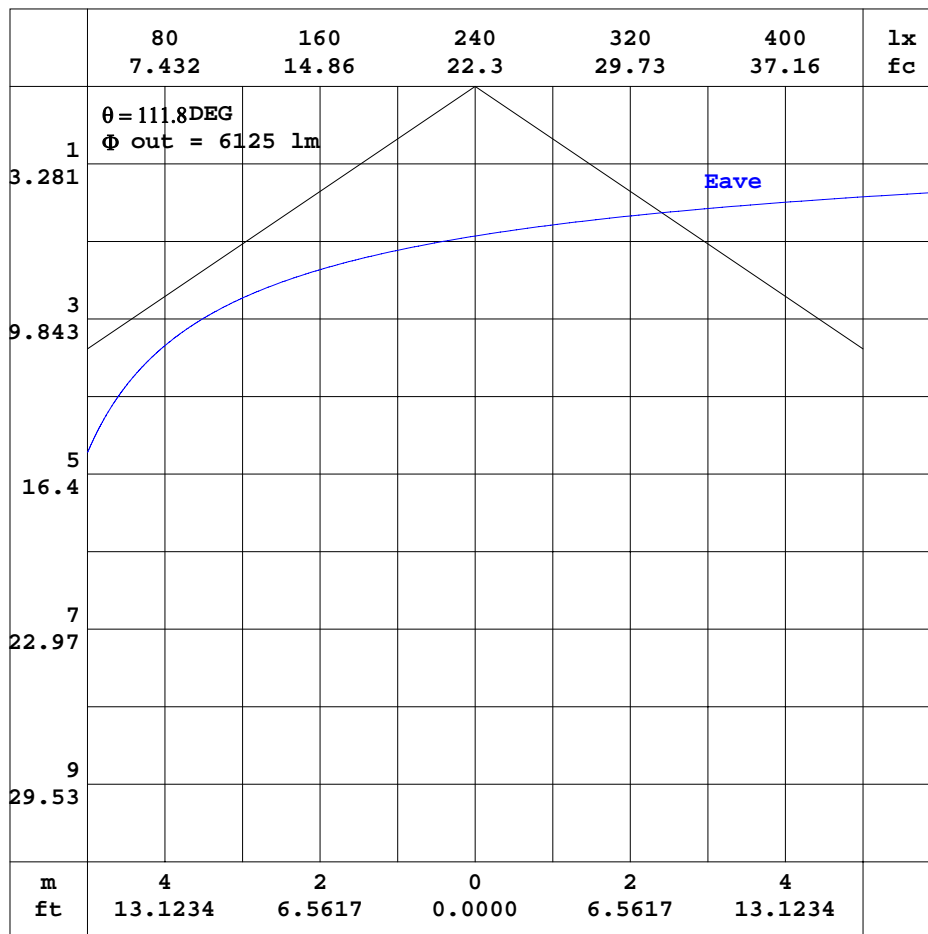


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

| | | |
|--|-----------------------|------------------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | |
| NAME: | TYPE: | WEIGHT: |
| SPEC.: | DIM.: 900*31 | SERIAL No.: |
| MFR.: NLD25-0017 | SUR.:3.14*0.448*0.448 | Shielding Angle: |

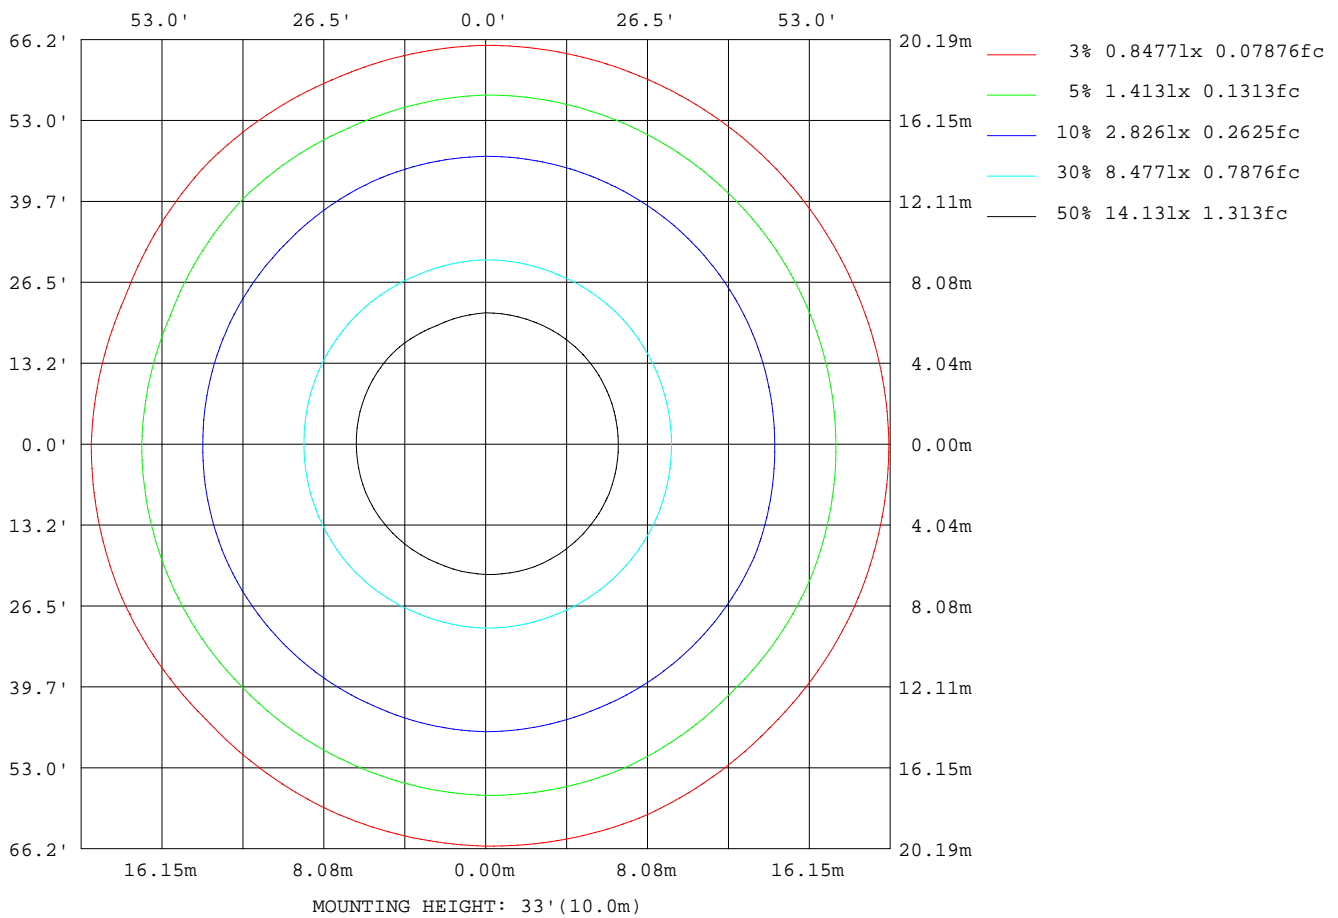

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

LED Avg.L Report

| | | |
|--|-----------------------|------------------|
| Test:U:229.67V I:0.3322A P:74.246W PF:0.9730 Freq:49.99Hz Lamp Flux:7758.21x1 lm | | |
| NAME: | TYPE: | WEIGHT: |
| SPEC.: | DIM.: 900*31 | SERIAL No.: |
| MFR.: NLD25-0017 | SUR.:3.14*0.448*0.448 | Shielding Angle: |


| AvgL | cd/m2 |
|----------------|-------|
| L_0~180(65)av | 3114 |
| L_0~180(75)av | 1583 |
| L_0~180(85)av | 1150 |
| L_90~270(65)av | 3129 |
| L_90~270(75)av | 1676 |
| L_90~270(85)av | 1153 |
| L_45(65)av | 3056 |
| L_45(75)av | 1506 |
| L_45(85)av | 1104 |

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

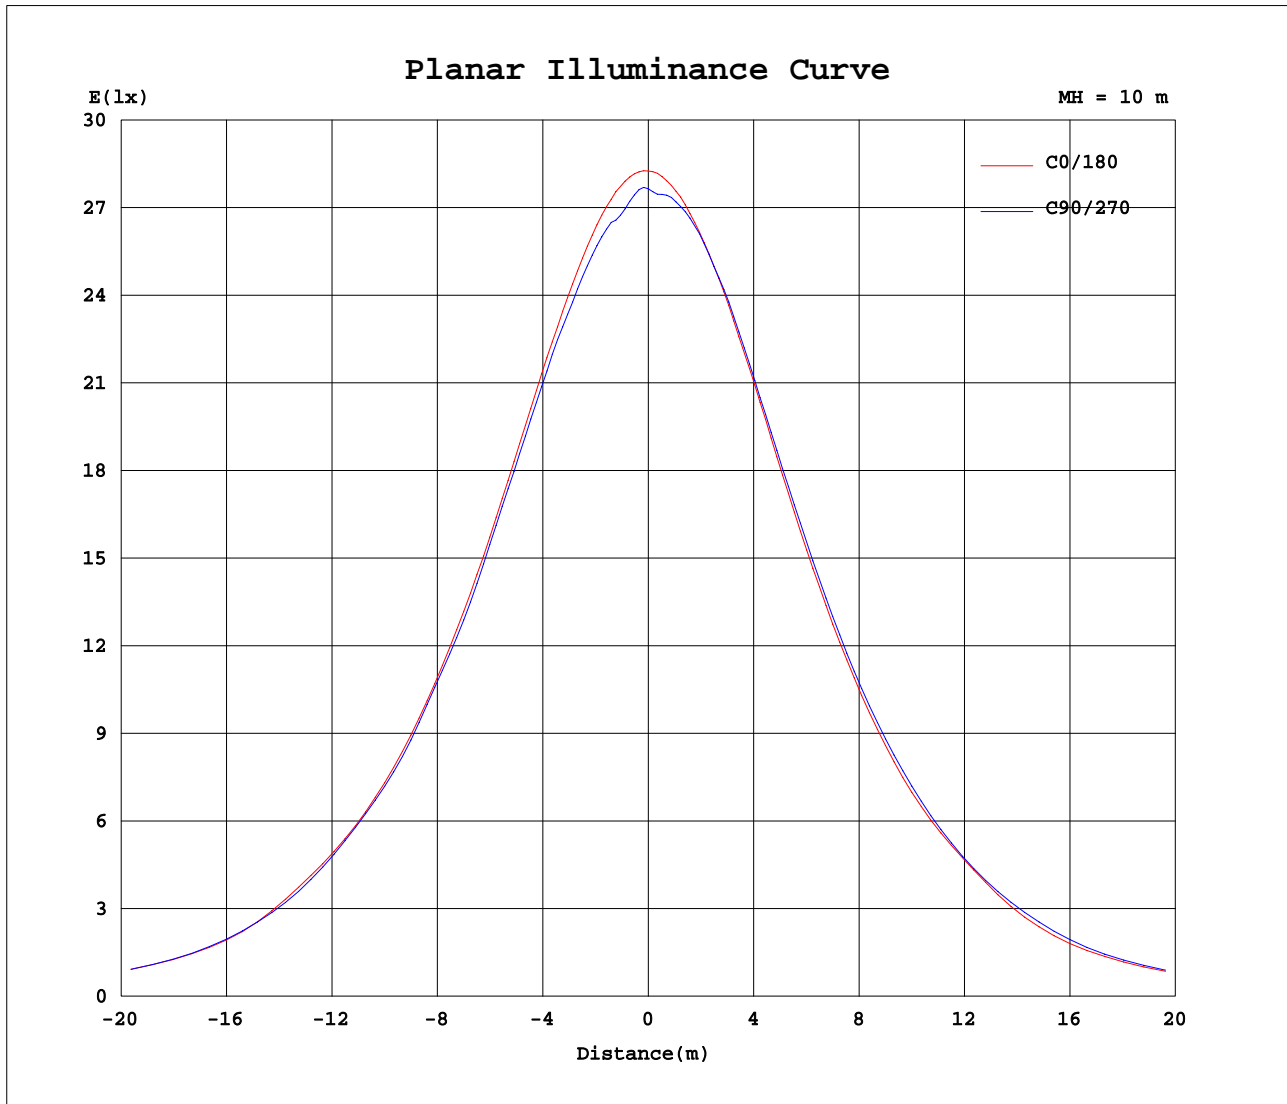

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

```