


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.46 lm/W			
MODEL		Imax(cd)	8715	S/MH(C0/180)	1.25
NOMINAL POWER(W)	176	LOR(%)	100.0	S/MH(C90/270)	1.32
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	25465	η UP,DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	25464.5	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230.0	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

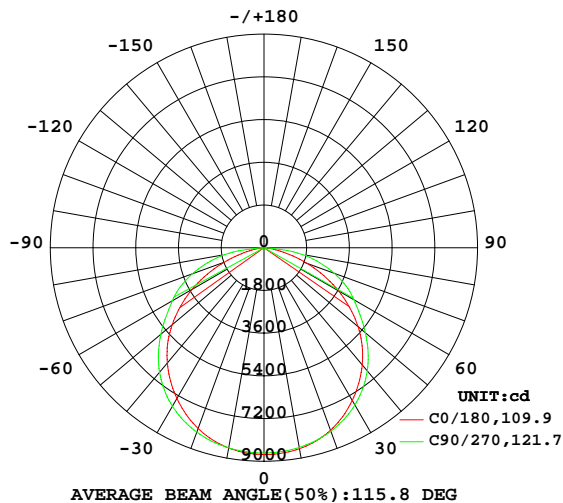

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

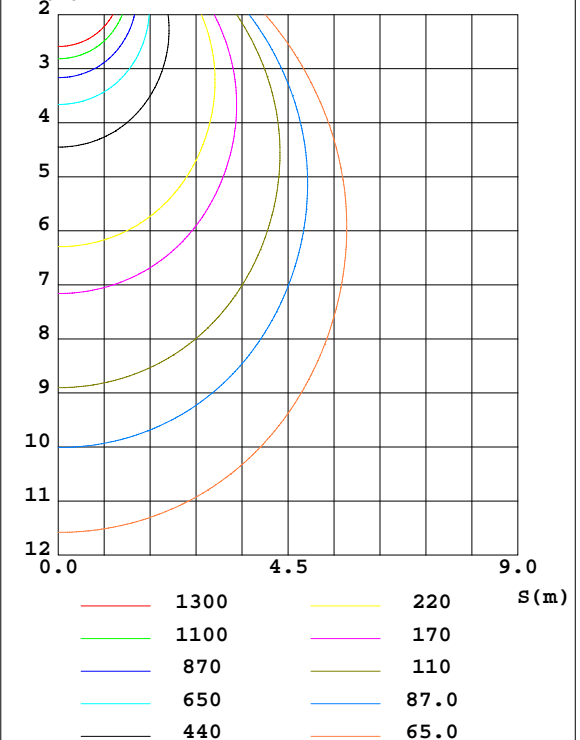

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	8598	8568	8544	8504	8566	8560	8562	8541	0- 10	821.5	821.5	3.23,3.23
20	8186	8221	8229	8113	8107	8196	8270	8202	10- 20	2373	3194	12.5,12.5
30	7436	7577	7655	7422	7336	7537	7715	7561	20- 30	3637	6831	26.8,26.8
40	6440	6603	6771	6425	6337	6563	6845	6588	30- 40	4430	11262	44.2,44.2
50	5176	5343	5578	5167	5051	5310	5673	5345	40- 50	4614	15876	62.3,62.3
60	3620	3884	4379	3689	3486	3818	4453	3856	50- 60	4126	20001	78.5,78.5
70	1927	2510	3150	2343	1774	2421	3209	2440	60- 70	3145	23146	90.9,90.9
80	507.9	1156	1637	1017	423.8	1059	1711	1107	70- 80	1848	24995	98.2,98.2
90	51.77	43.26	25.40	22.21	22.08	31.74	35.86	51.09	80- 90	469.8	25465	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

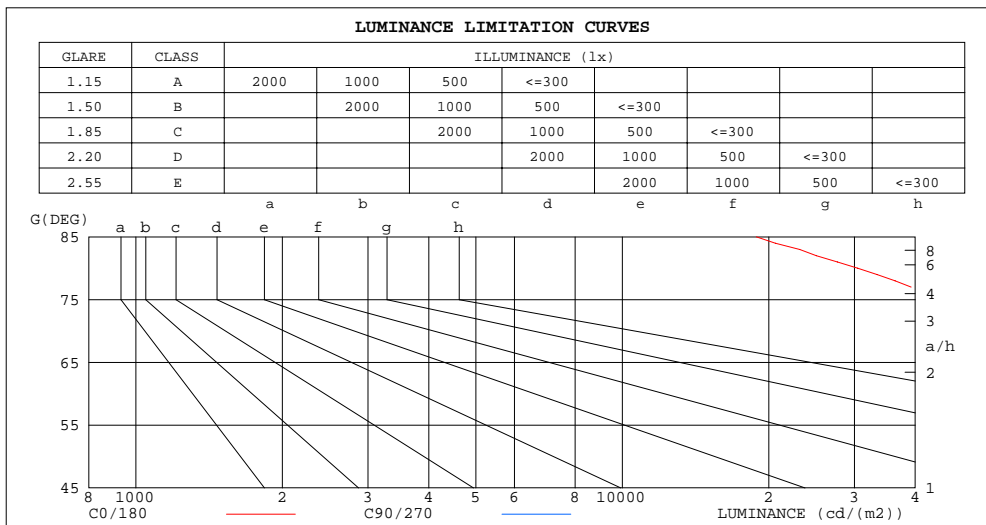

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	18862	39161
80	30469	98179
75	45168	97657
70	58683	95940
65	68585	94179
60	75426	91234
55	80230	89801
50	83879	90389
45	86199	91343


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.99	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.82	.77	.73	.79	.75	.72	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

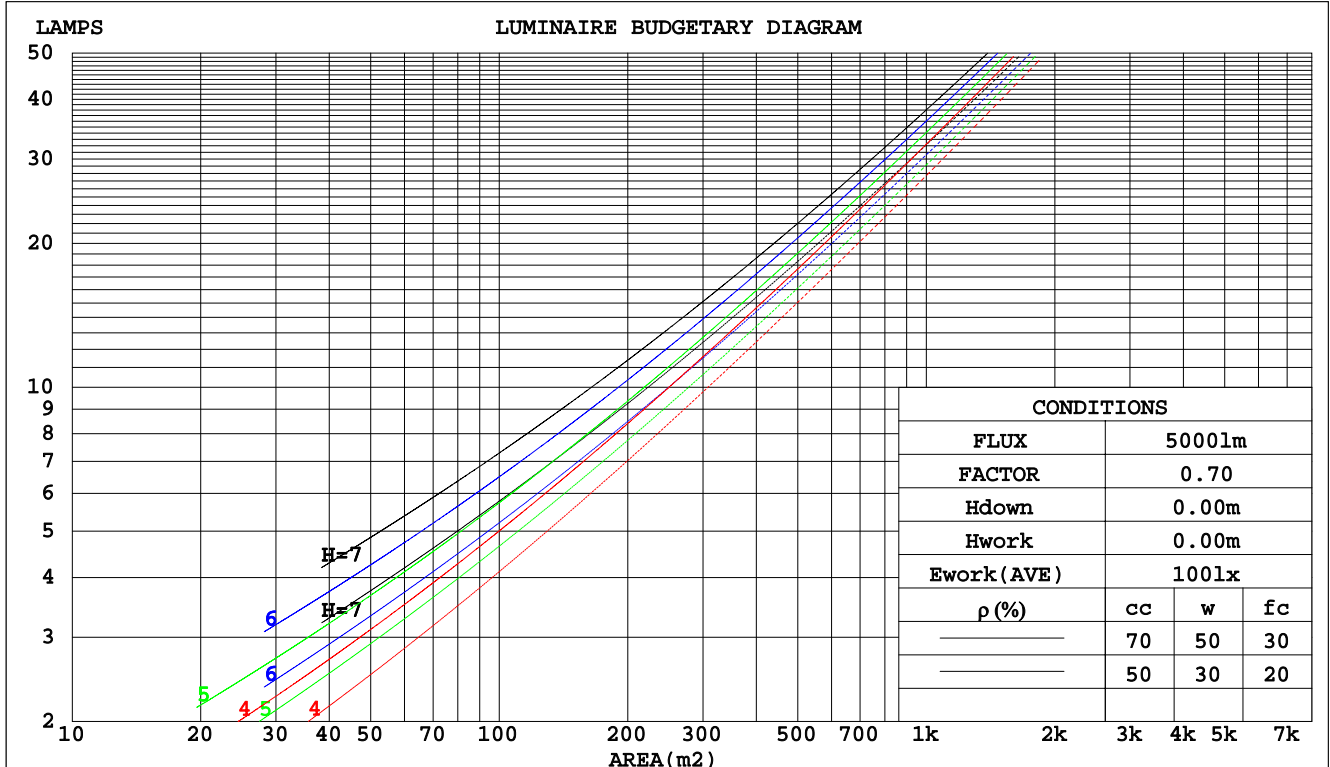

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.:			DIM.: 1282*160*28			SERIAL No.:		
MFR.:			SUR.:0.8*0.12			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.291	.167	.053	.279	.161	.052	.267	.155	.050	
2.0	.293	.161	.049	.287	.158	.049	.275	.153	.048	.264	.148	.046	.254	.144	.045	
3.0	.271	.144	.043	.266	.142	.043	.255	.138	.042	.246	.135	.041	.237	.131	.041	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.084	.024	.172	.084	.023	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.022	.148	.075	.021	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.046	.019	.017	.015		
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011		
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009		
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007		
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006		
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005		
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004		
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003		
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003		
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
 Humidity:65.0%
 Test Distance:11.700m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.: 1282*160*28			SERIAL No.:			
MFR.:					SUR.:0.8*0.12			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	2H	28.0	29.5	28.3	29.7	30.0	28.7	30.3	29.0	30.5	30.7
	3H	29.2	30.6	29.5	30.9	31.1	30.7	32.1	31.0	32.3	32.5
	4H	29.6	30.9	29.9	31.2	31.4	31.5	32.9	31.8	33.1	33.4
	6H	29.7	31.0	30.1	31.3	31.5	32.3	33.5	32.6	33.8	34.1
	8H	29.7	31.0	30.1	31.2	31.5	32.5	33.7	32.9	34.0	34.3
	12H	29.7	30.9	30.1	31.2	31.5	32.6	33.8	32.9	34.1	34.4
4H	2H	28.7	30.0	29.0	30.3	30.5	29.3	30.6	29.6	30.9	31.1
	3H	30.1	31.3	30.4	31.6	31.9	31.4	32.6	31.7	32.9	33.2
	4H	30.6	31.6	30.9	32.0	32.3	32.4	33.5	32.8	33.8	34.1
	6H	30.8	31.8	31.2	32.1	32.5	33.3	34.3	33.7	34.6	35.0
	8H	30.9	31.8	31.3	32.1	32.5	33.6	34.5	34.1	34.9	35.3
	12H	30.9	31.7	31.3	32.1	32.5	33.7	34.6	34.2	34.9	35.3
8H	4H	31.0	31.9	31.4	32.3	32.6	32.6	33.5	33.0	33.9	34.3
	6H	31.4	32.2	31.9	32.6	33.0	33.7	34.4	34.1	34.8	35.3
	8H	31.6	32.2	32.0	32.6	33.1	34.1	34.8	34.6	35.2	35.7
	12H	31.6	32.2	32.1	32.6	33.1	34.3	34.9	34.8	35.3	35.8
12H	4H	31.1	31.9	31.5	32.3	32.7	32.6	33.4	33.0	33.8	34.2
	6H	31.6	32.2	32.0	32.7	33.1	33.7	34.4	34.2	34.8	35.3
	8H	31.8	32.3	32.2	32.8	33.2	34.2	34.8	34.7	35.2	35.7
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.2					

CIE Pub.117, 25465 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 11.2$)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
 Humidity:65.0%
 Test Distance:11.700m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	65	54	48	41
1.00	76	65	57	75	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	57
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
 Humidity:65.0%
 Test Distance:11.700m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

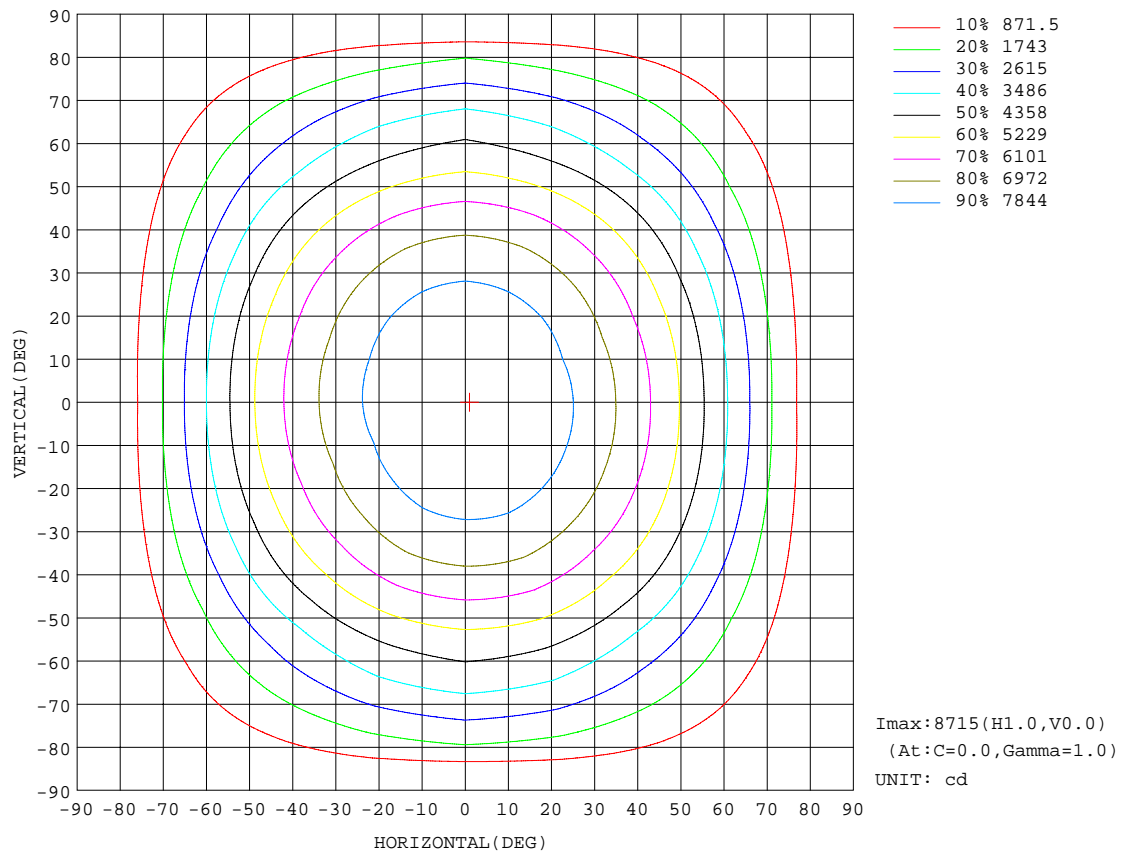


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

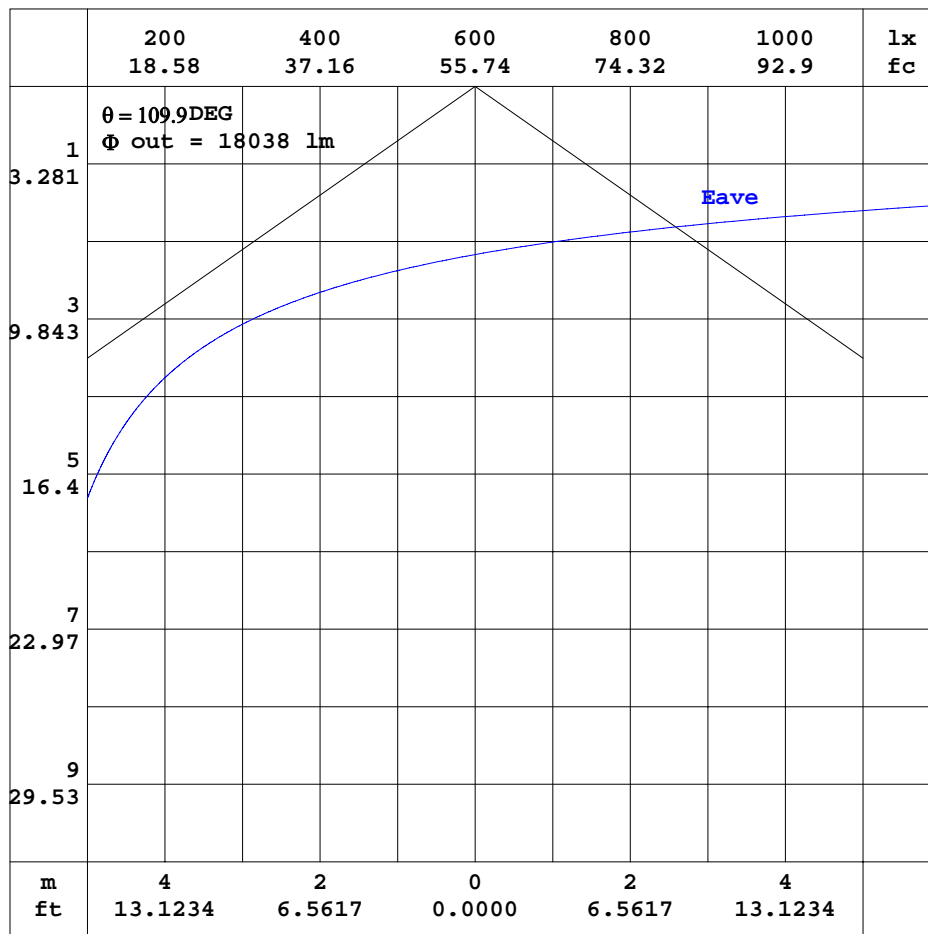


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

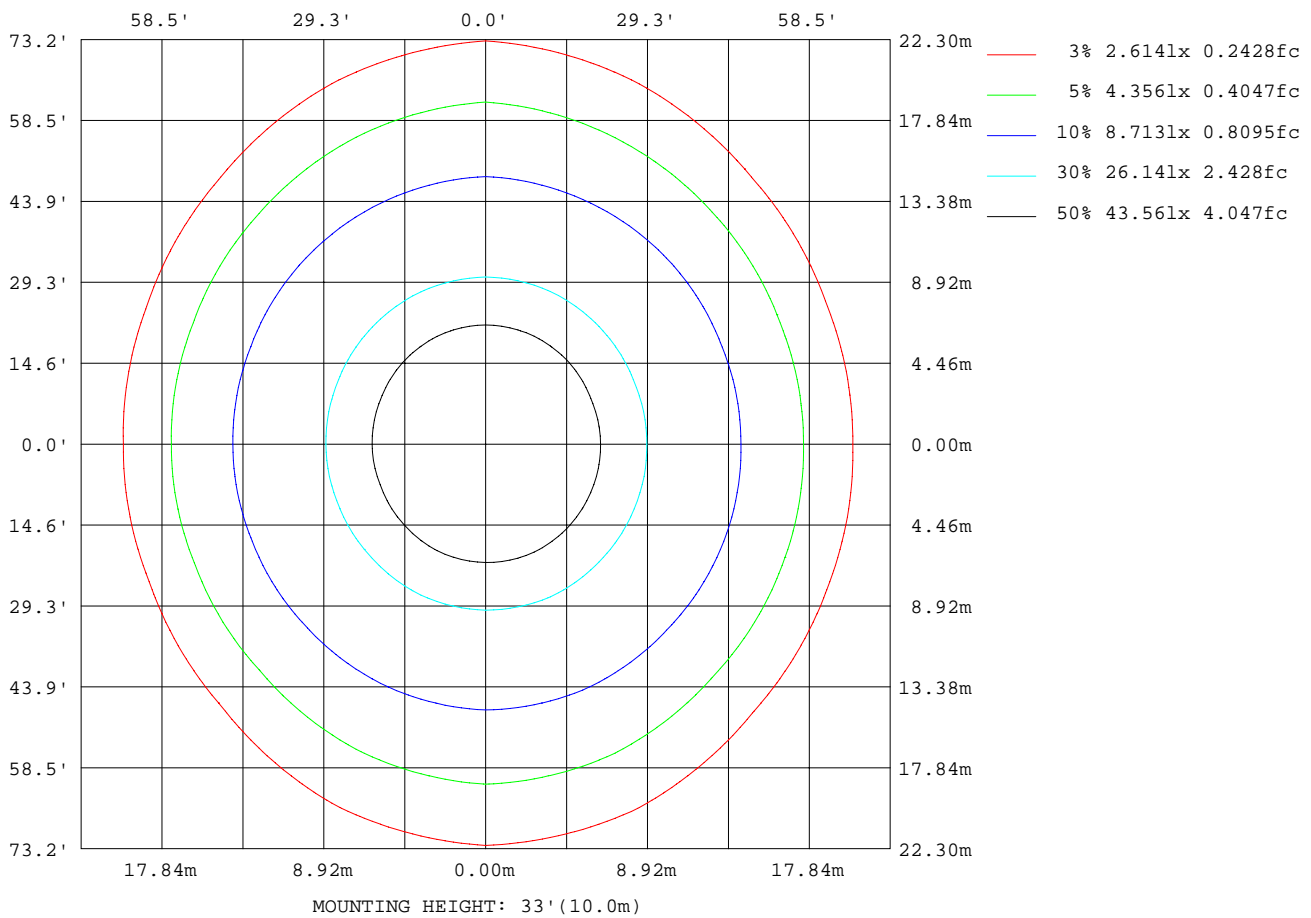

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:229.54V I:0.8549A P:193.70W PF:0.9871 Freq:49.99Hz Lamp Flux:25464.5x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	66769
L_0~180(75)av	42665
L_0~180(85)av	17020
L_90~270(65)av	94965
L_90~270(75)av	98388
L_90~270(85)av	42726
L_45(65)av	75796
L_45(75)av	70586
L_45(85)av	55385

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-06

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

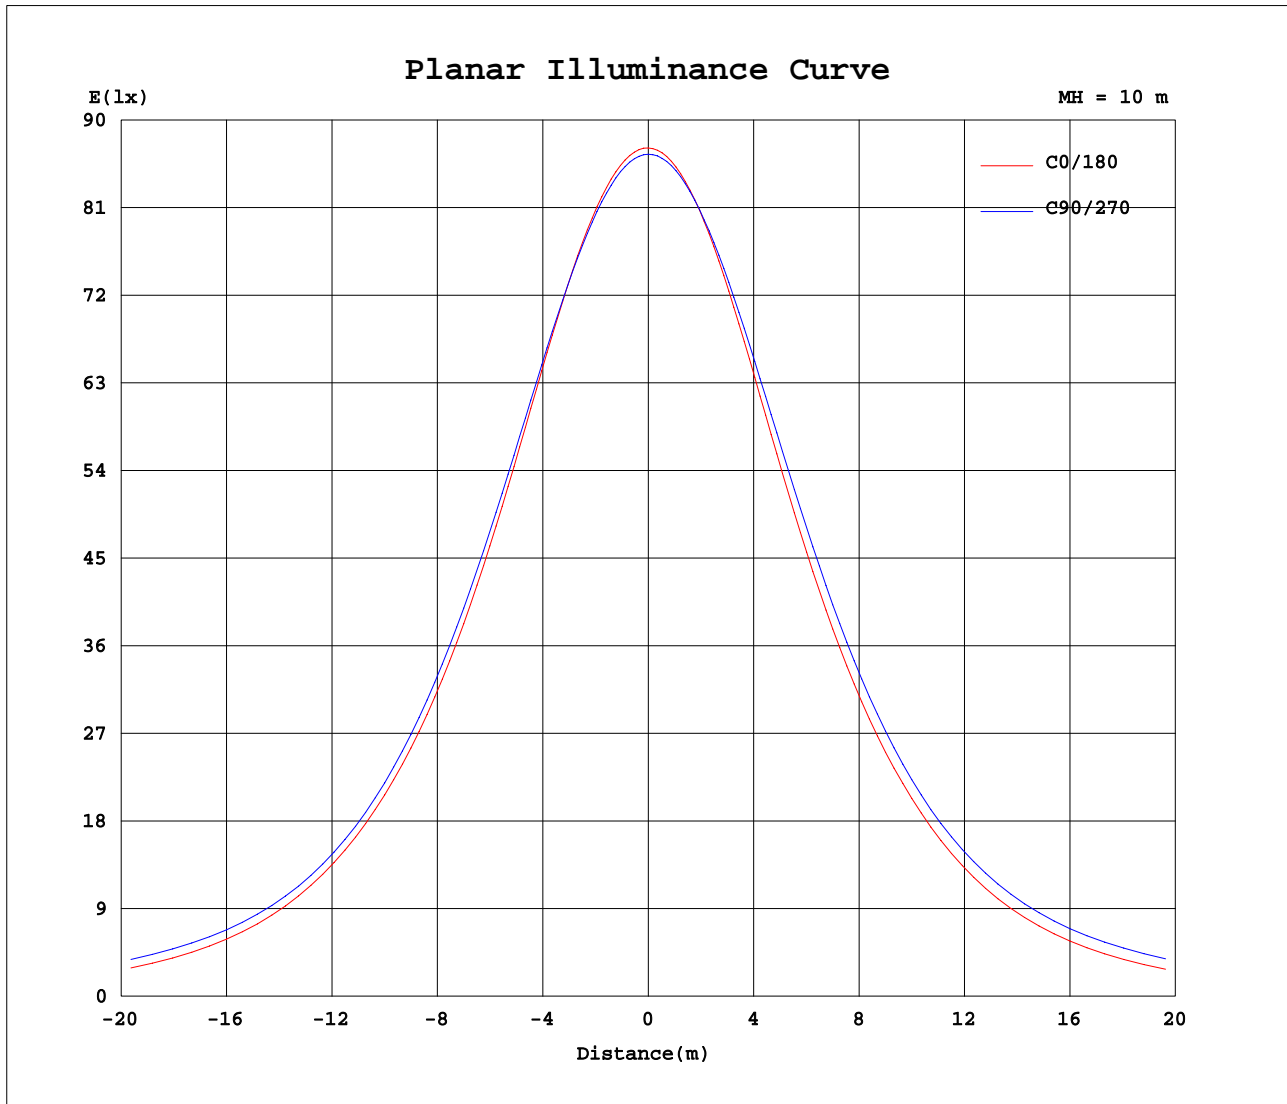

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-06

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

```