


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 123.71 lm/W			
MODEL		Imax(cd)	8235	S/MH(C0/180)	1.24
NOMINAL POWER(W)	136	LOR(%)	100.0	S/MH(C90/270)	1.31
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	23857	η UP,DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	23857	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230.0	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

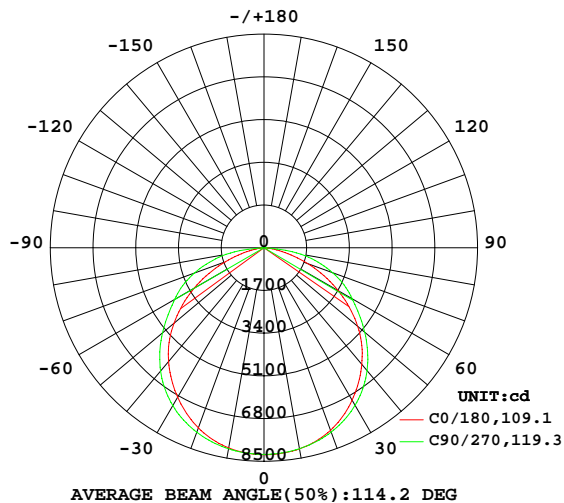

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

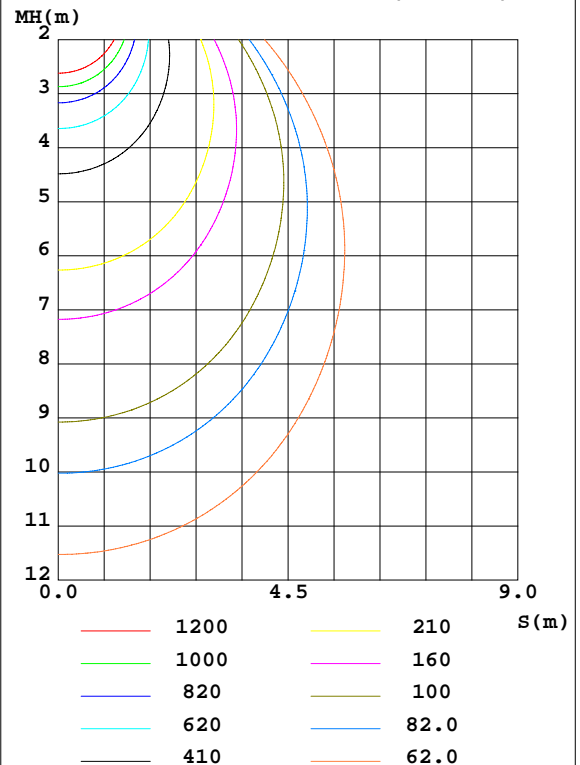

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	Φ lum, lamp
10	8127	8130	8122	8099	8088	8104	8125	8131	0- 10	780.1	780.1	3.27,3.27
20	7732	7790	7809	7713	7631	7730	7815	7789	10- 20	2250	3030	12.7,12.7
30	7009	7169	7243	7028	6869	7065	7256	7158	20- 30	3439	6469	27.1,27.1
40	6056	6225	6381	6048	5908	6101	6403	6206	30- 40	4171	10640	44.6,44.6
50	4870	5014	5234	4832	4678	4903	5271	5021	40- 50	4323	14963	62.7,62.7
60	3410	3625	4052	3406	3201	3510	4099	3632	50- 60	3845	18808	78.8,78.8
70	1853	2298	2905	2119	1641	2229	2950	2305	60- 70	2913	21720	91,91
80	522.6	1052	1496	914.6	403.3	968.0	1540	1044	70- 80	1710	23430	98.2,98.2
90	51.20	41.37	24.09	16.37	20.31	25.59	32.39	50.39	80- 90	426.9	23857	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

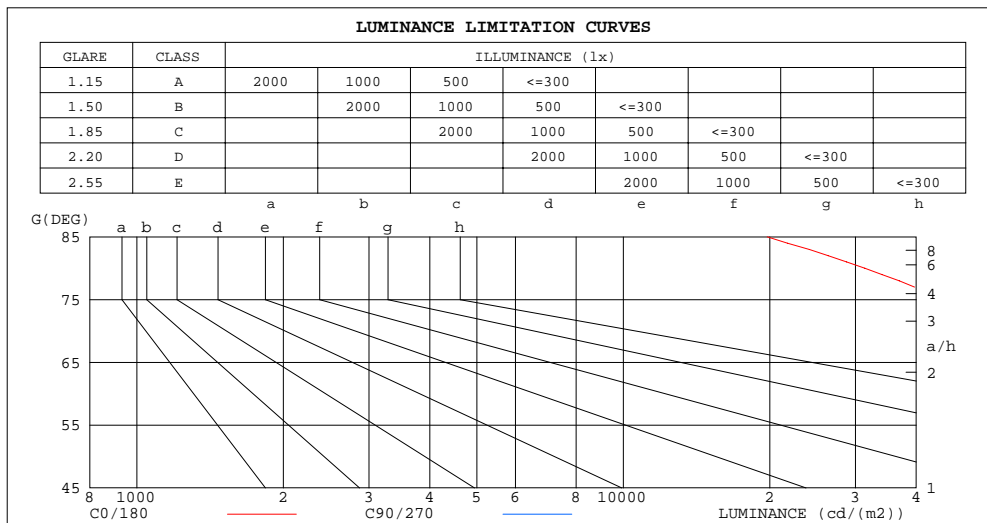

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	19768	37042
80	31349	89739
75	45014	89819
70	56430	88463
65	64884	86777
60	71034	84420
55	75421	83941
50	78915	84815
45	81103	85890


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.32	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

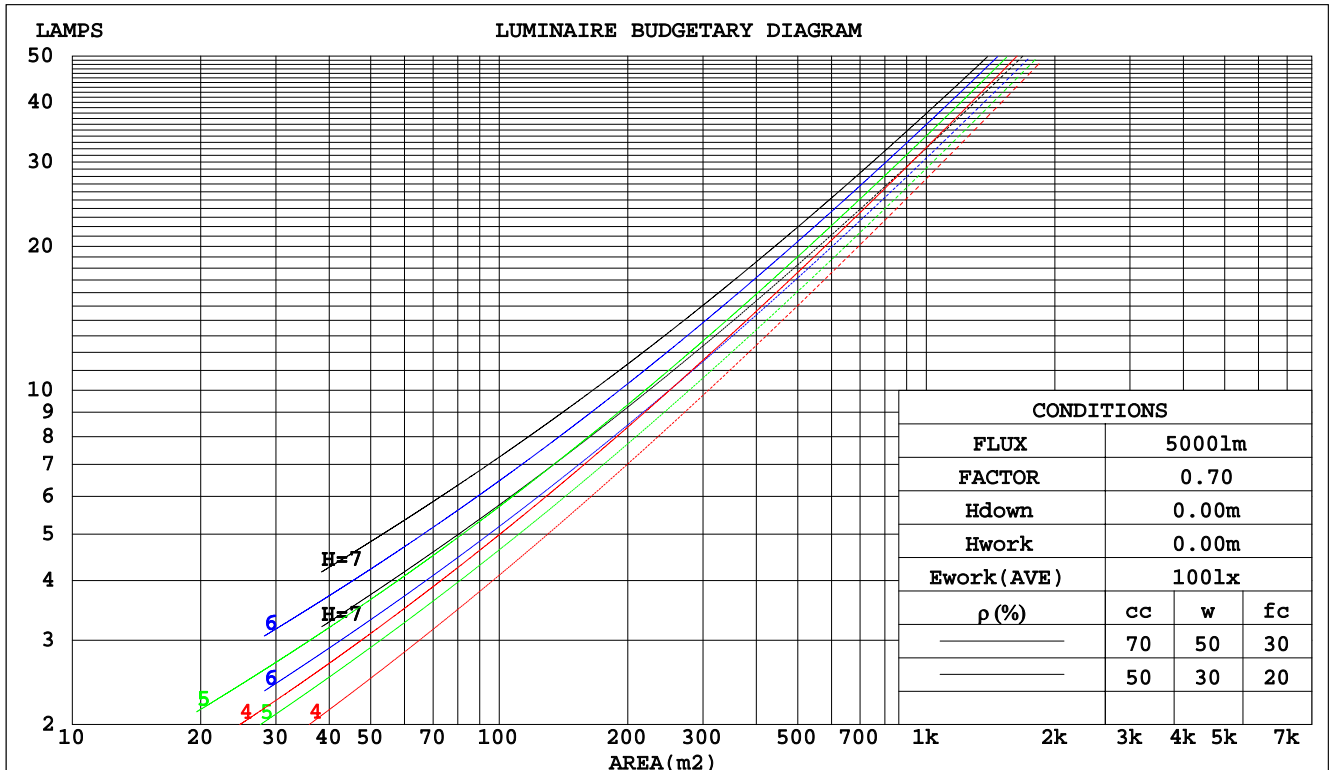

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.:			DIM.: 1282*160*28			SERIAL No.:		
MFR.:			SUR.:0.8*0.12			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.309	.176	.056	.302	.172	.055	.289	.166	.053	.277	.160	.051	.266	.154	.050		
2.0	.292	.160	.049	.285	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045		
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.236	.131	.040		
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036		
5.0	.230	.117	.034	.226	.116	.034	.218	.114	.033	.210	.111	.033	.203	.109	.033		
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030		
7.0	.199	.098	.028	.196	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027		
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.172	.087	.025	.166	.085	.025		
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023		
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.047	.019	.017	.015		
2.0	.172	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011		
3.0	.164	.114	.074	.141	.099	.064	.097	.068	.045	.056	.040	.027	.018	.013	.009		
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007		
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.017	.010	.006		
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005		
7.0	.135	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004		
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003		
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003		
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
 Humidity:65.0%
 Test Distance:11.700m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.: 1282*160*28			SERIAL No.:			
MFR.:					SUR.:0.8*0.12			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	27.8	29.4	28.1	29.6	29.8	28.5	30.0	28.7	30.2	30.4
	3H	29.1	30.5	29.3	30.7	30.9	30.4	31.8	30.7	32.0	32.2
	4H	29.4	30.8	29.7	31.0	31.3	31.2	32.5	31.5	32.8	33.1
	6H	29.6	30.9	29.9	31.1	31.4	31.9	33.2	32.3	33.5	33.7
	8H	29.6	30.9	30.0	31.1	31.4	32.2	33.4	32.5	33.7	34.0
	12H	29.6	30.8	30.0	31.1	31.4	32.2	33.4	32.6	33.7	34.0
4H	2H	28.5	29.8	28.8	30.1	30.3	29.0	30.3	29.3	30.6	30.8
	3H	29.9	31.1	30.2	31.4	31.7	31.1	32.2	31.4	32.5	32.8
	4H	30.4	31.5	30.8	31.8	32.1	32.1	33.1	32.4	33.5	33.8
	6H	30.7	31.6	31.1	32.0	32.4	32.9	33.9	33.3	34.2	34.6
	8H	30.7	31.6	31.2	32.0	32.4	33.3	34.2	33.7	34.5	34.9
	12H	30.8	31.6	31.2	32.0	32.4	33.3	34.2	33.8	34.5	35.0
8H	4H	30.8	31.7	31.2	32.0	32.4	32.3	33.2	32.7	33.5	33.9
	6H	31.2	32.0	31.7	32.4	32.8	33.3	34.1	33.8	34.5	34.9
	8H	31.4	32.0	31.8	32.5	32.9	33.7	34.4	34.2	34.8	35.3
	12H	31.5	32.0	31.9	32.5	32.9	33.9	34.4	34.4	34.9	35.4
12H	4H	30.9	31.7	31.3	32.1	32.5	32.3	33.1	32.7	33.5	33.9
	6H	31.4	32.0	31.8	32.4	32.9	33.3	34.0	33.8	34.4	34.9
	8H	31.6	32.1	32.0	32.6	33.0	33.8	34.4	34.3	34.8	35.3
Variations with the observer position at spacings:											
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.4					+ 0.1 / - 0.2					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.2					

CIE Pub.117, 23857 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 11.0$)

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
 Humidity:65.0%
 Test Distance:11.700m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	55	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

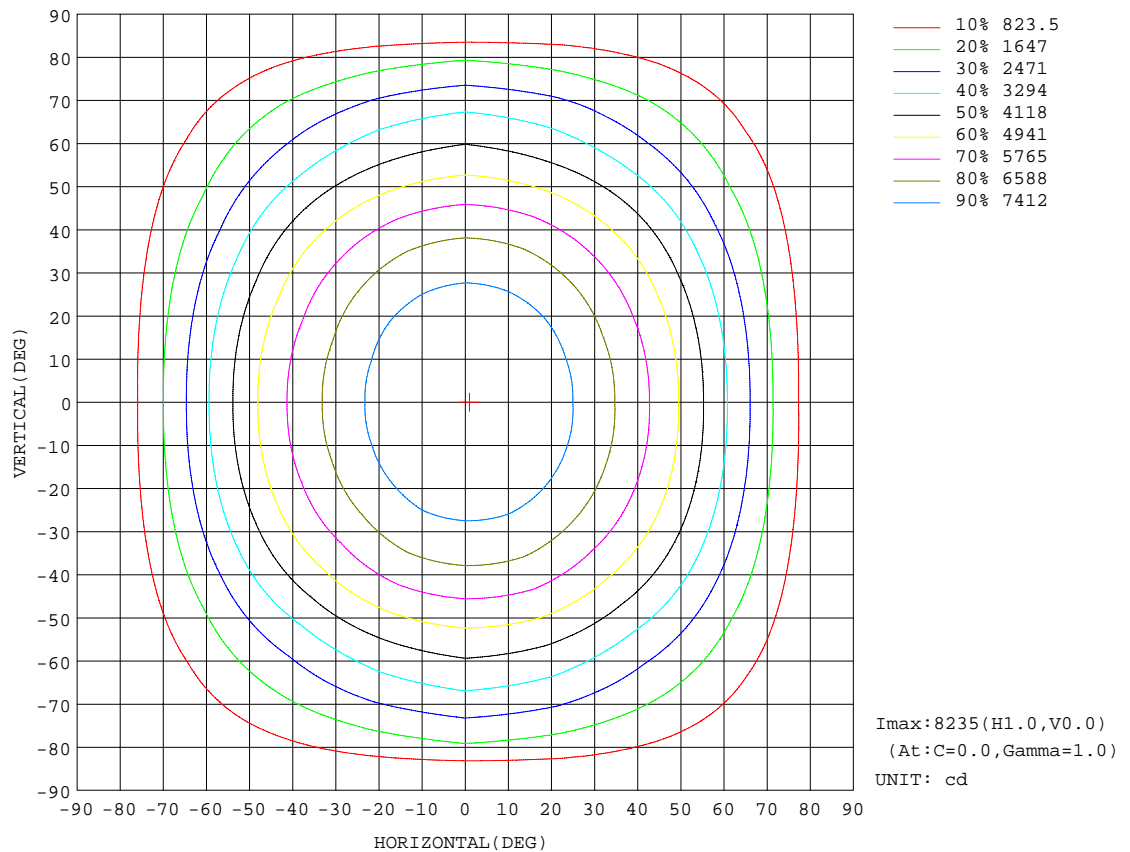


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

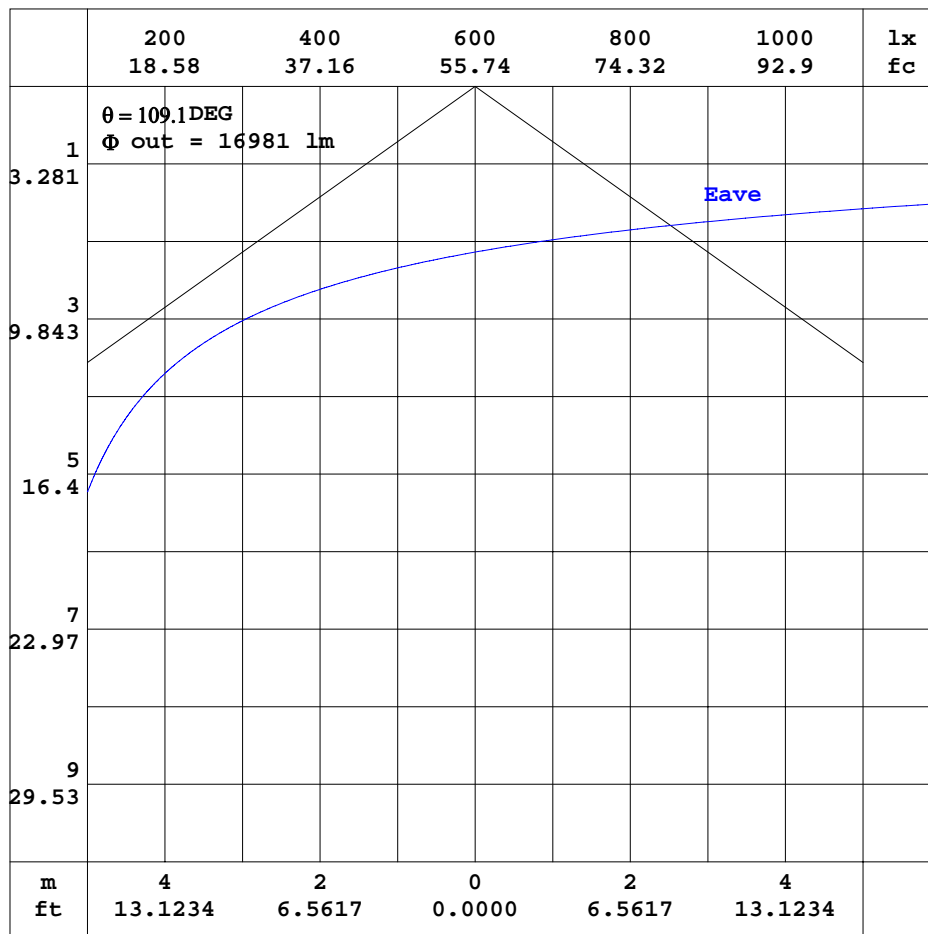


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:

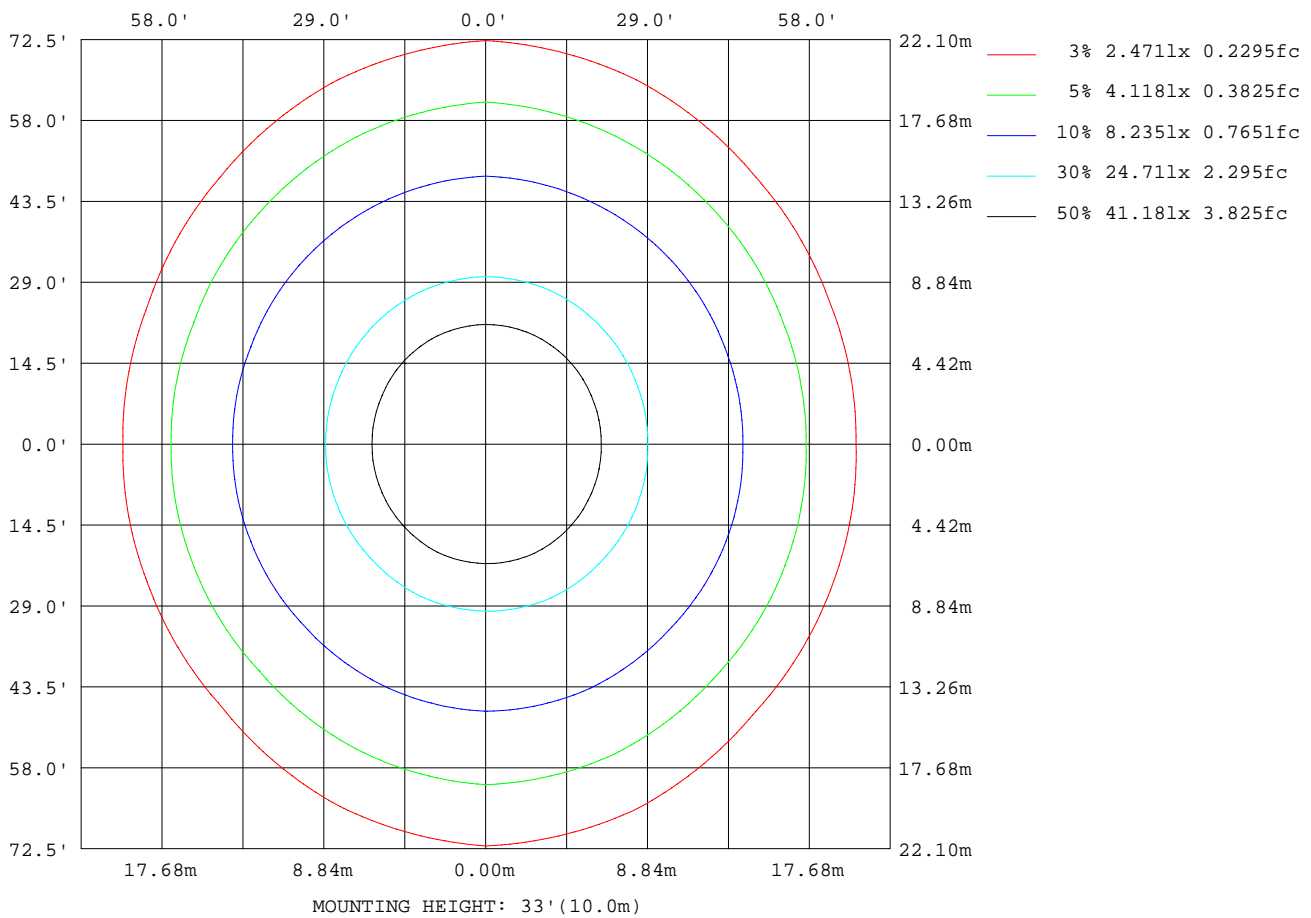

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:229.55V I:0.8511A P:192.85W PF:0.9871 Freq:49.99Hz Lamp Flux:23857x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 1282*160*28	SERIAL No.:
MFR.:	SUR.:0.8*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	62205
L_0~180(75)av	41415
L_0~180(85)av	16814
L_90~270(65)av	87395
L_90~270(75)av	90180
L_90~270(85)av	37987
L_45(65)av	70173
L_45(75)av	65165
L_45(85)av	49697

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2025-08-07

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

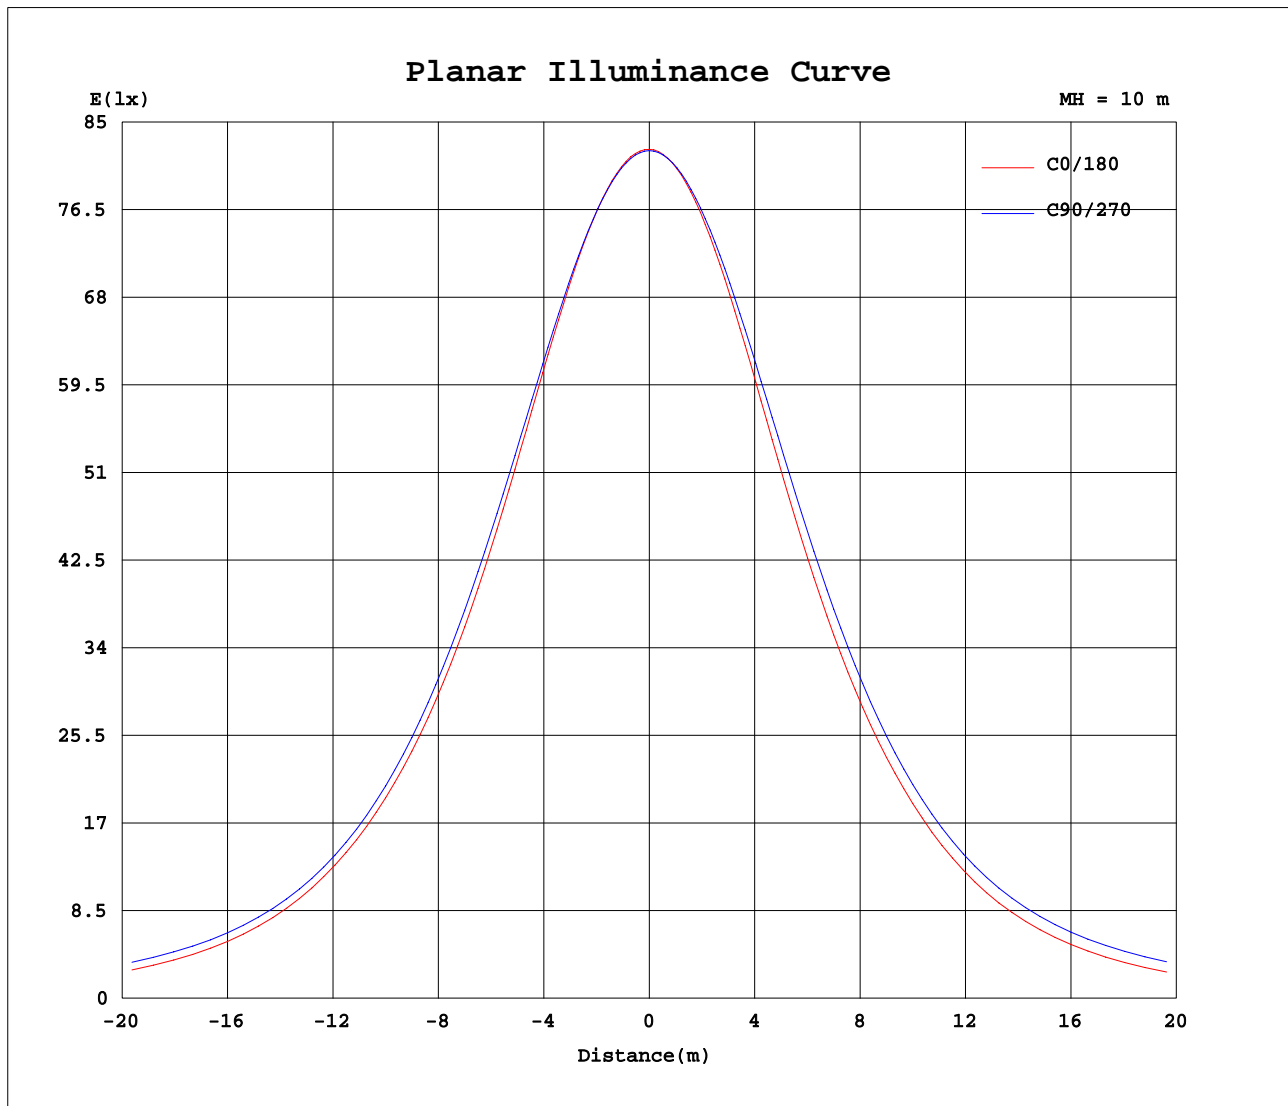

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2025-08-07

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity: 65.0%
Test Distance: 11.700m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

```