


POD wall mounted luminaire

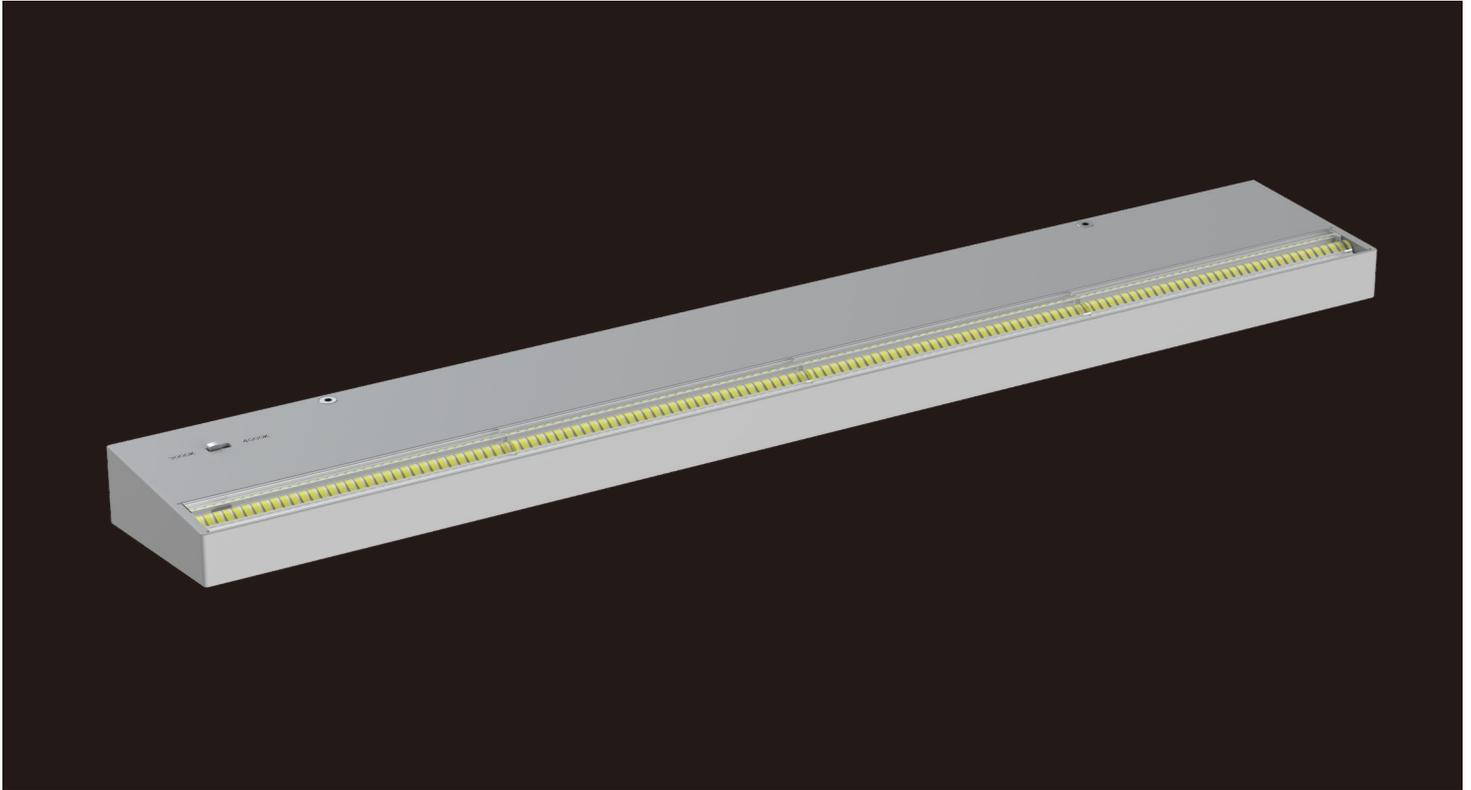

The modern minimalist design style, complemented by exquisite materials and perfect assembly details, gives the product a rich and sophisticated appearance. POD is a linear wall light with a unidirectional upward-facing design. Its lens optics utilize a 45° polarized design to better and evenly illuminate the ceiling, providing a more comfortable lighting experience for the space. It features a glare-free design, a typical luminous efficacy of 120 LM/W, and is flicker-free. It supports DALI dimming and adjustable color temperature via DIP switches. The main materials are aluminum profiles and PC material. POD is particularly suitable for spaces with clean ceilings, such as corridors, lounge areas, conference rooms, and office spaces.

Features

Compact and quality appearance, patent design with rich texture and visual impact

Light efficiency up to 120lm/W

Asymmetric optics

CCT switchable

Indirect light deliver a comfortable lighting for space

Impressive easy for installation and maintenance


Support DALI Dimming

SDCM < 3


5 years warranty

Application Areas

For open plan office, stairs, corridors, lobby, Break out area etc.

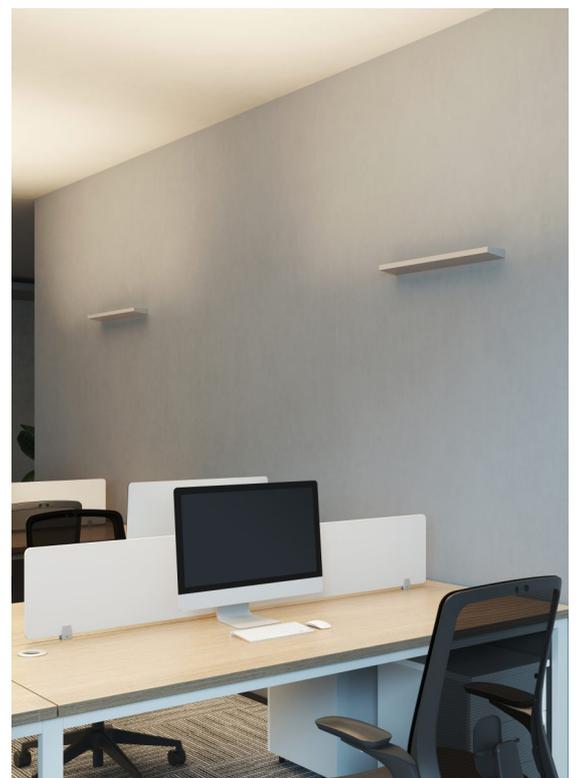


Technical data

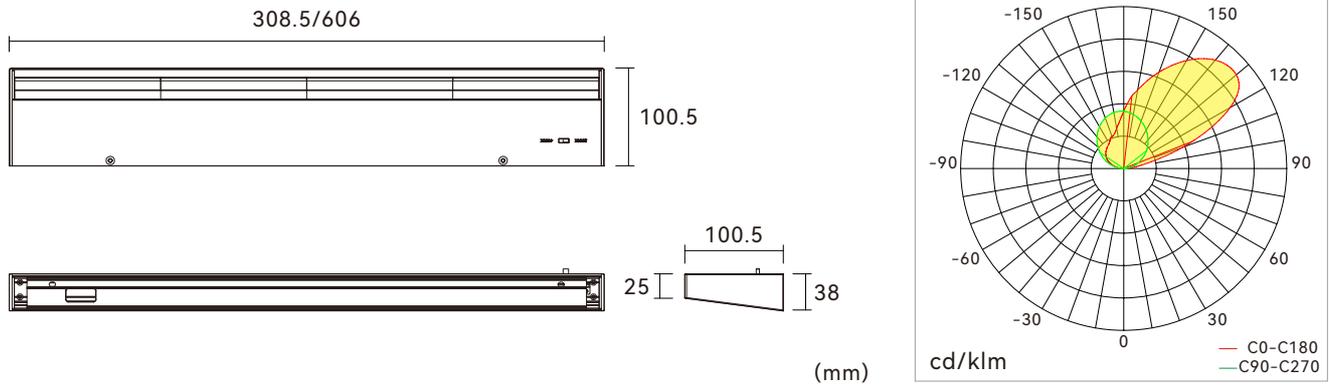


Item No.	BPOW-3002500-NN	BPOW-3002500-DN	BPOW-6005000-NN	BPOW-6005000-DN
Input Power(±10%)	25W		50W	
Input Voltage	AC220~240V			
Power Factor	≥0.9			
Luminous Flux(±10%)	↑ 3000lm		↑ 6000lm	
UGR	<10			
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Optic	Asymmetric optics			
CCT(±200K)	3000/4000 (CCT switchable)			
Colour consistency SDCM	<3			
Dimming	NO	DALI dimming	NO	DALI dimming
Sensor	NO			
Housing Color	Silver / White / Black			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	-40°C~+60°C			
Working Temperature	-20°C~+40°C			
Net Weight	0.7kg (1pcs)		1.3kg (1pcs)	
Gross Weight	2kg (2pcs)		3.9kg (2pcs)	
Package size	410*182*210mm (2pcs)		708*182*210mm (2pcs)	
20GP	4100pcs		2400pcs	
40GP	8400pcs		4900pcs	
40HQ	9100pcs		5300pcs	

Packaging

25W

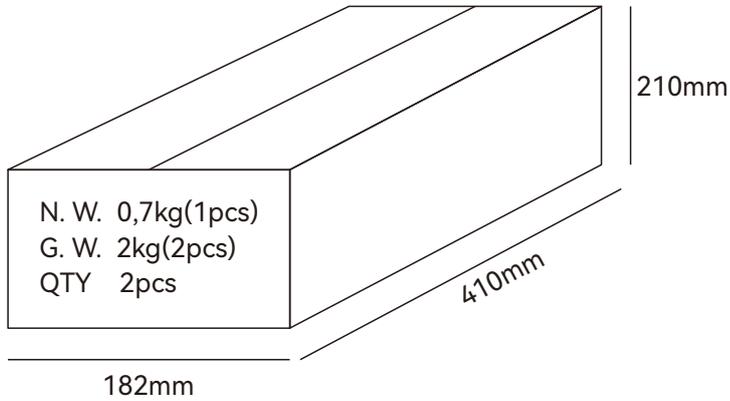

50W

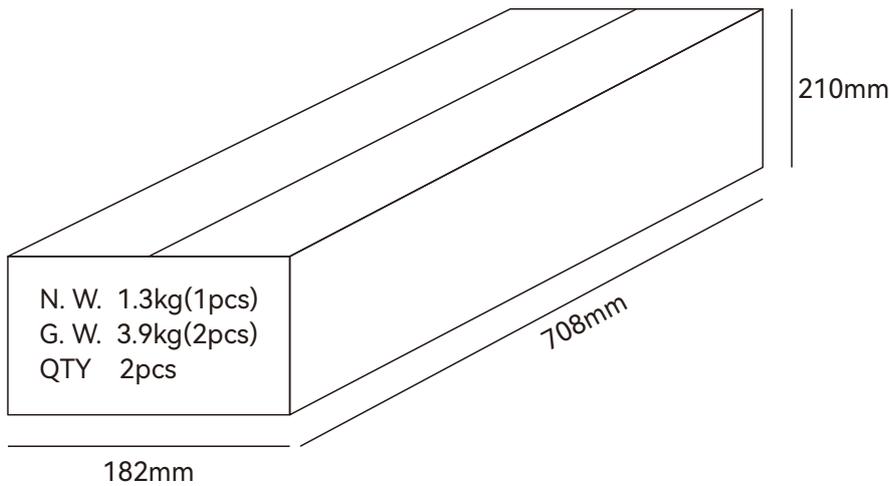

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.