

The modern and minimalist shape fits perfectly into a variety of outdoor architectural environments. The luminaire is designed with a die-cast head, extruded aluminum body and lens optics. It adopts high quality coating while the exquisite surface treatment gives it a high-end textured appearance. The finish provides excellent weather resistance and the luminaire is IP65/IK08 rated.

Main advantages of PEGO: Excellent optical design, 45° large-angle polarization, light distribution of single light can cover up to 8 x 4M. We provide 5 years warranty, mainly used in courtyards, gardens, park paths, commercial buildings, corporate headquarters, passages of public recreational areas, etc.

Features

Clean and minimal appearance integrates seamlessly into various outdoor architectural styles

Professional Optical Design for Outdoor Gardens

45° wide asymmetric beam angle

Uniform illumination across 8x4M coverage


Lamp protection grade IP65/IK08

Quick installation, easy operation





5 years warranty

Application Areas

Suitable for indoor and outdoor facade lighting, architectural decorative lighting, etc.

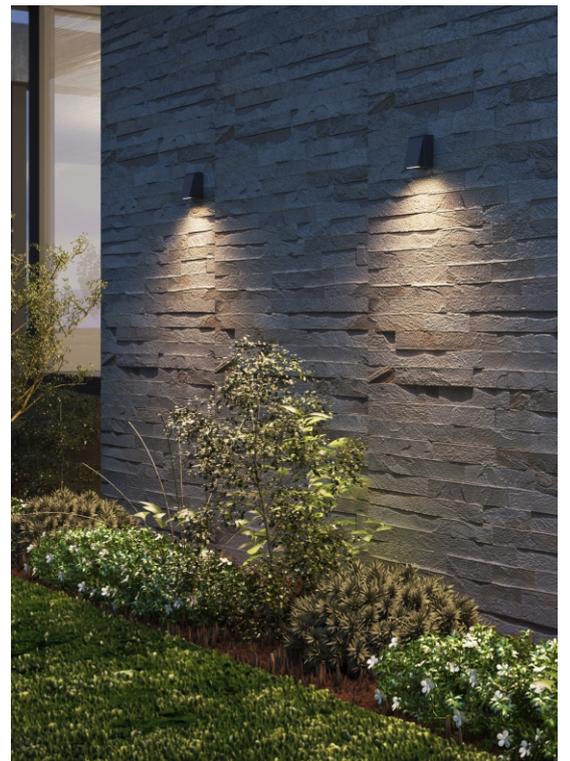

Technical data

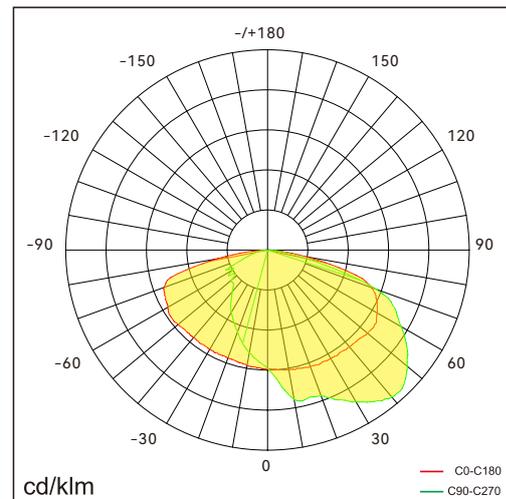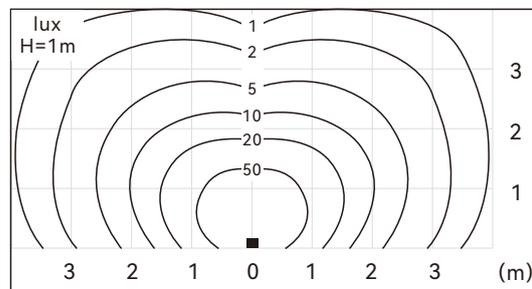

| Item No. | B1PE0-05280-NN | B1PE0-05380-NN | B1PE0-05580-NN |
|--------------------------|------------------------------|----------------|----------------|
| Input Power(±10%) | 5W | | |
| Input Voltage | AC200~240V | | |
| Luminous Flux(±10%) | 550lm | | |
| Colour temperature(±10%) | 2700K | 3000K | 4000K |
| Optic | Asymmetric optics | | |
| Color Rendering Index | >80 | | |
| Life Time | L70(B50)50,000H | | |
| Colour consistency SDCM | <3 | | |
| Dimming | ON/OFF | | |
| Sensor | NO | | |
| Housing Color | Black/White/Silver/Dark Grey | | |
| Fixture Materia | ADC12+6063AL+PC | | |
| Protection Level | IP65/IK08 | | |
| Storage Temperature | -40°C~+80°C | | |
| Working Temperature | -20°C~+40°C | | |
| Net Weight | | | |
| size | 70*78*100mm | | |
| Package size | 410*322*145mm (6Pcs) | | |
| 20GP | | | |
| 40GP | | | |

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.

