

Our Equo-P pendant light design embodies a minimalist, stylish, and imaginative concept, employing exquisite process and rigorous material selection standards to achieve a richly textured appearance. The optical module comprises microstructured optical lenses and anti-glare louvre, with UGR < 13. Comfortable and soft light distribution is achieved through different beam angles (75° for direct light and 155° for indirect light). Typical luminous efficacy reaches 135 lm/W, flicker free. It supports DIP switch in CCT and power. Linkable optional. The main materials are aluminum, steel, and PC.

Features

Simple and rich textured design

Light efficiency up to 135lm/W


Lmax ≥ 65° < 1000 cd/m²

Ultimate uniform and quality lighting effects with professional glare control, UGR < 13

Linkable design provide a clean, simple link

Direct and Indirect lighting


5 years warranty

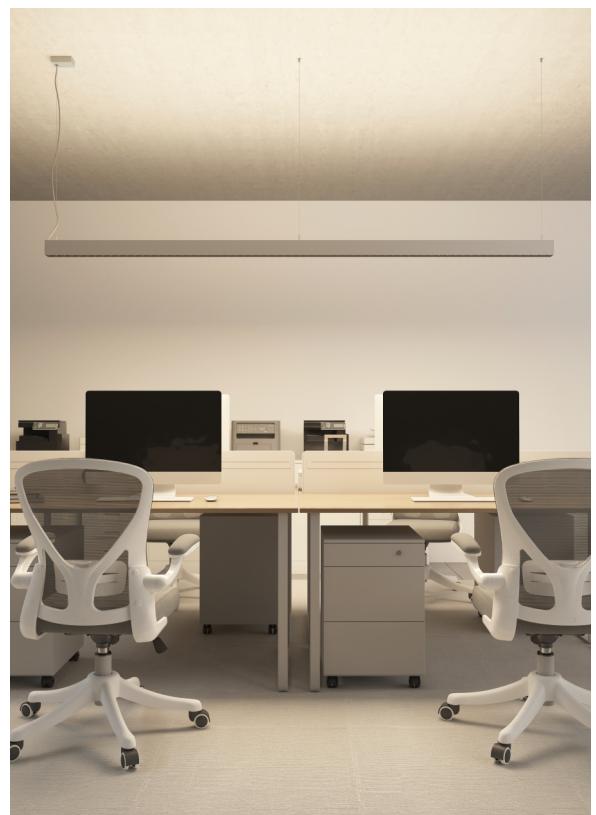

Application Areas

For open-plan office, Individual office, meeting room, Guest room, etc..

Technical data

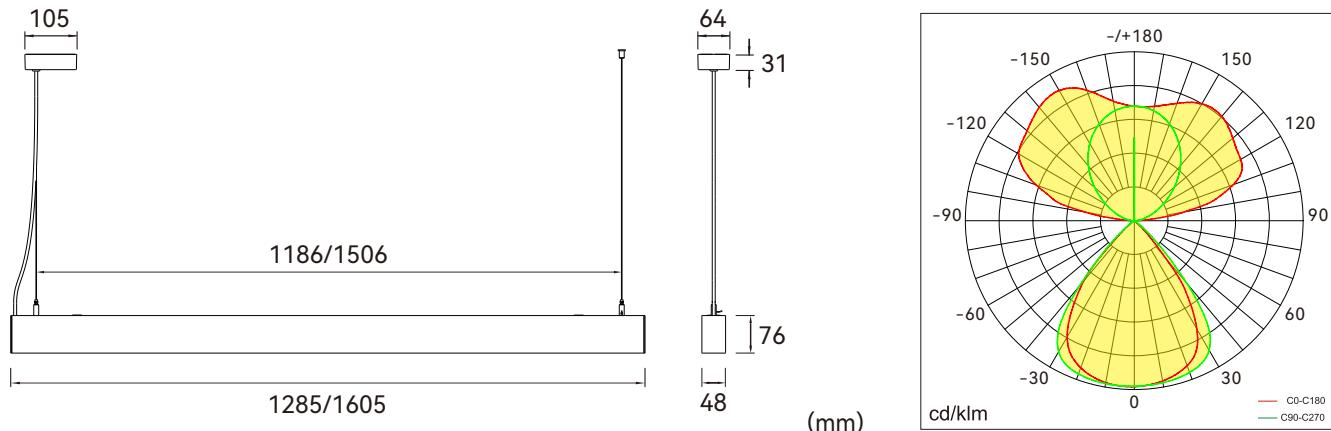

Item No.	BEQP-1206024-NN	BEQP-1206024-DN	BEQP-1507028-NN	BEQP-1507028-DN
Input Power($\pm 10\%$)	50W ($\uparrow 30W/20W \downarrow$)/ 60W ($\uparrow 36W/24W \downarrow$) power switchable	60W ($\uparrow 36W/24W \downarrow$)/ 70W ($\uparrow 42W/28W \downarrow$) power switchable		
Input Voltage		AC200~240V		
Power Factor		≥ 0.9		
Luminous Flux($\pm 10\%$)	6500lm ($\uparrow 4200lm/2300lm \downarrow$) (50W) 7650lm ($\uparrow 5000lm/2650lm \downarrow$) (60W)	7850lm ($\uparrow 5200lm/2650lm \downarrow$) (60W) 9000lm ($\uparrow 6000lm/3000lm \downarrow$) (70W)		
UGR		<13		
Color Rendering Index		>80		
Life Time		L80(B10)50,000H		
Beam Angle		$\uparrow 155^\circ/75^\circ \downarrow$		
CCT($\pm 200K$)		3000/4000K CCT switchable		
Colour consistency SDCM		<3		
Dimming	On/off	DALI dimming	On/off	DALI dimming
Sensor		NO		
Housing Color		Silver / White / Black		
Fixture Material		6063AL		
Protection Level		IP20		
Storage Temperature		-40°C~+60°C		
Working Temperature		-20°C~+40°C		
Net Weight	2.8kg			
Gross Weight	3.8kg			

Shenzhen NEXOL Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110

All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen NEXOL Lighting Co., Ltd.. All rights reserved.

