


# ELFOO-F 2.0 free standing luminaire

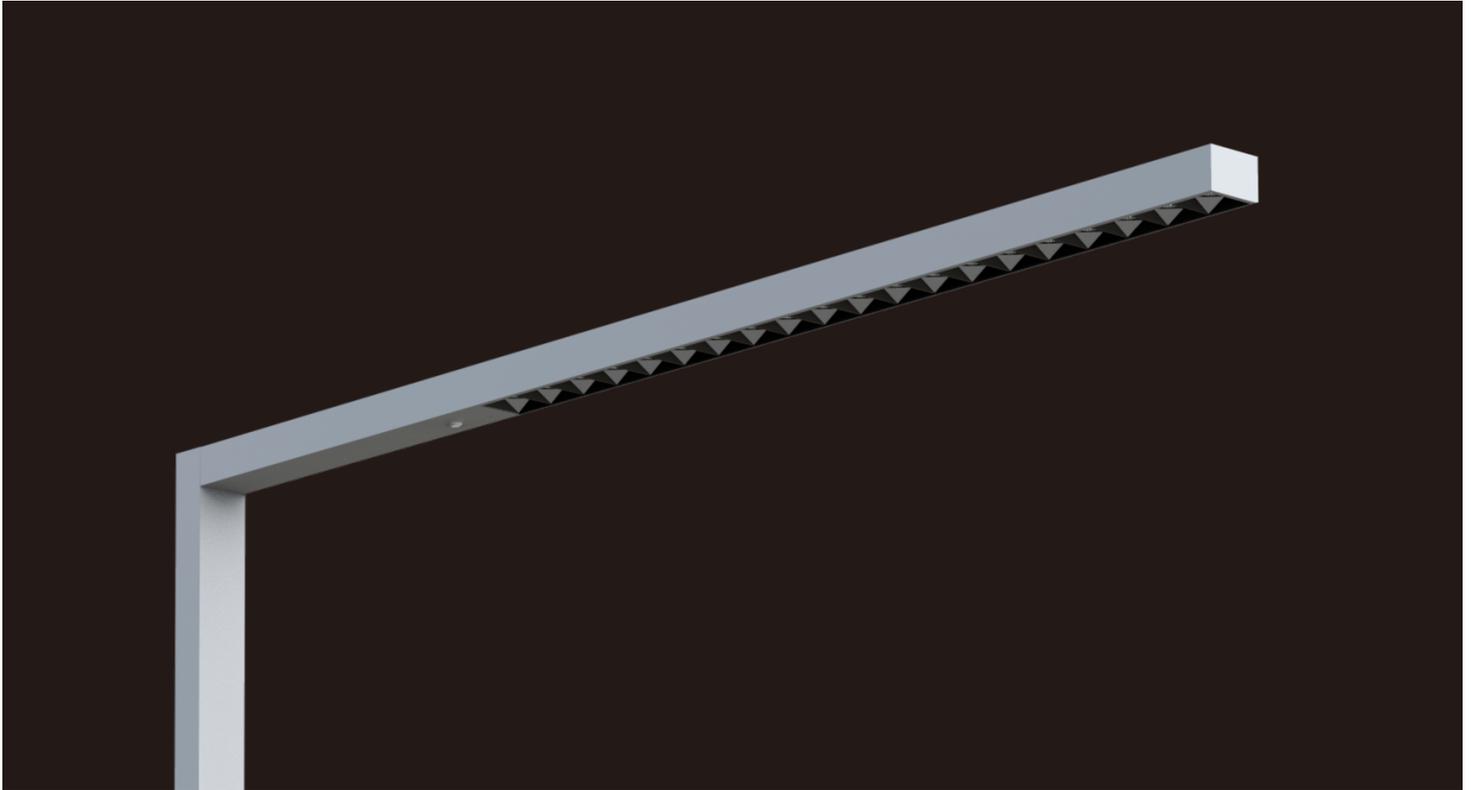

We designed ELFOO Floor with a concept of Simple, Fashionable and imaginative. Also with excellent craftwork and strict standard for materials. Appearance with rich texture. We use special Micro reflector and anti-glare cover, UGR<12, comfortable and soft lights distribution by different beam angle for Direct 75° & Indirect 155°. Suitable for two desks of 1\*2m offering uniform lighting on eye areas with assembled base. Typical value up to 135lm/W with flicker freely. Separate control for Direct & Indirect lights. Profile aluminum, steel, and PC as main materials. Easy to move and put on the edge of desk based on DIY. No need professional electrician.

## Features

Compact and quality appearance, patent design with rich texture and visual impact

75°/50° beam angle direct lights with perfect UGR control, UGR<12

155° beam angle indirect lights deliver a comfortable lighting for space

Direct and indirect light control Individually

Support for smart control functions

- Touch panel dimming
- Motion sensor
- Day light sensor
- Tunable white(Customizable)
- CASAMBI(optional)
- HCL(optional)
- SWARM(Customizable))

Lighting distribution cover two desks



5 years warranty

## Application Areas

Open-plan office, individual office, etc.




# Technical data

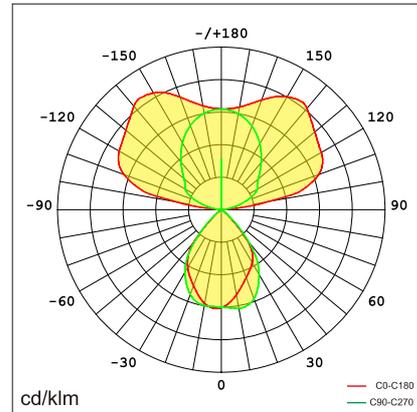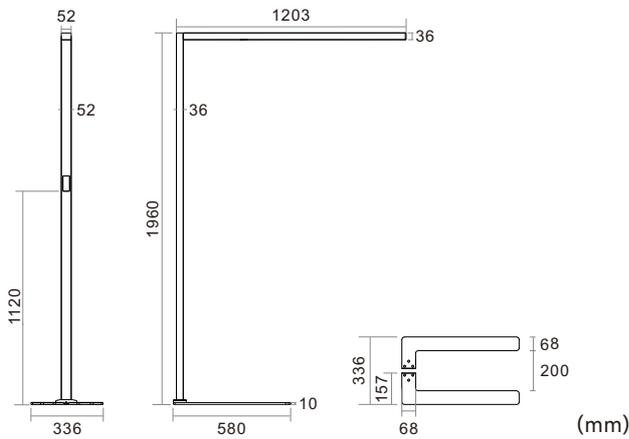

Item No.	BEFF-1908020-BD-01	BEFF-1908020-CD-01	BEFF-1908020-CC-01
Input Power(±10%)	↑ 60W/20W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	10800lm(↑ 8500lm/2300lm ↓)	9600lm(↑ 7500lm/2100lm ↓)	9600lm(↑ 8800lm/1700lm ↓)
UGR	<12		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 155°/75°or50° ↓		
CCT(±200K)	3000/4000/6000K	3000-5700K	3000-5700K
Colour consistency SDCM	< 3		
Dimming	Touch panel dimming		
Sensor	Daylight sensor & Motion sensor		Casambi
Housing Color	Silver / White / Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	11.8kg		
Gross Weight	14.8kg		
Package size	2070*238*140mm(1pcs)		
20GP	442pcs		
40GP	935pcs		
40HQ	990pcs		

# Packaging

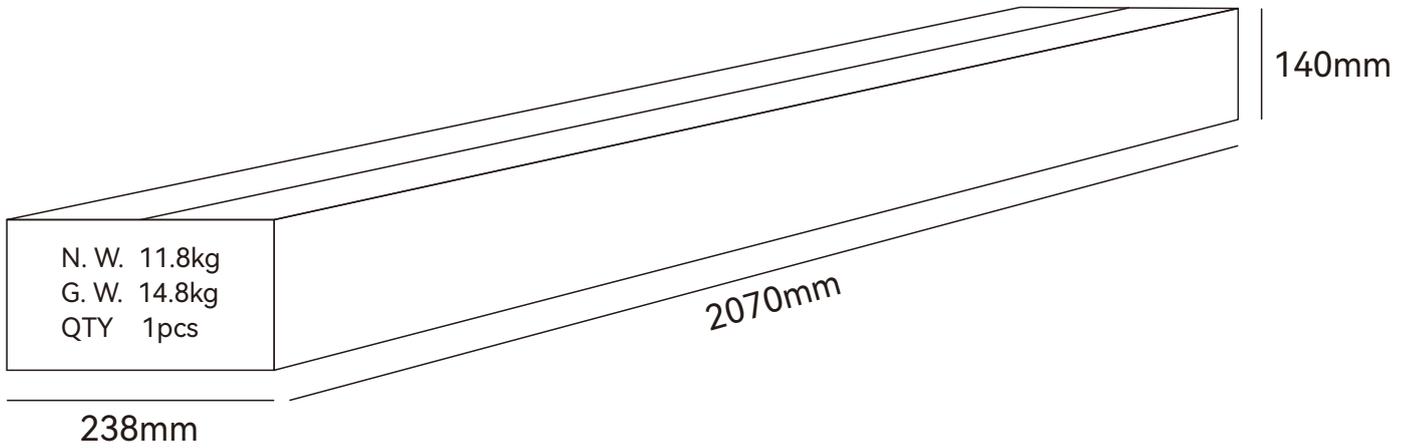

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.