


## LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 23.14 lm/W			
MODEL		Imax(cd)	857.6	S/MH(C0/180)	1.23
NOMINAL POWER(W)	80	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	230.0	TOTAL FLUX(lm)	1800.2	$\eta$ UP,DN(C0-180)	0.0,49.2
NOMINAL FLUX(lm)	1800.16	CIE CLASS	DIRECT	$\eta$ UP,DN(C180-360)	0.0,50.8
LAMPS INSIDE	1	$\eta$ up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230.0	$\eta$ down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

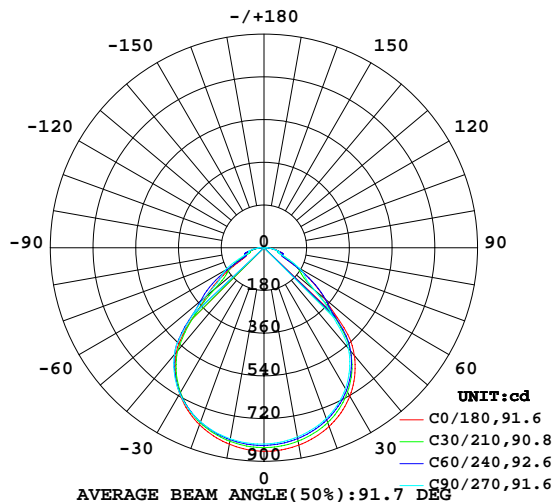

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

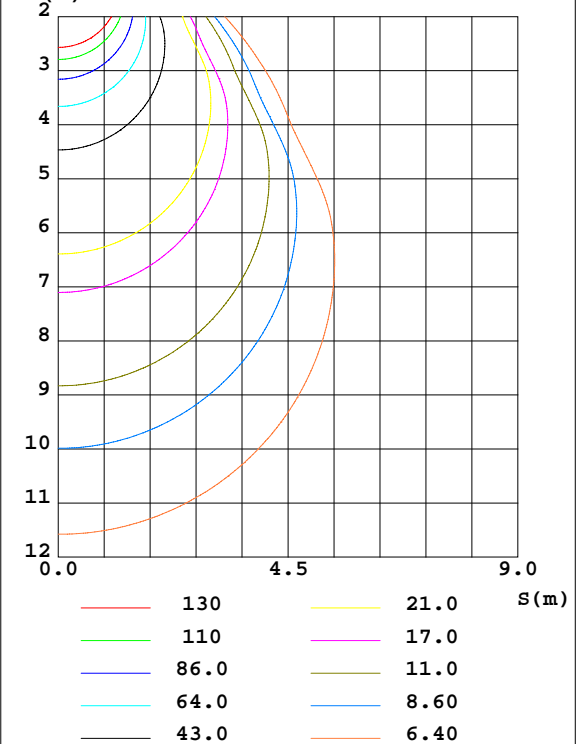

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity:65.0%  
Test Distance:11.700m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	844.4	822.2	809.7	803.6	840.5	823.8	817.5	811.4	0- 10	78.74	78.74	4.37,4.37
20	801.4	779.0	766.2	757.8	793.7	781.7	781.2	772.9	10- 20	225.9	304.6	16.9,16.9
30	722.9	700.5	686.5	677.5	710.6	703.5	709.7	700.6	20- 30	341.5	646.2	35.9,35.9
40	592.5	568.9	551.9	544.6	573.9	570.9	586.9	578.2	30- 40	399.6	1046	58.1,58.1
50	335.8	310.7	277.9	300.5	316.6	309.7	325.7	327.9	40- 50	338.2	1384	76.9,76.9
60	149.6	171.9	170.8	157.9	131.7	173.0	188.4	179.4	50- 60	206.6	1591	88.4,88.4
70	80.71	93.21	65.66	89.10	81.79	93.88	74.63	98.68	60- 70	114.1	1705	94.7,94.7
80	48.38	39.60	45.22	39.30	45.08	41.25	52.15	41.97	70- 80	68.86	1774	98.5,98.5
90	2.294	1.246	0.6873	0.6959	1.117	1.727	3.986	3.540	80- 90	26.65	1800	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity:65.0%  
Test Distance:11.700m [K=1.0000]  
Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:

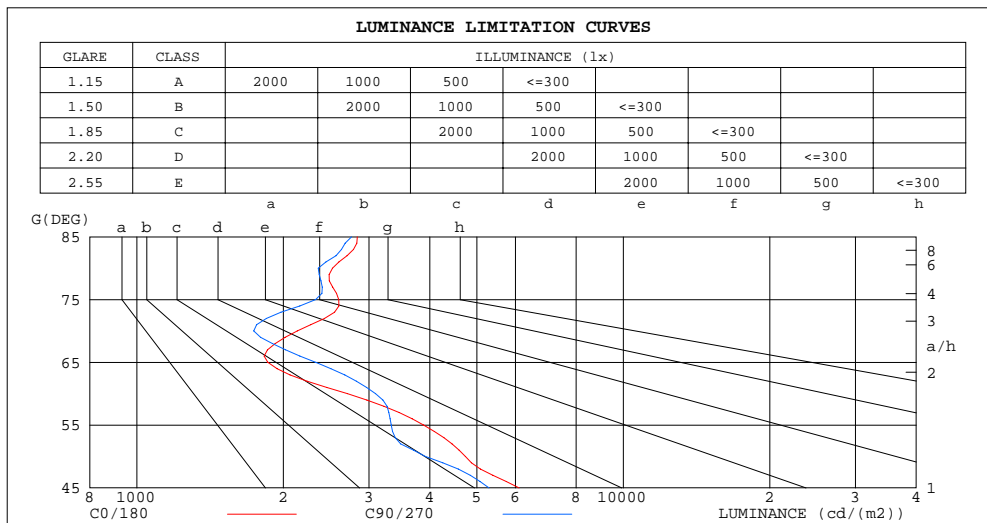

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2838	2762
80	2524	2359
75	2601	2330
70	2137	1739
65	1858	2332
60	2710	3095
55	3886	3332
50	4733	3916
45	6108	5295


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity:65.0%  
Test Distance:11.700m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.06	1.02	.99	1.04	1.01	.98	.90	.97	.94	.96	.94	.92	.92	.91	.89	.87
2.0	.95	.89	.84	.93	.87	.83	.89	.85	.81	.86	.82	.79	.83	.80	.77	.75
3.0	.85	.77	.72	.83	.76	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.68	.62	.72	.66	.61	.70	.65	.60	.68	.63	.60	.58
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.55	.49	.62	.54	.48	.60	.53	.48	.58	.52	.48	.57	.52	.47	.45
7.0	.57	.49	.44	.57	.49	.43	.55	.48	.43	.54	.47	.43	.52	.47	.43	.41
8.0	.53	.45	.39	.52	.44	.39	.51	.44	.39	.49	.43	.39	.48	.43	.39	.37
9.0	.49	.41	.36	.48	.41	.36	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
10.0	.45	.38	.33	.44	.37	.33	.44	.37	.32	.43	.37	.32	.42	.36	.32	.30

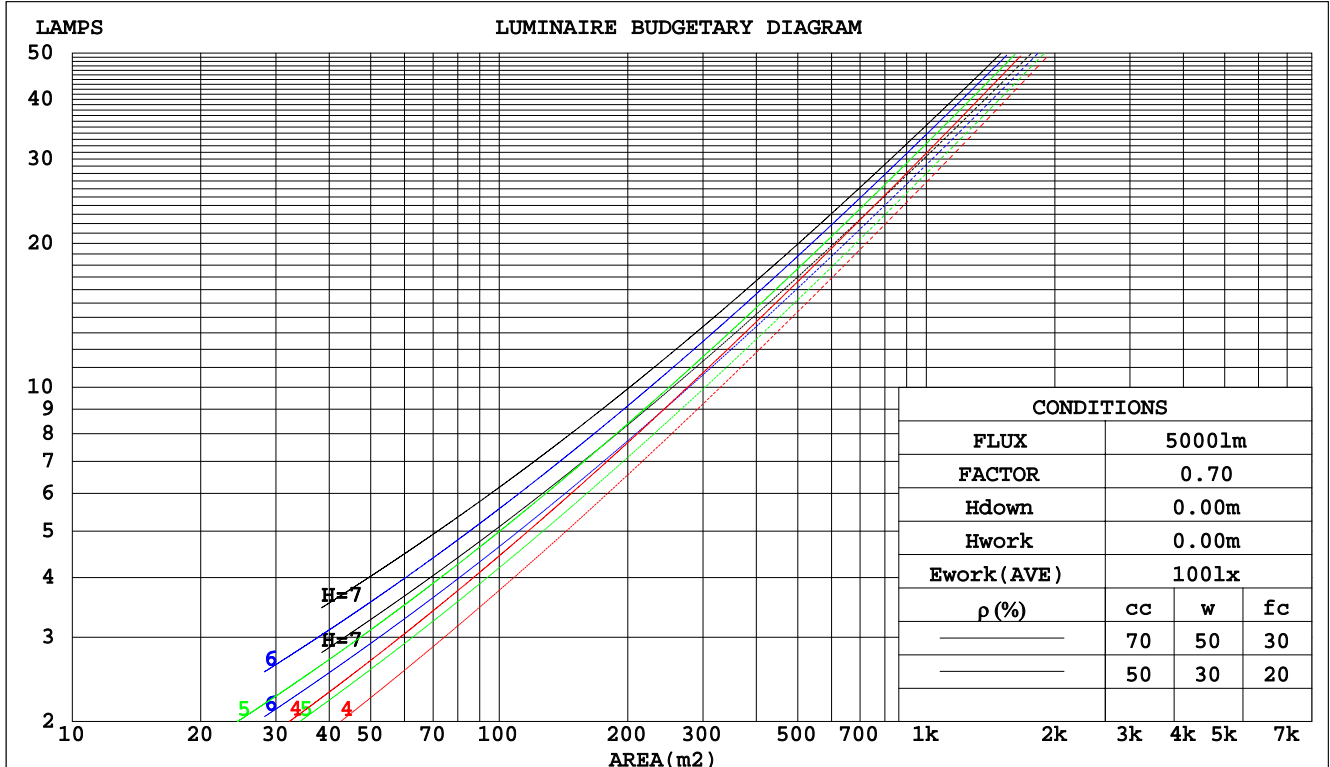

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2024-04-17

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity:65.0%  
Test Distance:11.700m [K=1.0000]  
Remarks:

## WEC AND CCEC

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm					
NAME:		TYPE:		WEIGHT:	
SPEC.:		DIM.: 610*280*42		SERIAL No.:	
MFR.:		SUR.:0.6*0.184		Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.266	.151	.048	.259	.148	.047	.246	.141	.045	.234	.135	.043	.223	.129	.042	
2.0	.252	.138	.042	.246	.135	.042	.235	.130	.041	.224	.126	.039	.214	.121	.038	
3.0	.236	.126	.038	.231	.124	.037	.221	.120	.036	.212	.116	.036	.203	.112	.035	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.192	.104	.032	
5.0	.206	.105	.030	.202	.104	.030	.195	.101	.030	.187	.099	.029	.181	.097	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.182	.090	.025	.179	.089	.025	.172	.087	.025	.167	.085	.025	.161	.084	.025	
8.0	.171	.084	.024	.168	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.177	.157	.138	.152	.134	.119	.104	.092	.082	.060	.053	.048	.019	.017	.015	
2.0	.167	.132	.103	.143	.114	.089	.098	.079	.062	.056	.046	.036	.018	.015	.012	
3.0	.158	.114	.079	.135	.098	.069	.093	.068	.048	.054	.040	.028	.017	.013	.009	
4.0	.150	.100	.063	.129	.087	.054	.088	.060	.038	.051	.035	.023	.016	.012	.007	
5.0	.142	.090	.051	.122	.078	.044	.084	.054	.031	.049	.032	.018	.016	.010	.006	
6.0	.135	.081	.042	.116	.070	.037	.080	.049	.026	.047	.029	.015	.015	.009	.005	
7.0	.129	.074	.036	.111	.064	.031	.077	.045	.022	.045	.027	.013	.014	.009	.004	
8.0	.123	.068	.031	.106	.059	.027	.073	.042	.019	.043	.024	.011	.014	.008	.004	
9.0	.117	.063	.027	.101	.055	.023	.070	.039	.017	.041	.023	.010	.013	.007	.003	
10.0	.112	.059	.024	.097	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2024-04-17

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
 Humidity:65.0%  
 Test Distance:11.700m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.: 610*280*42			SERIAL No.:			
MFR.:					SUR.:0.6*0.184			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	16.7	18.1	16.9	18.2	18.4	16.8	18.1	17.0	18.3	18.5
	3H	17.3	18.6	17.6	18.8	19.0	17.4	18.7	17.7	18.9	19.1
	4H	17.8	19.0	18.1	19.2	19.4	17.8	18.9	18.1	19.2	19.4
	6H	18.1	19.2	18.5	19.5	19.8	18.1	19.2	18.4	19.5	19.7
	8H	18.3	19.4	18.7	19.7	20.0	18.3	19.3	18.6	19.6	19.9
	12H	18.5	19.5	18.8	19.8	20.1	18.4	19.5	18.8	19.7	20.0
4H	2H	16.9	18.1	17.2	18.3	18.6	16.9	18.1	17.2	18.4	18.6
	3H	17.7	18.7	18.1	19.0	19.3	17.8	18.9	18.2	19.2	19.4
	4H	18.3	19.2	18.6	19.5	19.9	18.4	19.3	18.7	19.6	19.9
	6H	18.8	19.6	19.2	20.0	20.3	18.8	19.6	19.2	20.0	20.4
	8H	19.1	19.8	19.5	20.2	20.6	19.1	19.9	19.5	20.2	20.6
	12H	19.3	20.0	19.7	20.4	20.8	19.3	20.0	19.8	20.4	20.8
8H	4H	18.5	19.2	18.9	19.6	20.0	18.5	19.3	18.9	19.7	20.0
	6H	19.1	19.8	19.6	20.2	20.6	19.2	19.8	19.6	20.2	20.6
	8H	19.5	20.1	20.0	20.5	20.9	19.6	20.1	20.0	20.5	21.0
	12H	19.9	20.4	20.4	20.8	21.3	19.9	20.4	20.4	20.8	21.3
12H	4H	18.5	19.2	18.9	19.6	20.0	18.5	19.2	18.9	19.6	20.0
	6H	19.2	19.8	19.6	20.2	20.6	19.2	19.8	19.7	20.2	20.7
	8H	19.6	20.1	20.1	20.6	21.0	19.7	20.2	20.1	20.6	21.1
Variations with the observer position at spacings:											
S = 1.0H		+ 0.6 / - 0.6					+ 0.6 / - 0.7				
1.5H		+ 0.3 / - 0.4					+ 0.2 / - 0.7				
2.0H		+ 1.2 / - 0.8					+ 0.9 / - 1.5				

CIE Pub.117, 1800 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 2.0$ )

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2024-04-17

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
 Humidity: 65.0%  
 Test Distance: 11.700m [K=1.0000]  
 Remarks:

## UTILIZATION FACTORS TABLE

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	65	55	49	65	55	49	64	54	49	43
0.80	75	65	59	74	65	59	73	64	58	52
1.00	83	74	68	82	73	67	80	74	67	61
1.25	90	81	75	88	80	74	86	79	74	67
1.50	94	86	80	92	85	79	90	83	78	72
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	105	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	106	103	108	105	101	104	101	98	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 $\gamma$  Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity:65.0%  
Test Distance:11.700m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:

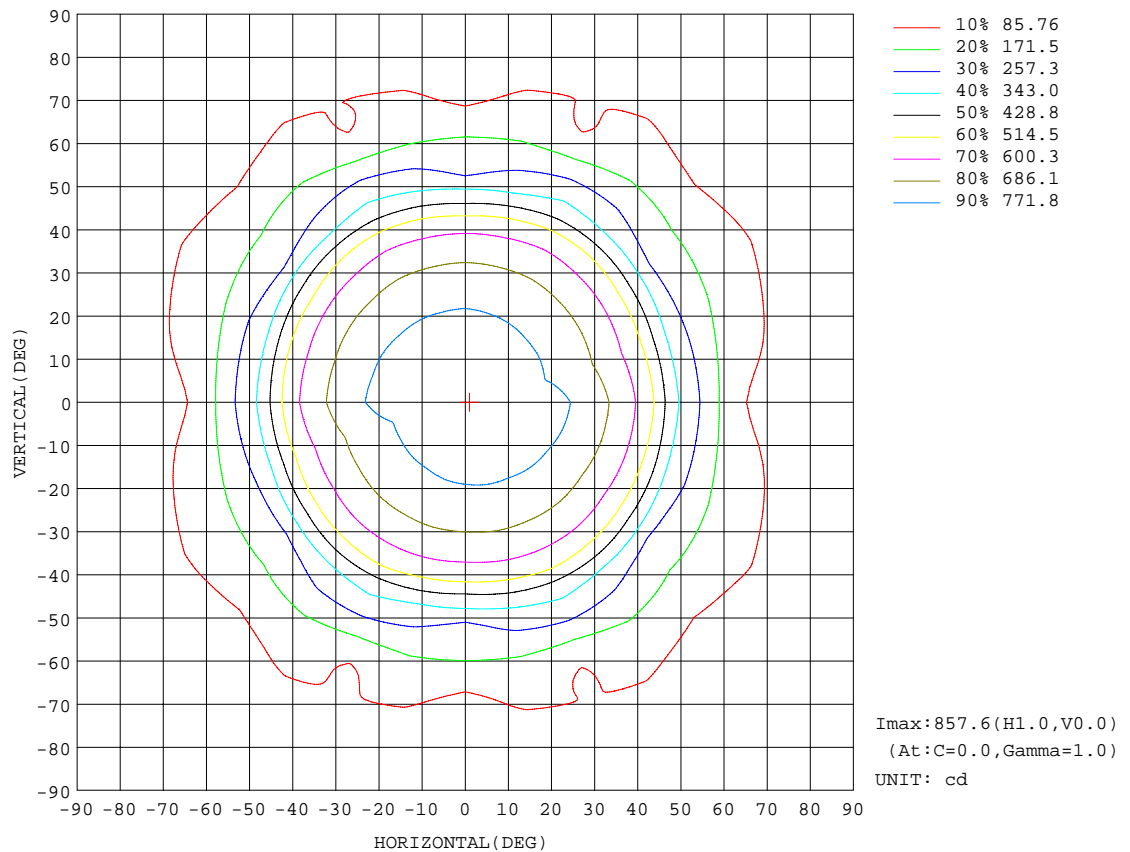


C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity:65.0%  
Test Distance:11.700m [K=1.0000]  
Remarks:



## AAI CURVES

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:

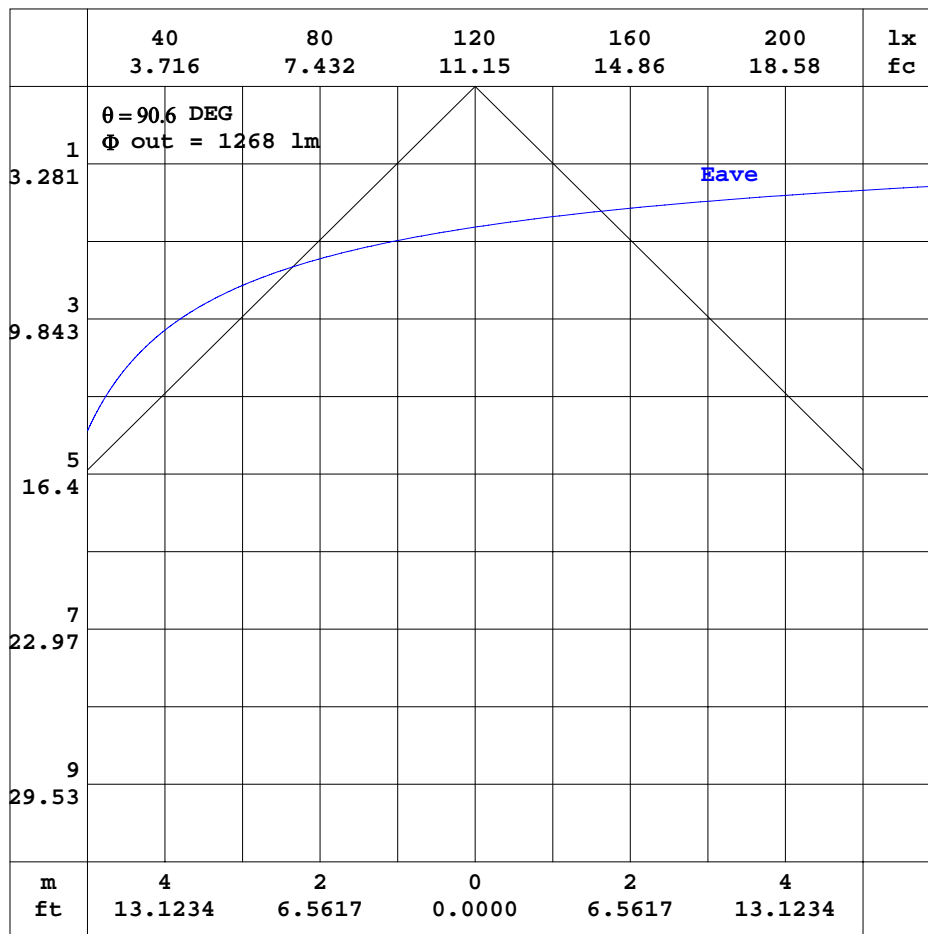


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity: 65.0%  
Test Distance: 11.700m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:

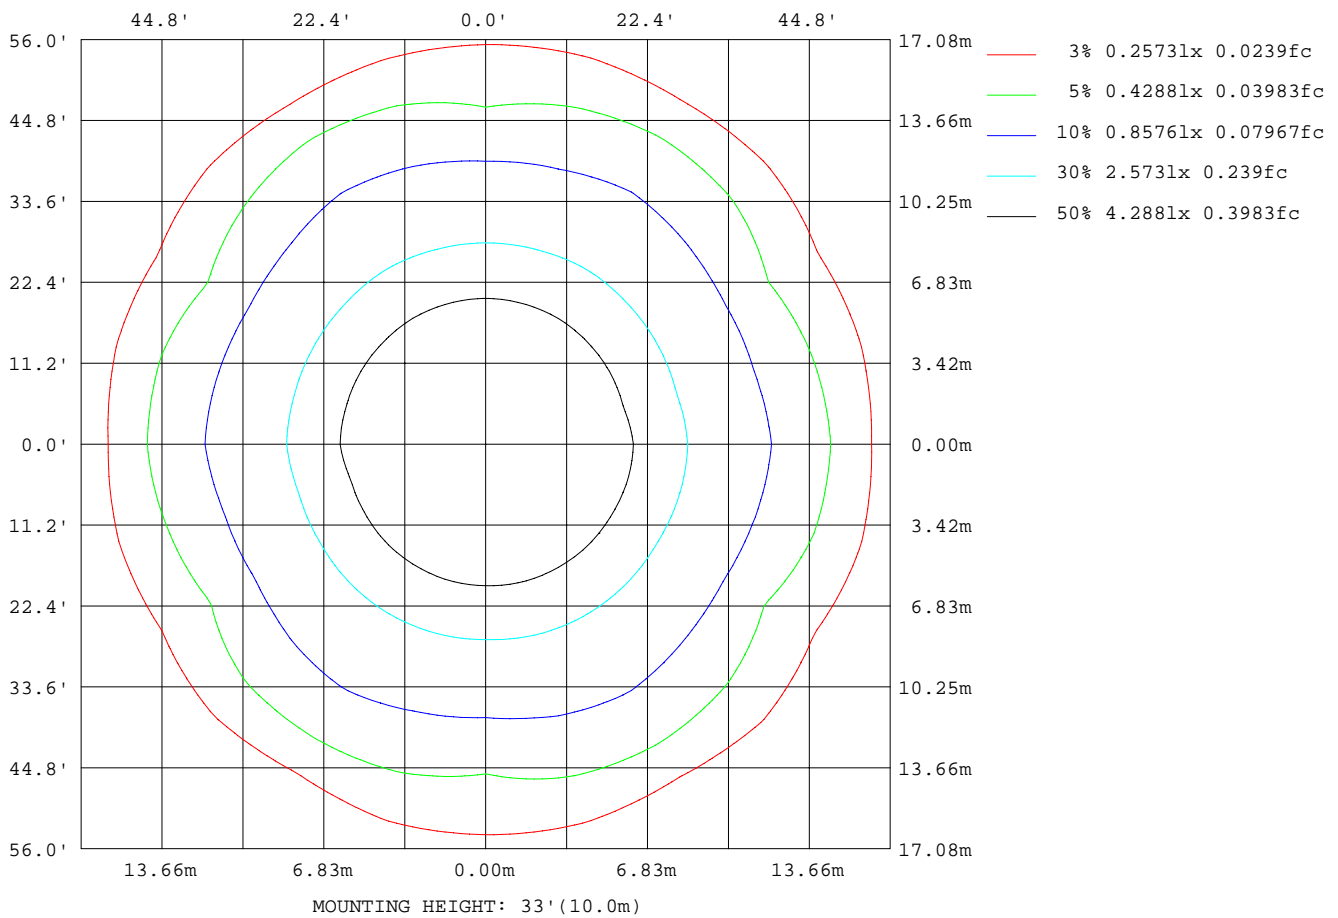

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity: 65.0%  
Test Distance: 11.700m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:229.65V I:0.3460A P:77.797W PF:0.9790 Freq:49.99Hz Lamp Flux:1800.16x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.: 610*280*42	SERIAL No.:
MFR.:	SUR.:0.6*0.184	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1816
L_0~180(75)av	2497
L_0~180(85)av	2547
L_90~270(65)av	2534
L_90~270(75)av	2322
L_90~270(85)av	3079
L_45(65)av	2649
L_45(75)av	2249
L_45(85)av	2554

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2024-04-17

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity:65.0%  
Test Distance:11.700m [K=1.0000]  
Remarks:

## Planar Illuminance Curve

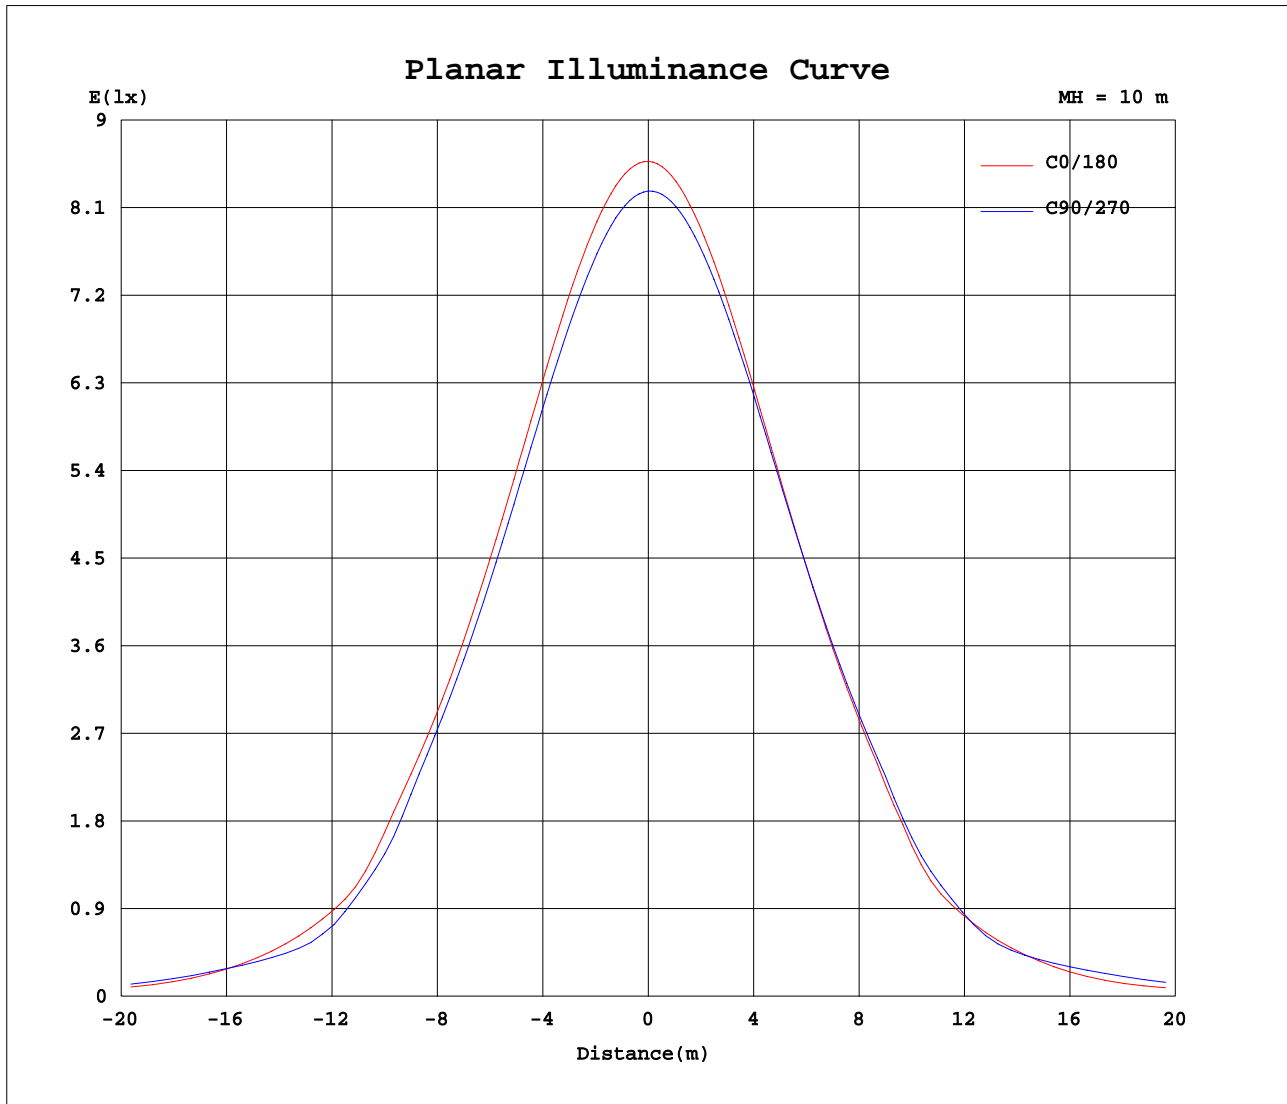

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2024-04-17

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.406.10  
Humidity: 65.0%  
Test Distance: 11.700m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.406.10
Humidity:65.0%
Test Distance:11.700m [K=1.0000]
Remarks:

```