


# NITEC 3.0 free standing luminaire

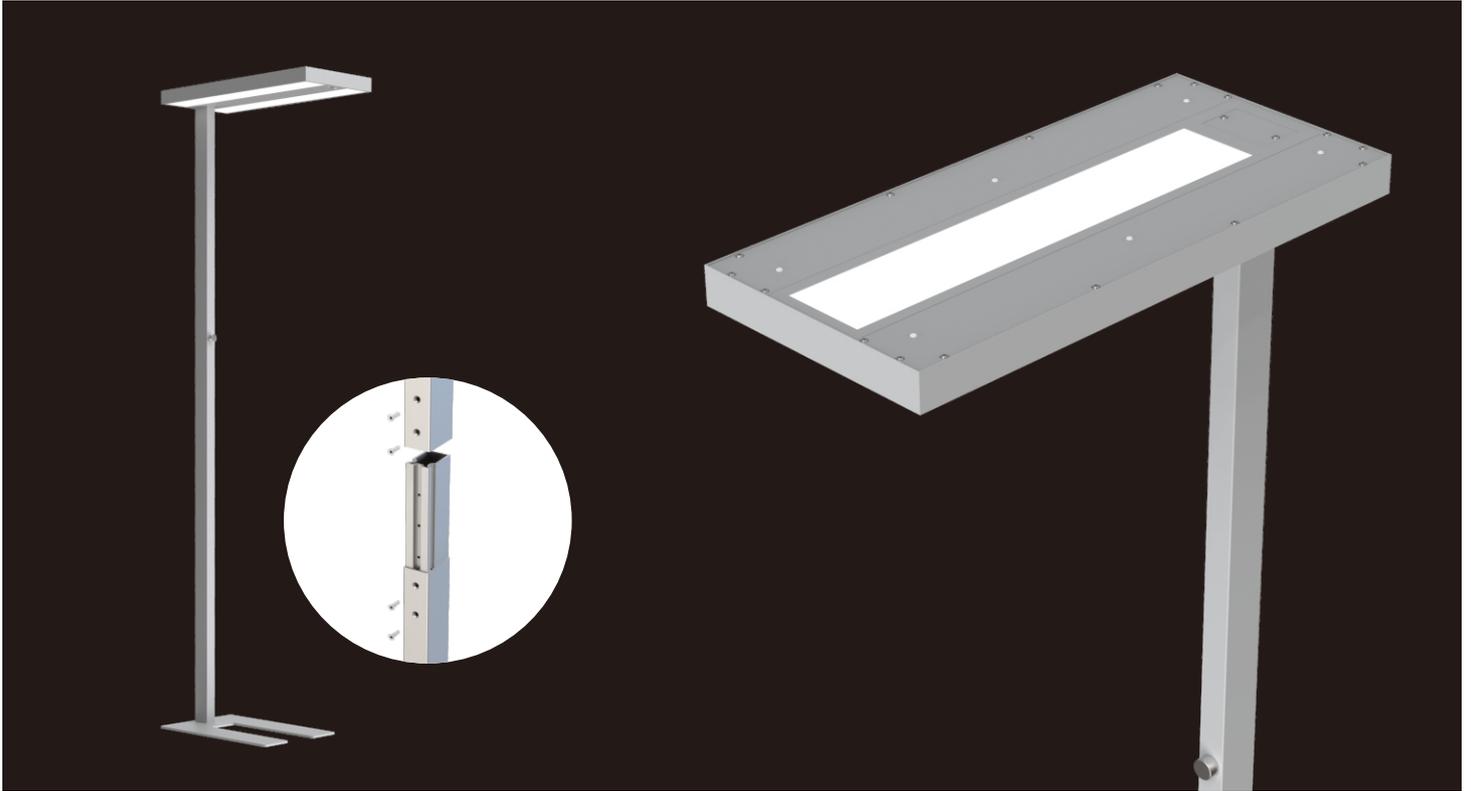

Inheriting classic design, square corner structure, perfect assembly details makes exquisite appearance with rich texture. The product emits downwards and adopts a diffuser plate of a microprism structure to realize an anti-glare function, the beam angle is about 90 degrees, the upward beam angle is 110 degrees. DIY assembly, no need professionals, portable on the side of the desktop, easy installation, flexible using. Typical value is 145LM/W, flicker free, KNOB dimming, 50% DIRECT / 50% INDIRECT synchronous dimming control, and other intelligent control like motion sensor and day light sensor, etc. The main materials are aluminum profiles, steel and PMMA. With cuttable pole. The item is especially designed for WHOLESALER sales channels.

## Features

---

Simple and exquisite industrial design with rich texture

---

High lumen efficiency reach to 145LM/W, fitting with a 2000lm direct and 9600lm indirect lights, total 11600lm lumen output

---

UGR<19,lighting uniform and healthy

---

Integrated packaging, easy for transportation and online sales

---

Support smart control functions

- Knob dimming
- Motion sensor
- Daylight sensor

---

5 years warranty

---

## Application Areas



---

Open-plan office, individual office, etc.

---





## Technical data

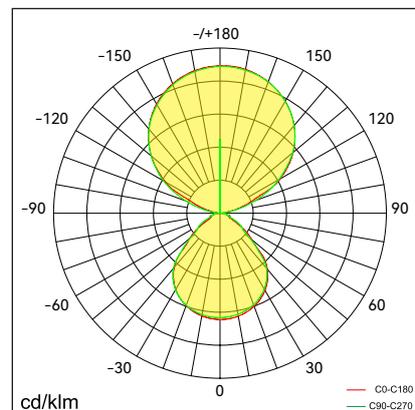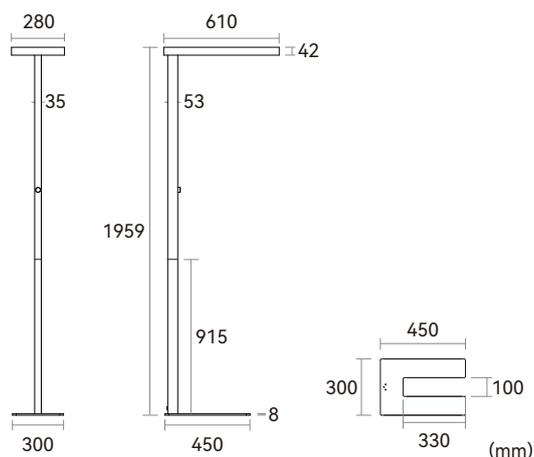



Item No.	BNIJ-1906030-BN-01	BNIJ-1906030-BM-01	BNIJ-1906030-BD-01
Input Power(±10%)	↑ 30W/30W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	↑ 4990lm/2740lm ↓		
UGR	<16		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 110°/90° ↓		
CCT(±200K)	3000/4000/6000K		
Colour consistency SDCM	<3		
Dimming	Knob dimming		
Sensor	NO	Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White/Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	12.5kg		
Package size	1190*400*145mm		
20GP	352pcs		
40GP	800pcs		

## Technical data

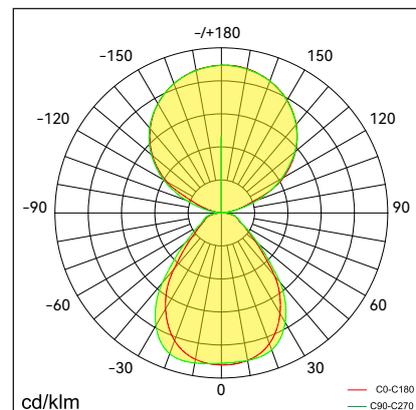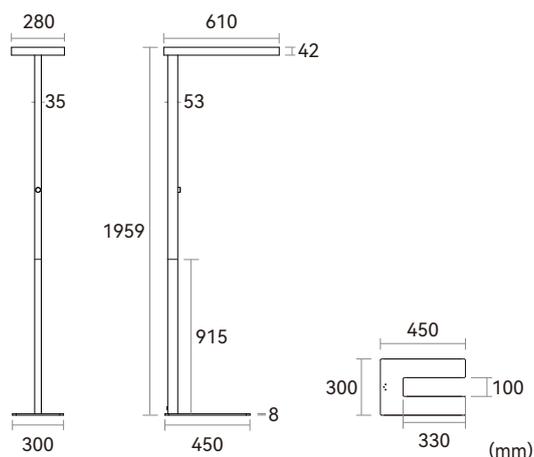


Item No.	BNIJ-1908040-BN-01	BNIJ-1908040-BM-01	BNIJ-1908040-BD-01
Input Power(±10%)	↑ 40W/40W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	↑ 6300lm/4500lm ↓		
UGR	<19		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 110°/90° ↓		
CCT(±200K)	3000/4000/6000K		
Colour consistency SDCM	<3		
Dimming	Knob dimming		
Sensor	NO	Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White/Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	12.5kg		
Package size	1190*400*145mm		
20GP	352pcs		
40GP	800pcs		

# Technical data

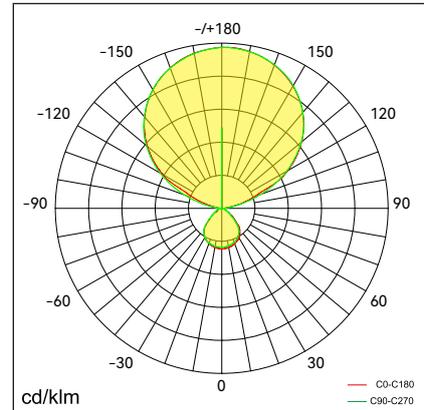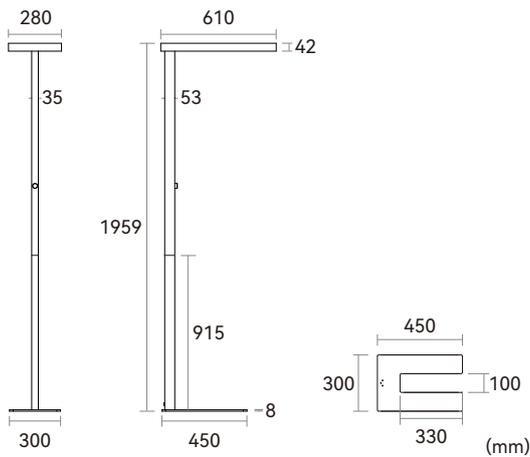

Item No.	BNIJ-1908020-BN	BNIJ-1908020-BM	BNIJ-1908020-BD
Input Power(±10%)	↑ 60W/20W ↓		
Input Voltage	AC200~240V		
Power Factor	≥0.9		
Luminous Flux(±10%)	↑ 9600lm/2000lm ↓		
UGR	<11		
Color Rendering Index	>80		
Life Time	L80(B10)50,000H		
Beam Angle	↑ 110°/90° ↓		
CCT(±200K)	3000/4000/6000K		
Colour consistency SDCM	<3		
Dimming	Knob dimming		
Sensor	NO	Motion sensor	Daylight sensor Motion sensor
Housing Color	Silver/White/Black		
Fixture Materia	6063AL		
Protection Level	IP20		
Storage Temperature	-40°C~+80°C		
Working Temperature	-20°C~+45°C		
Net Weight	12.5kg		
Package size	1190*400*145mm		
20GP	352pcs		
40GP	800pcs		

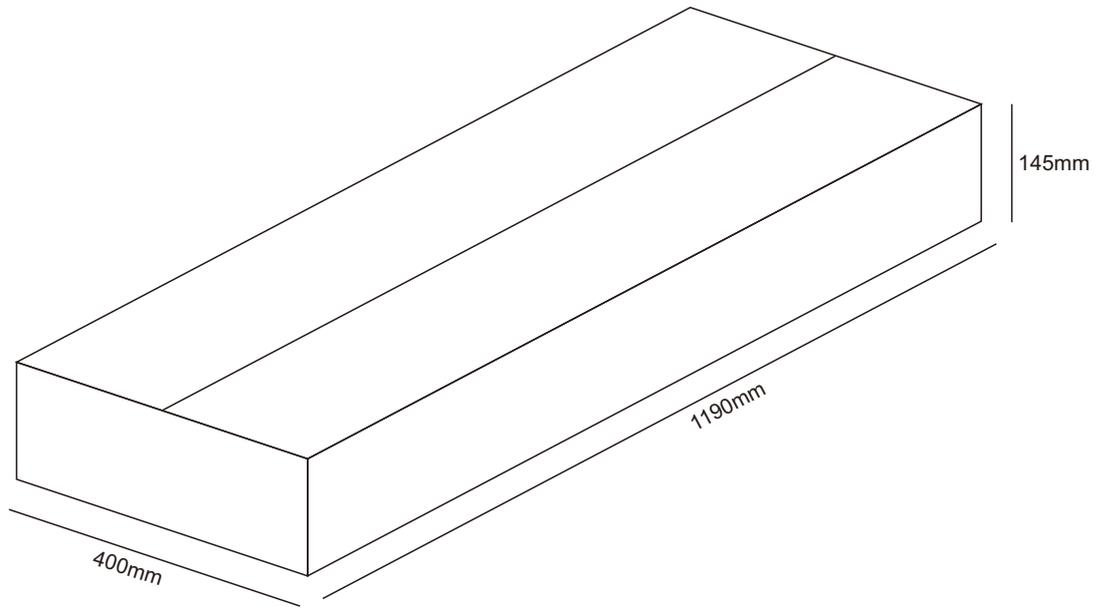

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: [info@nexol-lighting.com](mailto:info@nexol-lighting.com)

[www.nexol-lighting.com](http://www.nexol-lighting.com)

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.