

ROMI-C 2.0 Surface mounted luminaires



Simple, classic design with excellent craftwork. Appearance with rich texture. We offer 350mm, 450mm, 600mm for choosing. We use special anti-glare cover, UGR<19. Offering comfortable and soft lights for Indirect to support luminous environment. Typical value up to 140lm/W with flicker freely. Support smart functions like Motion sensor, 1-10V and Dali dimming. Tunable white and Emergency function. Work with CASAMBI wireless system to group setting. Simply assembling structure, flexible to support customers' requirement. Profile aluminum, SGCC and PC as main materials. Surface mounted installation.

Features

Ultimate uniform and quality lighting effects with professional glare control, UGR <19

Light efficiency up to 140lm/W

Come with several size Φ 350, Φ 450, Φ 600

Extremely simple for installation and maintenance

Direct and Indirect lighting

SDCM < 3


5 years warranty

Application Areas


For open-plan office, Individual office, Cafeteria, Corridors, Break-out area, Classroom, etc.



Technical data


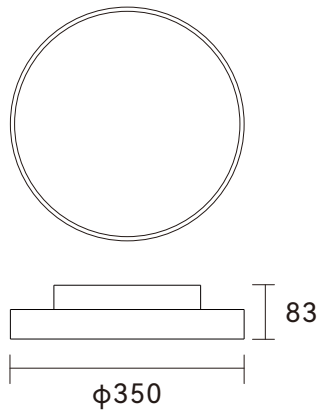


(mm)

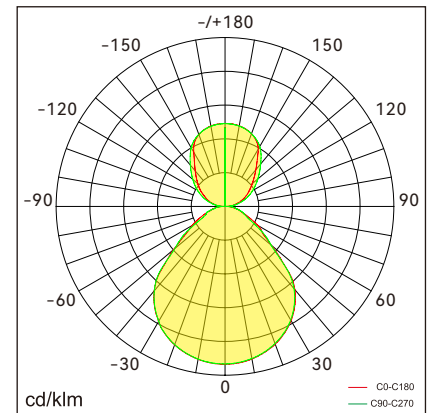



Item No.	BROC-3502417-NN-01	BROC-3502417-DN-01
Input Power($\pm 10\%$)	18W($\uparrow 6$ W/ 12W \downarrow)/ 24W($\uparrow 7$ W/ 17W \downarrow) Power switchable	
Input Voltage	AC220~240V	
Power Factor	≥ 0.9	
Luminous Flux($\pm 10\%$)	2160lm($\uparrow 800$ lm/ 1360lm \downarrow) (18W)/ 2880lm($\uparrow 950$ lm/ 1930lm \downarrow) (24W)	
UGR	<18	
Color Rendering Index	>80	
Life Time	L80(B10)50,000H	
Beam Angle	$\uparrow 95^\circ$ / $95^\circ \downarrow$	
CCT(± 200 K)	3000K/ 4000K (CCT switchable)	
Colour consistency SDCM	<3	
Dimming	NO	DALI dimming
Sensor	NO	
Housing Color	Silver/ White/ Black	
Fixture Materia	6063AL	
Protection Level	IP20	
Storage Temperature	$-40^\circ\text{C} \sim +60^\circ\text{C}$	
Working Temperature	$-20^\circ\text{C} \sim +40^\circ\text{C}$	
Net Weight	2.62kg	
Gross Weight	3.6kg	
Package size	430*430*145mm	
20GP	1150pcs	
40GP	2340pcs	
40HQ	2650pcs	

Technical data

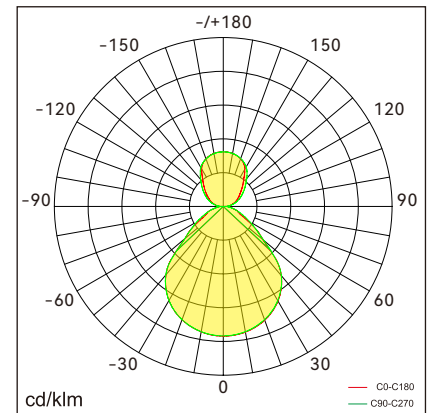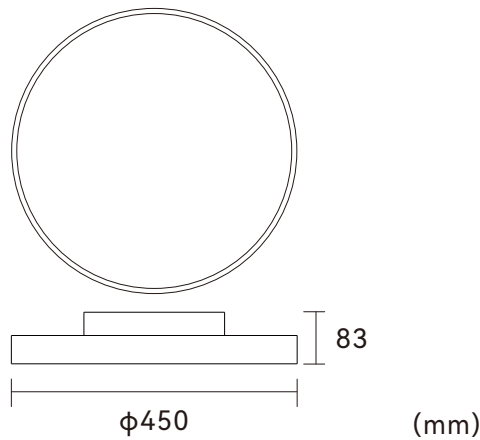

Item No.	BROC-4504028-NN-01	BROC-4504028-DN-01
Input Power(±10%)	30W(↑9W/ 21W ↓)/ 40W(↑12W/ 28W ↓) Power switchable	
Input Voltage	AC220~240V	
Power Factor	≥0.9	
Luminous Flux(±10%)	3900lm(↑1300lm/ 2600lm ↓) (30W)/ 5200lm(↑1700lm/ 3500lm ↓) (40W)	
UGR	<19	
Color Rendering Index	>80	
Life Time	L80(B10)50,000H	
Beam Angle	↑95°/ 95° ↓	
CCT(±200K)	3000K/ 4000K (CCT switchable)	
Colour consistency SDCM	<3	
Dimming	NO	DALI dimming
Sensor	NO	
Housing Color	Silver/ White/ Black	
Fixture Materia	6063AL	
Protection Level	IP20	
Storage Temperature	-40°C~+60°C	
Working Temperature	-20°C~+40°C	
Net Weight	3.1kg	
Gross Weight	4.4kg	
Package size	530*530*145mm	
20GP	770pcs	
40GP	1560pcs	
40HQ	1690pcs	


Technical data

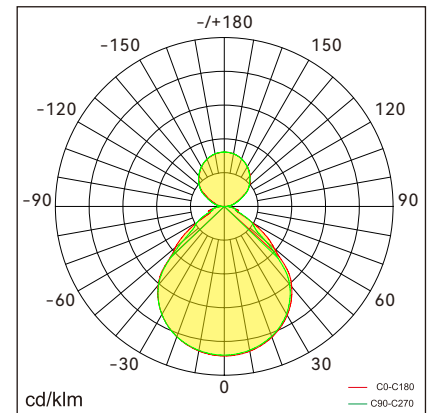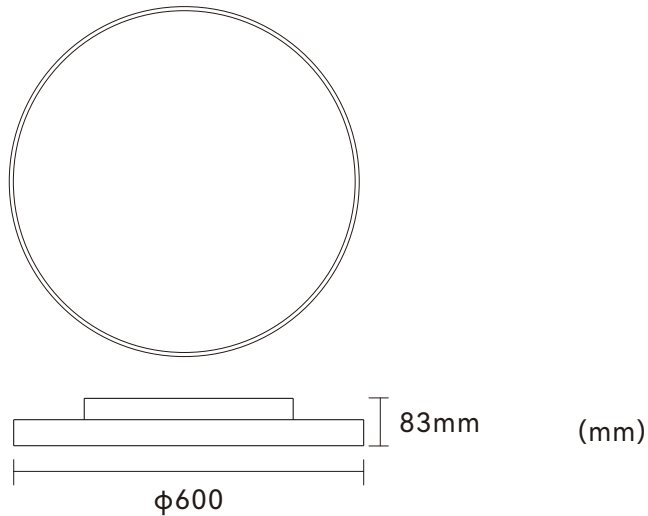


Item No.	BROC-6006042-NN-01	BROC-6006042-DN-01
Input Power(±10%)	48W(↑14W/ 34W↓)/ 60W(↑18W/ 42W↓) Power switchable	
Input Voltage	AC220~240V	
Power Factor	≥0.9	
Luminous Flux(±10%)	6720lm(↑1800lm/ 3940lm↓) (48W)/ 8400lm(↑2300lm/ 6100lm↓) (60W)	
UGR	<19	
Color Rendering Index	>80	
Life Time	L80(B10)50,000H	
Beam Angle	↑95°/ 95°↓	
CCT(±200K)	3000K/ 4000K (CCT switchable)	
Colour consistency SDCM	<3	
Dimming	NO	DALI dimming
Sensor	NO	
Housing Color	Silver/ White/ Black	
Fixture Materia	6063AL	
Protection Level	IP20	
Storage Temperature	-40°C~+60°C	
Working Temperature	-20°C~+40°C	
Net Weight	5.1kg	
Gross Weight	7.1kg	
Package size	680*680*145mm	
20GP	467pcs	
40GP	960pcs	
40HQ	1030pcs	

Packaging


φ350mm

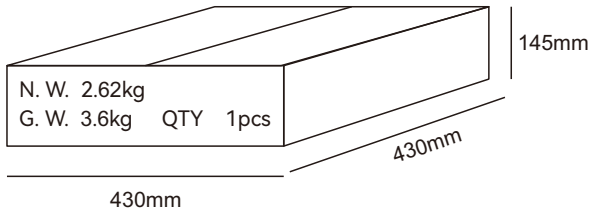

φ450mm

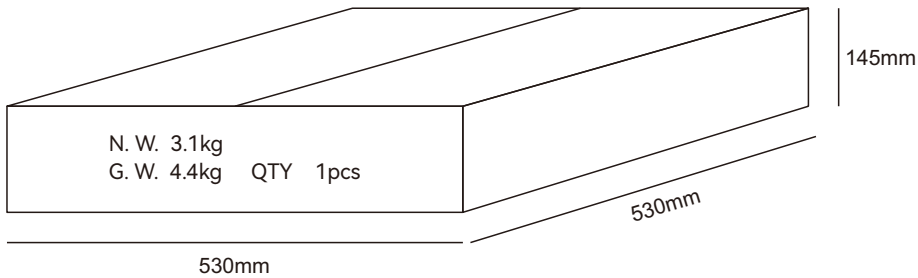

φ600mm

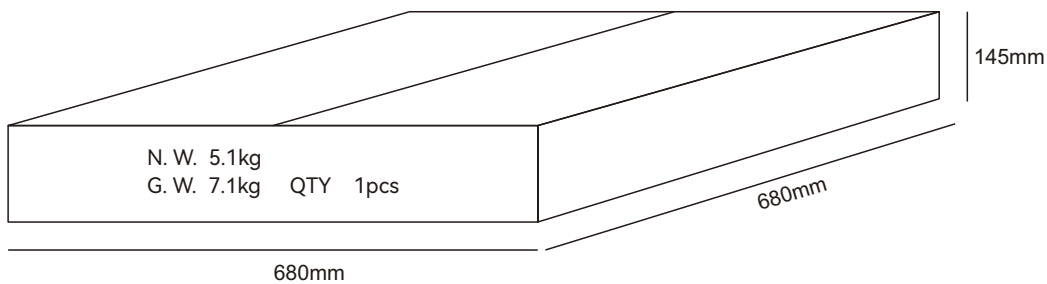

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.