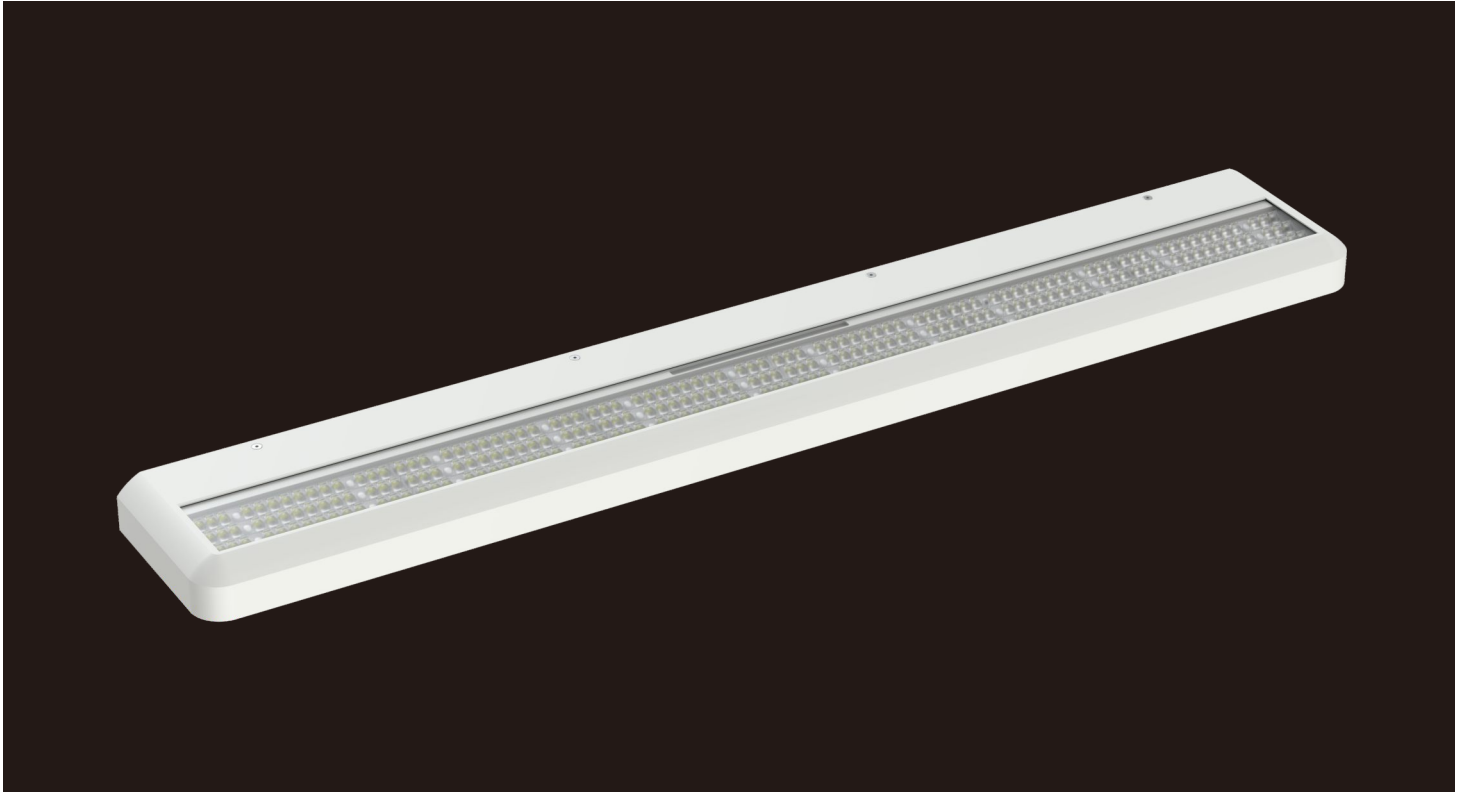


MEDI-W

 wall mounted luminaire

The Medi linear wall lamp is specially designed for spaces such as medical wards. It adopts lens polarized optics and provides five optical modes: ambient light, night light, inspection light, reading light and nursing light, meeting the different scene needs of the ward. Each type of light can be controlled through the touch panel, and it also supports DALI central control and realizes HCL function, providing flexible, safe and comfortable professional lighting for the ward.

Features

Compact and quality appearance, patent design with rich texture and visual impact

Five types of optical lenses specially developed for different medical scenarios

Each type of light can be controlled independently

The downward light emission adopts polarized optics, providing excellent anti-glare effect

SDCM < 3



5 years warranty

Application Areas

For open plan office, stairs, corridors, lobby, Break out area etc.



Technical data

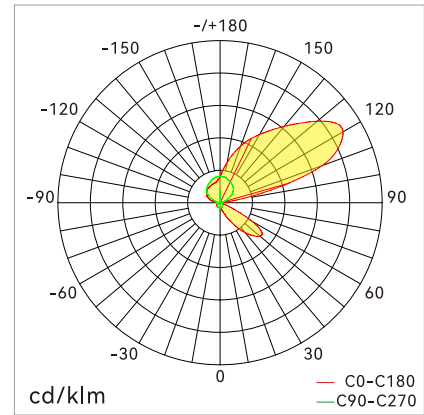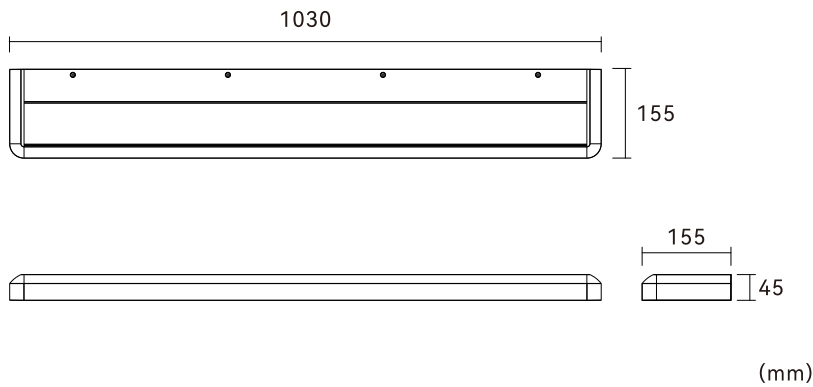

Item No.	BMEW-1014035-BN	BMEW-1020070-BN
Input Power(±10%)	140W (Room light: 100W/ Examination light: 24W/ Reading light: 10W/ Night light: 2W)	190W (Room light: 120W/ Examination light: 50W/ Reading light: 10W/ Nurse light: 8W/ Night light: 2W)
Input Voltage	AC220~240V	
Power Factor	≥0.95	
Luminous Flux(±10%)	13650lm (Room light: 11665lm/ Examination light: 1200lm/ Reading light: 665lm/ Night light: 120lm)	17850lm (Room light: 14200lm/ Examination light: 2515lm/ Reading light: 665lm/ Nurse light: 350lm/ Night light: 120lm)
Color Rendering Index	Room light/ Reading light/Night light: >90 Examination light: >97	Room light/ Reading light/Night light: >90 Examination light/ Nurse light: >97
Life Time	L80(B10)50,000H	
Optic	Asymmetric optics	
CCT(±200K)	Room light: 2700~6500K(HCL) Examination light/ Reading light/ Night light: 3000K	Room light: 2700~6500K(HCL) Examination light/ Reading light/ Nurse light/ Night light: 3000K
Colour consistency SDCM	<3	
Dimming	DALI dimming	
Sensor	NO	
Housing Color	Silver/ White/ Black	
Fixture Materia	6063AL	
Protection Level	IP20	
Storage Temperature	-40°C~+60°C	
Working Temperature	-10°C~+30°C	
Net Weight	5kg	

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report.

Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.