


EZY-C

Surface mounted luminaires

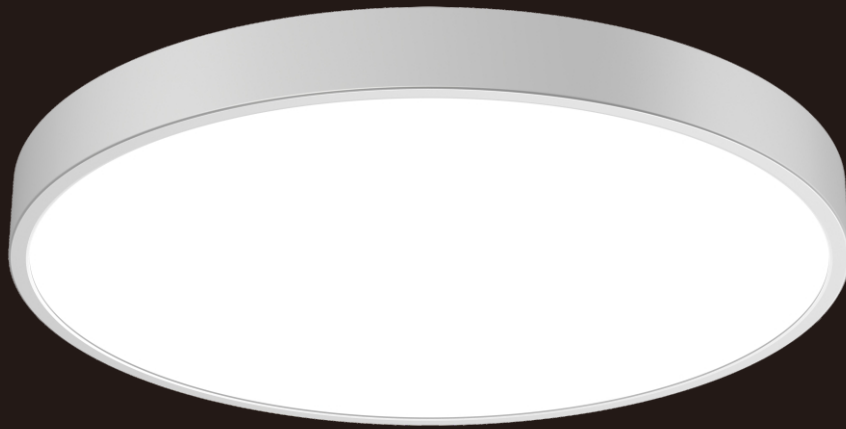

Simple, classic design with excellent craftwork. Appearance with rich texture. Extremely saving installation and maintenance time by revolutionary surface mounted structure. We offer $\phi 350\text{mm}$, $\phi 450\text{mm}$, $\phi 600\text{mm}$ for choosing. We use special anti-glare cover, Offering comfortable and soft lights for Indirect to support luminous environment. Typical value up to 140lm/W with flicker freely. Support smart functions like Motion sensor, Dali dimming, Tunable white and Emergency function. Work with CASAMBI wireless system to support group setting. Simply assembling structure, flexible to support customers' requirement. Profile aluminum and PMMA as main materials.

Features

Simple and exquisite industrial design with rich texture

Come with several size $\phi 350\text{mm}$, $\phi 450\text{mm}$, $\phi 600\text{mm}$

Power and CCT switchable

Light efficiency up to 140lm/W

Separate indirect light unit

Extremely simple for installation and maintenance




5 years warranty

Application Areas

Open-plan office, individual office, Cafeteria, Corridors, Break-out area, Classroom, etc.






Technical data

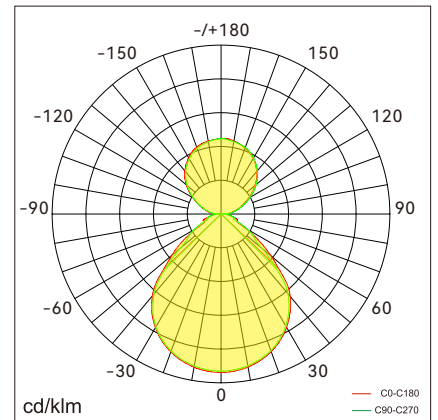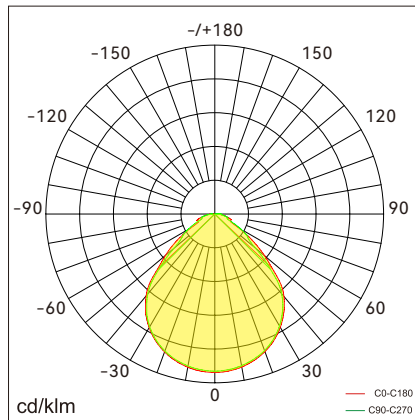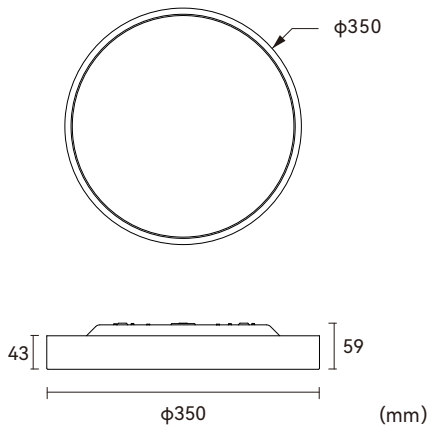




Item No.	BEZC-3502424-NN-01	BEZC-3502424-DN-01	BEZC-3502417-NN-01	BEZC-3502417-DN-01
Input Power($\pm 10\%$)	18W \downarrow /24W \downarrow power switchable		18W(\uparrow 6W/12W \downarrow)/24W(\uparrow 7W/17W \downarrow) power switchable	
Input Voltage	AC200~240V			
Power Factor	≥ 0.9			
Luminous Flux($\pm 10\%$)	2250lm \downarrow (18W)/3000lm \downarrow (24W)		2500lm(\uparrow 990lm/1510lm \downarrow) (18W) 3240lm(\uparrow 1140lm/2100lm \downarrow) (24W)	
UGR	< 22		< 19	
Color Rendering Index	> 80			
Life Time	L80(B10)50,000H			
Beam Angle	90° \downarrow		\uparrow 110°/90° \downarrow	
CCT(± 200 K)	3000/4000K CCT switchable			
Colour consistency SDCM	< 3			
Dimming	NO	Dali dimming	NO	Dali dimming
Sensor	NO			
Housing Color	Silver/White/Black			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	$-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$			
Working Temperature	$-20^{\circ}\text{C} \sim +45^{\circ}\text{C}$			
Net Weight	1.8kg		2kg	
Package size	430*430*125mm			
20GP	1040pcs			
40GP	2160pcs			

Technical data

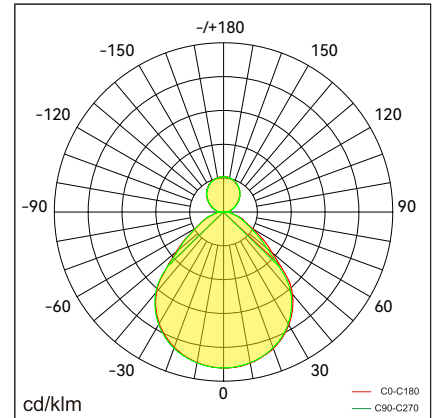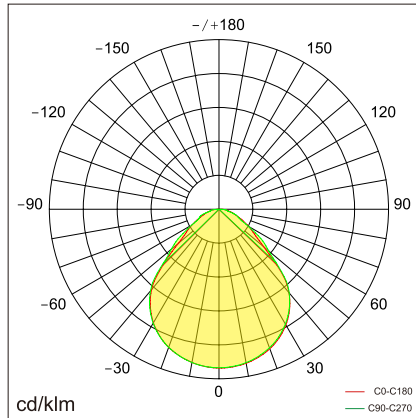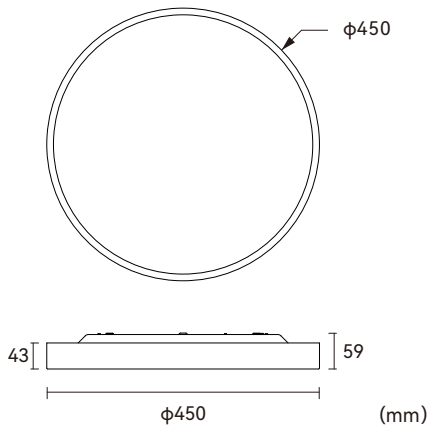




Item No.	BEZC-4504040-NN-01	BEZC-4504040-DN-01	BEZC-4504028-NN-01	BEZC-4504028-DN-01
Input Power($\pm 10\%$)	30W \downarrow /40W \downarrow power switchable		30W(\uparrow 9W/21W \downarrow)/40W(\uparrow 12W/28W \downarrow) power switchable	
Input Voltage	AC200~240V			
Power Factor	≥ 0.9			
Luminous Flux($\pm 10\%$)	3900lm \downarrow (30W)/5200lm \downarrow (40W)		4000lm(\uparrow 1250lm/2750lm \downarrow) (30W) 5300lm(\uparrow 1600lm/3700lm \downarrow) (40W)	
UGR	< 22		< 19	
Color Rendering Index	> 80			
Life Time	L80(B10)50,000H			
Beam Angle	$90^\circ \downarrow$		$\uparrow 110^\circ/90^\circ \downarrow$	
CCT($\pm 200K$)	3000/4000K CCT switchable			
Colour consistency SDCM	< 3			
Dimming	NO	Dali dimming	NO	Dali dimming
Sensor	NO			
Housing Color	Silver/White/Black			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	$-40^\circ C \sim +80^\circ C$			
Working Temperature	$-20^\circ C \sim +45^\circ C$			
Net Weight	2.7kg		3.3kg	
Package size	537*537*122mm			
20GP	800pcs			
40GP	1672pcs			

Technical data

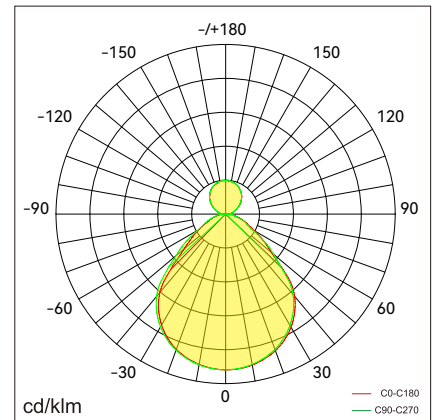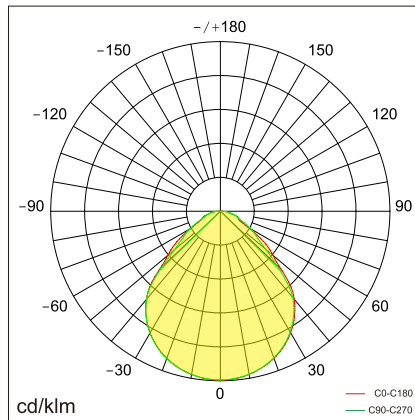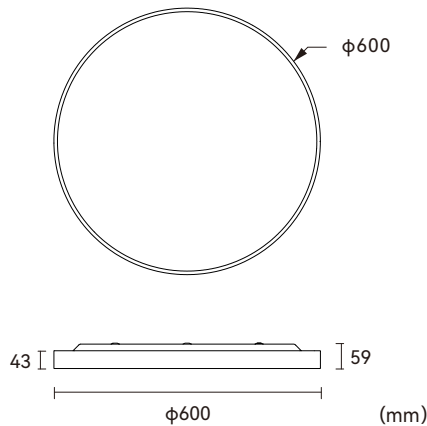

Item No.	BEZC-6006060-NN-01	BEZC-6006060-DN-01	BEZC-6006042-NN-01	BEZC-6006042-DN-01
Input Power(±10%)	48W ↓ /60W ↓ power switchable		48W(↑ 14W/34W ↓)/60W(↑ 18W/42W ↓) power switchable	
Input Voltage	AC200~240V			
Power Factor	≥0.9			
Luminous Flux(±10%)	6480lm ↓ (48W)/8100lm ↓ (60W)		6720lm(↑ 1500lm/5220lm ↓) (48W) 8400lm(↑ 2400lm/6000lm ↓) (60W)	
UGR	<22		<19	
Color Rendering Index	>80			
Life Time	L80(B10)50,000H			
Beam Angle	90° ↓		↑ 110°/90° ↓	
CCT(±200K)	3000/4000K CCT switchable			
Colour consistency SDCM	<3			
Dimming	NO	Dali dimming	NO	Dali dimming
Sensor	NO			
Housing Color	Silver/White/Black			
Fixture Materia	6063AL			
Protection Level	IP20			
Storage Temperature	-40°C~+80°C			
Working Temperature	-20°C~+45°C			
Net Weight	4.5kg		5.5kg	
Package size	687*687*122mm			
20GP	456pcs			
40GP	969pcs			

Packaging

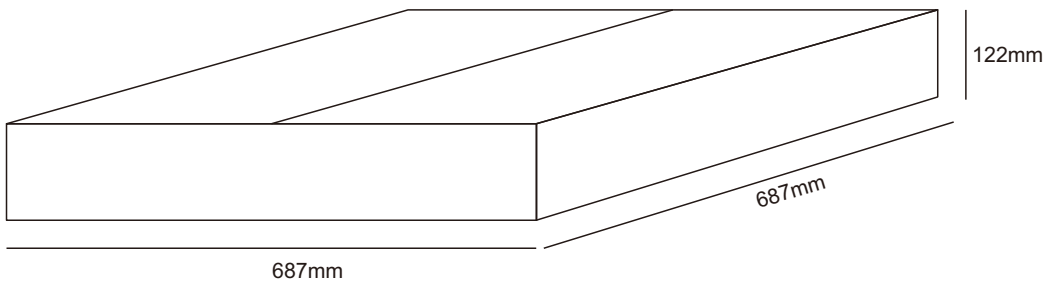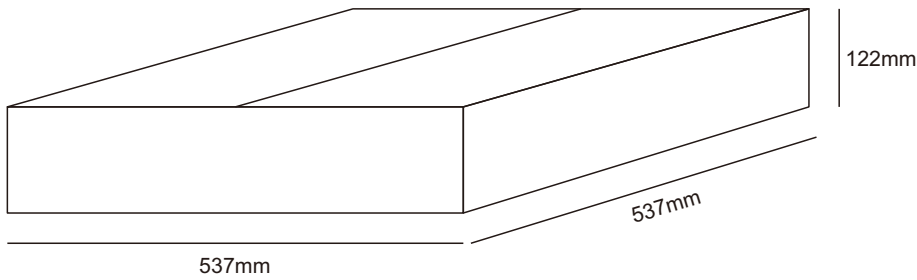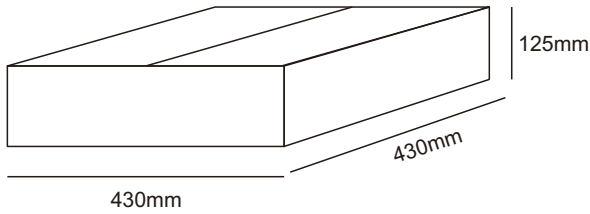

Shenzhen Nexol Lighting Technology Co.,Ltd.

E-mail: info@nexol-lighting.com

www.nexol-lighting.com

Factory: Floor 6-9, Building 3, Tonghu Intelligent Industrial Park, Zhongkai High-Tech District, HuiZhou 516035

Office: Room 306&309, Floor 3, Building E, Longhua Digital Industrial Park, Guanlan Road 54-6, Longhua district, Shenzhen, China 518110



All values in specification are typical value from laboratory measurement, for concrete data, please refer to shipment testing report. Information provided is subject to change without notice. Please verify all details with NEXOL Lighting.

Copyright Shenzhen Nexol Lighting Co., Ltd.. All rights reserved.